



# PrismaSeT P Active

**Catalog 2022**  
Cubicles up to 4000 A



[se.com](https://se.com)

Life Is On

**Schneider**  
Electric





# Table of contents

**Index**  
p. A-4

**Catalogue number index**  
> p. A-4

**Overview**  
p. B-1

**Promotional Pages**  
> p. B-2

**EcoStruxure™ Facility Expert**  
> p. B-4

**PowerLogic™ HeatTag**  
> p. B-11

**Standards and certifications**  
p. C-1

**Standards and tested switchboards**  
> p. C-2

**Enclosure characteristics**  
> p. C-7

**Selection guide**  
p. D-1

**Select a cubicle configuration**  
> p. D-2

**Functional units**  
p. E-1

**Circuit breakers**  
> p. E-2



**Switch-disconnectors**  
> p. E-39



**Source-changeover**  
> p. E-41



**Cubicles**  
p. F-1

**Enclosures**  
> p. F-2



**Dimensions**  
> p. F-7



**Enclosures**  
> p. F-14



**Linergy distribution systems**  
p. G-1


**Power busbars**  
> p. G-2



**Distribution blocks**  
> p. G-16




**Device feeders**  
> p. G-18



**Functional partitioning**  
p. H-1

**Main distribution**  
> p. H-4



**Additional information**  
p. I-1

**Spare parts**  
> p. I-4

**Electrical characteristics**  
> p. I-11

**After sales tools**  
p. J-1

**Practical information**  
> p. J-2

**Maintenance**  
> p. J-18



# PrismaSeT P Active

Index  
p. A-4

A

## Overview

> p. B-14

Overview  
p. B-1

B

Thermal characteristics  
of switchboards > p. C-9

Specific application  
> p. C-17

Standards and  
certifications  
p. C-1

C

Selection guide  
p. D-1

D

Fusegear  
> p. E-56




Dd83777 eps

Fusegear/Switch-disconnector  
> p. E-57



DD119396 ai

Others  
> p. E-59



DD384570 eps

Functional units  
p. E-1

E

Others  
> p. F-23



DD119392 ai

Cubicles  
p. F-1

F

Secondary distribution  
> p. G-22



DD119394 ai

Terminal blocks and lines  
> p. G-37



DD119395 ai

Linery distribution  
systems  
p. G-1

G

Functional partitioning  
p. H-1

H

Additional information  
p. I-1

I

After sales tools  
p. J-1

J

## Index Of Commercial References

| Com. no.        | Page       | Com. no. | Page                                                | Com. no. | Page                                                 |
|-----------------|------------|----------|-----------------------------------------------------|----------|------------------------------------------------------|
| <b>LVS01...</b> |            |          |                                                     |          |                                                      |
| LVS01005        | A-12, F-22 | LVS03195 | A-12, F-24                                          | LVS03330 | E-35                                                 |
| LVS01006        | A-12, F-22 | LVS03196 | A-12, F-24                                          | LVS03331 | E-35                                                 |
| LVS01007        | A-12, F-22 | LVS03197 | A-12, F-24                                          | LVS03342 | A-4, A-13, E-60,<br>E-66, F-23                       |
| LVS01008        | A-12, F-22 | LVS03198 | A-12, F-24                                          | LVS03343 | A-4, A-13, E-63,<br>F-23                             |
| LVS01094        | I-5        | LVS03199 | A-12, F-24                                          | LVS03344 | A-4, A-13, E-63,<br>F-23                             |
| LVS01100        | I-6        | LVS03202 | E-66                                                | LVS03345 | A-13, F-23                                           |
| LVS01101        | I-5        | LVS03203 | E-60, E-61, E-66                                    | LVS03346 | E-58                                                 |
| LVS01102        | I-6        | LVS03204 | E-61, E-62                                          | LVS03347 | E-58                                                 |
| LVS01103        | I-6        | LVS03205 | E-36, E-37, E-60,<br>E-62                           | LVS03349 | E-58                                                 |
| LVS01104        | I-4        | LVS03206 | E-54                                                | LVS03352 | A-13, F-23                                           |
| LVS01105        | I-7        | LVS03207 | E-55                                                | LVS03353 | A-13, F-23                                           |
| LVS01106        | I-5        | LVS03213 | E-61                                                | LVS03354 | A-13, F-23                                           |
| LVS01109        | G-4, G-7   | LVS03214 | E-61, E-62                                          | LVS03401 | A-4, A-13, E-60,<br>E-61, E-62, E-66,<br>F-26        |
| LVS01110        | I-5        | LVS03220 | A-4, A-12, E-36,<br>E-37, E-61, E-62,<br>E-66, F-22 | LVS03402 | A-4, A-13, E-37,<br>E-60, E-66, F-26,<br>G-40        |
| LVS01112        | I-6        | LVS03221 | A-4, A-12, E-36,<br>E-37, E-61, E-62,<br>E-66, F-22 | LVS03404 | E-61, E-62, E-66                                     |
| LVS01120        | I-7        | LVS03222 | A-4, A-12, E-31,<br>E-32, E-33, E-34,<br>F-22       | LVS03405 | E-38                                                 |
| LVS01121        | I-7        | LVS03223 | E-61                                                | LVS03406 | E-36                                                 |
| LVS01123        | I-6        | LVS03225 | E-38                                                | LVS03409 | E-35                                                 |
| LVS01124        | I-7        | LVS03226 | E-36                                                | LVS03410 | E-36                                                 |
| LVS01126        | I-8        | LVS03227 | E-36                                                | LVS03411 | E-20                                                 |
| LVS01127        | I-8        | LVS03235 | E-52                                                | LVS03412 | E-20, E-40                                           |
| LVS01128        | I-8        | LVS03241 | E-31, E-32                                          | LVS03413 | E-21, E-22, E-23                                     |
| LVS01130        | G-13, I-4  | LVS03243 | E-29, E-31, E-32,<br>E-33, E-34                     | LVS03414 | E-21, E-22, E-23                                     |
| LVS01198        | I-6        | LVS03244 | E-29, E-33, E-34                                    | LVS03415 | E-24                                                 |
| LVS01199        | I-6        | LVS03245 | E-50                                                | LVS03416 | E-36                                                 |
| LVS01201        | G-14, I-4  | LVS03247 | E-53                                                | LVS03417 | E-42, E-43, E-44,<br>E-45, E-46, E-47,<br>E-48, E-51 |
| LVS01202        | G-27, I-4  | LVS03248 | E-40                                                | LVS03420 | E-31, E-40                                           |
| LVS01210        | G-14, I-4  | LVS03249 | A-4, A-12, E-31,<br>E-32, E-33, E-34,<br>F-22       | LVS03421 | E-29, E-32                                           |
| LVS01211        | G-14       | LVS03253 | E-30                                                | LVS03422 | E-33, E-34                                           |
| LVS01215        | A-12, F-27 | LVS03274 | E-40                                                | LVS03423 | E-32                                                 |
| LVS01219        | I-7        | LVS03275 | E-25, E-26, E-27,<br>E-28, E-29                     | LVS03424 | E-54                                                 |
| LVS01224        | F-14       | LVS03283 | E-30                                                | LVS03425 | E-55                                                 |
| LVS01225        | F-14       | LVS03293 | E-30                                                | LVS03428 | E-50, E-52, E-53                                     |
| <b>LVS03...</b> |            |          |                                                     |          |                                                      |
| LVS03030        | F-25       | LVS03297 | E-25, E-26, E-27,<br>E-28, E-29                     | LVS03451 | E-20                                                 |
| LVS03050        | E-30       | LVS03299 | E-30                                                | LVS03452 | E-20, E-40                                           |
| LVS03051        | E-30       | LVS03308 | E-58                                                | LVS03453 | E-21, E-22, E-23                                     |
| LVS03152        | E-63       | LVS03309 | E-58                                                | LVS03454 | E-21, E-22, E-23                                     |
| LVS03164        | A-12, F-24 | LVS03320 | E-57                                                | LVS03457 | E-51                                                 |
| LVS03165        | A-12, F-24 | LVS03321 | E-57                                                | LVS03458 | E-50, E-52, E-53                                     |
| LVS03166        | A-12, F-24 | LVS03322 | E-57                                                | LVS03460 | E-22                                                 |
| LVS03180        | A-12, F-24 | LVS03323 | E-57                                                | LVS03461 | E-25, E-26, E-27,<br>E-28, E-29, E-40                |
| LVS03181        | A-12, F-24 | LVS03324 | E-57                                                | LVS03462 | E-24                                                 |
| LVS03182        | A-12, F-24 | LVS03325 | E-57                                                | LVS03480 | E-17                                                 |
| LVS03185        | A-12, F-24 |          |                                                     | LVS03482 | E-15, E-16                                           |
| LVS03186        | A-12, F-24 |          |                                                     |          |                                                      |
| LVS03187        | A-12, F-24 |          |                                                     |          |                                                      |
| LVS03194        | A-12, F-24 |          |                                                     |          |                                                      |



| Com. no. | Page                                            | Com. no. | Page                                                                                                           | Com. no. | Page                                                                                                                                         |
|----------|-------------------------------------------------|----------|----------------------------------------------------------------------------------------------------------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------|
| LVS03483 | E-10, E-11, E-15, E-16, E-46, E-47, E-48        | LVS03616 | E-51                                                                                                           | LVS03802 | A-5, A-15, D-3, E-10, E-14, E-15, E-25, E-26, E-27, E-28, E-29, E-31, E-32, E-33, E-34, E-36, E-40, E-46, E-48, E-50, E-52, E-53, E-57, F-23 |
| LVS03484 | E-10, E-11, E-46, E-47, E-48                    | LVS03617 | E-40                                                                                                           | LVS03803 | A-5, A-15, D-3, E-10, E-11, E-15, E-16, E-25, E-26, E-27, E-28, E-29, E-31, E-32, E-33, E-39, E-46, E-47, E-48, E-50, E-60, F-23, G-40       |
| LVS03487 | E-18, E-30                                      | LVS03618 | E-24                                                                                                           | LVS03804 | A-5, A-15, D-3, E-2, E-4, E-8, E-9, E-10, E-14, E-15, E-25, E-27, E-39, E-42, E-44, E-46, E-48, E-60, E-66, F-23                             |
| LVS03488 | E-12, E-18                                      | LVS03620 | E-40                                                                                                           | LVS03805 | A-5, A-15, D-3, E-2, E-4, E-11, E-16, E-25, E-27, E-42, E-43, E-44, E-60, F-23, G-40                                                         |
| LVS03489 | E-12                                            | LVS03643 | E-20, E-21, E-22, E-23                                                                                         | LVS03806 | A-5, A-15, D-3, E-8, E-11, E-14, E-16, E-42, E-43, E-44, E-45, E-60, E-63, F-23, G-40                                                        |
| LVS03491 | E-49                                            | LVS03644 | E-20, E-21, E-22, E-23                                                                                         | LVS03808 | A-5, A-15, E-6, F-23                                                                                                                         |
| LVS03500 | E-2, E-4, E-6, E-8, E-9, E-42, E-43, E-44, E-45 | LVS03656 | E-51                                                                                                           | LVS03811 | A-5, A-15, E-30, E-38, E-62, F-23                                                                                                            |
| LVS03501 | E-14, E-39                                      | LVS03657 | E-24                                                                                                           | LVS03812 | A-5, A-15, E-30, E-38, F-23                                                                                                                  |
| LVS03545 | E-56                                            | LVS03658 | E-40                                                                                                           | LVS03813 | A-15, F-23                                                                                                                                   |
| LVS03546 | E-56                                            | LVS03659 | E-50, E-52                                                                                                     | LVS03814 | A-5, A-15, E-30, E-66, F-23                                                                                                                  |
| LVS03553 | E-57                                            | LVS03661 | E-53                                                                                                           | LVS03815 | A-15, F-23                                                                                                                                   |
| LVS03554 | E-57                                            | LVS03663 | E-25, E-26, E-27, E-28, E-29                                                                                   | LVS03816 | A-5, A-15, E-30, F-23                                                                                                                        |
| LVS03555 | E-57                                            | LVS03666 | E-25, E-26, E-27, E-28, E-29                                                                                   | LVS03817 | A-15, F-23                                                                                                                                   |
| LVS03556 | E-57                                            | LVS03671 | E-42, E-43, E-44, E-45, E-46, E-47, E-48, E-51                                                                 | LVS03891 | F-30                                                                                                                                         |
| LVS03557 | E-57                                            | LVS03687 | E-17                                                                                                           | LVS03895 | F-30                                                                                                                                         |
| LVS03559 | E-58                                            | LVS03690 | E-15                                                                                                           | LVS03900 | E-12, E-18, E-65                                                                                                                             |
| LVS03560 | E-58                                            | LVS03691 | E-10, E-11, E-15, E-16, E-46, E-47, E-48                                                                       | LVS03901 | E-12, E-18, E-65                                                                                                                             |
| LVS03561 | E-4, E-11, E-16                                 | LVS03692 | E-10, E-11, E-46, E-47, E-48                                                                                   | LVS03902 | E-12, E-18, E-65                                                                                                                             |
| LVS03563 | E-58                                            | LVS03695 | E-49                                                                                                           | LVS03903 | E-12, E-18, E-65                                                                                                                             |
| LVS03564 | E-58                                            | LVS03697 | E-18                                                                                                           | LVS03904 | E-64, E-65                                                                                                                                   |
| LVS03565 | E-58                                            | LVS03698 | E-12                                                                                                           | LVS03907 | E-65                                                                                                                                         |
| LVS03566 | E-58                                            | LVS03699 | E-12, E-18                                                                                                     | LVS03908 | E-65                                                                                                                                         |
| LVS03567 | E-58                                            | LVS03701 | E-16                                                                                                           | LVS03910 | E-64, E-65                                                                                                                                   |
| LVS03569 | A-14, F-25                                      | LVS03709 | E-8, E-9                                                                                                       | LVS03911 | E-64, E-65, E-66                                                                                                                             |
| LVS03570 | A-14, F-25                                      | LVS03710 | E-2, E-4, E-6, E-8, E-42, E-43, E-44, E-45                                                                     | LVS03912 | E-64                                                                                                                                         |
| LVS03571 | A-4, A-14, E-60, F-26                           | LVS03711 | E-2, E-4, E-6, E-42, E-43, E-44, E-45                                                                          | LVS03913 | E-64, E-65, E-66                                                                                                                             |
| LVS03572 | A-4, A-14, E-60, F-26                           | LVS03713 | E-39                                                                                                           | LVS03914 | E-64, E-65                                                                                                                                   |
| LVS03574 | A-14, F-26                                      | LVS03714 | E-39                                                                                                           | LVS03923 | E-65, E-66                                                                                                                                   |
| LVS03580 | A-14, F-24                                      | LVS03715 | E-39                                                                                                           | LVS03928 | E-64, E-65                                                                                                                                   |
| LVS03581 | A-4, A-14, F-24, F-26, F-28, G-40               | LVS03716 | E-14                                                                                                           | LVS03930 | E-66                                                                                                                                         |
| LVS03582 | A-14, F-24, F-28                                | LVS03722 | A-5, A-14, E-12, E-18, F-23                                                                                    | LVS03932 | E-66                                                                                                                                         |
| LVS03583 | A-4, A-14, F-24, H-6                            | LVS03723 | E-12, E-18                                                                                                     | LVS03970 | E-59                                                                                                                                         |
| LVS03584 | A-4, A-14, E-7, F-20, F-28, G-40                | LVS03735 | E-56                                                                                                           |          |                                                                                                                                              |
| LVS03586 | A-4, A-14, E-7, F-20, F-28                      | LVS03736 | E-56                                                                                                           |          |                                                                                                                                              |
| LVS03587 | A-14, F-20, F-28                                | LVS03740 | E-56                                                                                                           |          |                                                                                                                                              |
| LVS03590 | A-14, F-26                                      | LVS03741 | E-56                                                                                                           |          |                                                                                                                                              |
| LVS03593 | A-14, F-25, F-26, F-28                          | LVS03801 | A-5, A-15, D-3, E-10, E-25, E-26, E-27, E-28, E-29, E-31, E-32, E-33, E-34, E-36, E-40, E-47, E-58, E-60, F-23 |          |                                                                                                                                              |
| LVS03595 | A-4, A-14, E-63, F-25, G-15                     |          |                                                                                                                |          |                                                                                                                                              |
| LVS03596 | A-4, A-14, E-30, F-25                           |          |                                                                                                                |          |                                                                                                                                              |
| LVS03604 | E-20, E-21, E-22, E-23                          |          |                                                                                                                |          |                                                                                                                                              |
| LVS03606 | E-20, E-21, E-22, E-23                          |          |                                                                                                                |          |                                                                                                                                              |

## Index Of Commercial References

| Com. no.        | Page             | Com. no. | Page                  | Com. no. | Page                               |
|-----------------|------------------|----------|-----------------------|----------|------------------------------------|
| LVS03979        | E-59             | LVS04127 | G-14                  | LVS04403 | E-31, G-18                         |
| <b>LVS04...</b> |                  | LVS04128 | G-14                  | LVS04404 | E-31, E-40, G-18                   |
| LVS04004        | G-27             | LVS04129 | G-14                  | LVS04405 | E-32, E-33, E-34, G-18             |
| LVS04008        | G-27             | LVS04130 | G-15                  | LVS04406 | E-32, E-33, E-34, G-18             |
| LVS04012        | G-27             | LVS04145 | G-15                  | LVS04407 | E-31, E-32, E-33, E-34, G-18       |
| LVS04013        | G-27             | LVS04146 | E-36                  | LVS04408 | E-31, E-32, E-33, E-34, E-40, G-18 |
| LVS04014        | G-27             | LVS04146 | G-15                  | LVS04410 | E-36, G-20                         |
| LVS04018        | G-27             | LVS04147 | G-15                  | LVS04411 | E-36, G-20                         |
| LVS04021        | G-14, G-15, G-27 | LVS04148 | G-15                  | LVS04412 | E-36, G-20                         |
| LVS04024        | G-27             | LVS04149 | E-37, G-24            | LVS04413 | E-36, G-20                         |
| LVS04026        | G-27             | LVS04150 | G-14                  | LVS04416 | E-36, G-20                         |
| LVS04029        | G-27             | LVS04151 | G-14                  | LVS04417 | E-36, G-20                         |
| LVS04030        | E-35, G-27       | LVS04152 | G-14                  | LVS04418 | E-36, G-20                         |
| LVS04031        | E-37, G-24       | LVS04155 | G-14                  | LVS04419 | E-36, G-20                         |
| LVS04033        | G-16             | LVS04156 | G-16                  | LVS04420 | E-36, G-20                         |
| LVS04034        | G-16             | LVS04158 | G-14                  | LVS04423 | E-20                               |
| LVS04038        | G-17             | LVS04161 | G-9, G-10             | LVS04424 | E-20                               |
| LVS04039        | E-35, E-37       | LVS04162 | G-9, G-10             | LVS04425 | E-20                               |
| LVS04039        | G-17             | LVS04163 | G-9, G-10             | LVS04426 | E-20                               |
| LVS04040        | G-24             | LVS04171 | G-9, G-10             | LVS04427 | E-22, E-23, E-24, E-40             |
| LVS04041        | G-24             | LVS04172 | G-9, G-10             | LVS04428 | E-22, E-23, E-24, E-40             |
| LVS04045        | E-37, G-24       | LVS04173 | G-9, G-10             | LVS04429 | E-20, E-21, E-22, E-23, E-24       |
| LVS04046        | E-37, G-24       | LVS04174 | G-9, G-10             | LVS04430 | E-20, E-21, E-22, E-23, E-24       |
| LVS04047        | E-37, G-24       | LVS04191 | E-35, E-36, G-9       | LVS04431 | E-21, E-24                         |
| LVS04052        | G-11             | LVS04192 | E-35, E-36, G-10      | LVS04432 | E-21, E-24                         |
| LVS04053        | G-11             | LVS04194 | G-12                  | LVS04453 | E-20                               |
| LVS04054        | G-11             | LVS04195 | G-12                  | LVS04454 | E-20                               |
| LVS04055        | G-11             | LVS04197 | G-10                  | LVS04455 | E-20                               |
| LVS04060        | G-15             | LVS04198 | G-9                   | LVS04456 | E-20                               |
| LVS04061        | G-15             | LVS04200 | G-38                  | LVS04459 | E-20, E-21, E-22, E-23, E-24       |
| LVS04070        | G-15             | LVS04201 | G-38                  | LVS04460 | E-20, E-21, E-22, E-23, E-24       |
| LVS04071        | G-15             | LVS04202 | G-38                  | LVS04461 | E-21, E-24                         |
| LVS04074        | G-15             | LVS04205 | G-38                  | LVS04462 | E-21, E-24                         |
| LVS04103        | G-14             | LVS04210 | G-38                  | LVS04473 | E-17, I-21, I-35                   |
| LVS04104        | G-14             | LVS04214 | G-38                  | LVS04474 | E-17, I-22, I-36                   |
| LVS04107        | G-14             | LVS04215 | G-38                  | LVS04475 | E-10, E-11, I-21, I-35             |
| LVS04108        | G-14             | LVS04224 | A-17, F-24            | LVS04476 | E-10, E-11, I-21, I-3              |
| LVS04111        | G-14             | LVS04226 | A-5, A-17, F-26, G-40 | LVS04477 | E-10, E-11, E-16, I-20, I-34       |
| LVS04112        | G-14             | LVS04229 | G-13                  | LVS04477 | E-15                               |
| LVS04113        | G-14             | LVS04233 | A-17, F-27            | LVS04478 | E-10, E-11, E-15, E-16, I-20, I-34 |
| LVS04114        | G-14             | LVS04234 | A-17, F-27            | LVS04481 | E-39                               |
| LVS04116        | G-14             | LVS04235 | A-17, F-27            | LVS04482 | E-39                               |
| LVS04117        | G-14             | LVS04239 | A-17, F-27            | LVS04483 | E-17, I-49                         |
| LVS04118        | G-14             | LVS04243 | A-17, F-27            |          |                                    |
| LVS04119        | G-14             | LVS04255 | A-17, F-27            |          |                                    |
| LVS04121        | G-14             | LVS04256 | A-17, F-27            |          |                                    |
| LVS04122        | G-14             | LVS04257 | A-17, F-27            |          |                                    |
| LVS04123        | G-14             | LVS04262 | A-17, F-27            |          |                                    |
| LVS04124        | G-14             | LVS04263 | A-17, F-27            |          |                                    |
| LVS04126        | G-14             | LVS04267 | A-17, F-27            |          |                                    |

## Index Of Commercial References

| Com. no. | Page                               | Com. no. | Page                                                                         | Com. no. | Page                               |
|----------|------------------------------------|----------|------------------------------------------------------------------------------|----------|------------------------------------|
| LVS04484 | E-17, I-49                         | LVS04603 | G-5                                                                          | LVS04711 | E-16, E-11                         |
| LVS04485 | E-15, I-20, I-34                   | LVS04604 | G-5                                                                          | LVS04712 | E-11, E-16                         |
| LVS04485 | E-16                               | LVS04605 | G-5                                                                          | LVS04713 | E-11, E-16                         |
| LVS04486 | E-15, E-16, I-20, I-34             | LVS04607 | G-5                                                                          | LVS04714 | E-11, E-16                         |
| LVS04487 | E-15, E-16, I-20, I-34             | LVS04620 | G-2                                                                          | LVS04715 | E-4                                |
| LVS04488 | E-15, E-16, I-20, I-34             | LVS04621 | G-2                                                                          | LVS04716 | E-4                                |
| LVS04489 | E-10, E-11, I-21, I-35             | LVS04623 | G-2                                                                          | LVS04725 | E-4                                |
| LVS04490 | E-10, E-11, I-21, I-35             | LVS04624 | G-2                                                                          | LVS04726 | E-4                                |
| LVS04491 | E-10, E-11, E-15, E-16, I-20, I-34 | LVS04634 | G-4                                                                          | LVS04735 | E-4                                |
| LVS04492 | E-10, E-11, E-15, E-16, I-20, I-34 | LVS04635 | G-4, G-7, G-8                                                                | LVS04736 | E-4                                |
| LVS04493 | E-3, E-5                           | LVS04636 | E-13, E-19, G-4, G-6, G-7, G-8, G-39                                         | LVS04742 | G-22, G-23                         |
| LVS04493 | E-3, E-5                           | LVS04637 | E-7, G-6                                                                     | LVS04743 | G-22, G-23                         |
| LVS04494 | E-3, E-5                           | LVS04638 | G-4, G-6                                                                     | LVS04746 | G-22, G-23                         |
| LVS04495 | E-3, E-5                           | LVS04640 | G-3                                                                          | LVS04751 | G-22, G-23                         |
| LVS04496 | E-3, E-5                           | LVS04641 | G-3                                                                          | LVS04752 | G-22, G-23                         |
| LVS04497 | E-3, E-5                           | LVS04642 | E-7                                                                          | LVS04753 | G-22, G-23                         |
| LVS04498 | E-3, E-5                           | LVS04643 | G-3                                                                          | LVS04759 | G-13                               |
| LVS04502 | G-4, G-7, G-39, I-13               | LVS04645 | G-6                                                                          | LVS04766 | G-13, G-39                         |
| LVS04503 | G-4, G-7, G-39, I-13               | LVS04646 | G-2, G-5                                                                     | LVS04767 | G-13                               |
| LVS04504 | G-4, G-7                           | LVS04651 | G-4                                                                          | LVS04768 | G-13                               |
| LVS04505 | G-4, G-7, G-39, I-13               | LVS04652 | G-7                                                                          | LVS04769 | G-13                               |
| LVS04506 | G-4, G-7                           | LVS04653 | G-8                                                                          | LVS04773 | G-13                               |
| LVS04507 | G-5                                | LVS04656 | G-39                                                                         | LVS04774 | G-13                               |
| LVS04508 | G-5                                | LVS04657 | G-39                                                                         | LVS04775 | G-13                               |
| LVS04509 | G-5                                | LVS04658 | G-5                                                                          | LVS04782 | G-6, G-13                          |
| LVS04510 | G-5                                | LVS04659 | G-5                                                                          | LVS04783 | G-13                               |
| LVS04512 | G-39                               | LVS04661 | G-5, G-6                                                                     | LVS04784 | G-13                               |
| LVS04515 | G-39                               | LVS04662 | E-3, E-5, E-10, E-11, E-13, E-14, E-15, E-16, E-19, E-39, G-2, G-3, G-5, G-6 | LVS04785 | G-13                               |
| LVS04516 | G-6, G-8                           | LVS04663 | G-5, G-6                                                                     | LVS04786 | G-13                               |
| LVS04518 | G-6, G-8                           | LVS04664 | G-2, G-3                                                                     | LVS04787 | G-13                               |
| LVS04525 | G-8                                | LVS04665 | G-2                                                                          | LVS04788 | G-13                               |
| LVS04526 | G-8                                | LVS04666 |                                                                              | LVS04794 | G-13                               |
| LVS04528 | G-6, G-8                           | LVS04667 | A-6, A-19, F-24, G-39                                                        | LVS04809 | E-31, E-32, E-33, E-34, E-40, G-19 |
| LVS04536 | G-3                                | LVS04672 | G-39                                                                         | LVS04810 | E-36, G-21                         |
| LVS04538 | G-3                                | LVS04678 | G-2                                                                          | LVS04842 | E-17                               |
| LVS04545 | G-3                                | LVS04683 | E-3, E-5                                                                     | LVS04851 | E-15, H-4                          |
| LVS04546 | G-3                                | LVS04684 | E-3, E-5                                                                     | LVS04851 | H-4                                |
| LVS04548 | G-3                                | LVS04685 | E-3, E-5                                                                     | LVS04852 | E-10, E-15, H-4                    |
| LVS04550 | G-3, G-6                           | LVS04687 | E-3, E-5                                                                     | LVS04852 | H-4                                |
| LVS04552 | G-3, G-6                           | LVS04690 | E-7                                                                          | LVS04853 | E-15, H-4                          |
| LVS04560 | G-2, G-5                           | LVS04691 | E-10, E-13, E-15, E-19                                                       | LVS04853 | H-4                                |
| LVS04561 | G-2, G-5                           | LVS04692 | E-13, E-19                                                                   | LVS04854 | E-10, E-15, H-4                    |
| LVS04562 | G-2, G-5                           | LVS04693 | E-10, E-11, E-15, E-16                                                       | LVS04854 | H-4                                |
| LVS04563 | G-2, G-5                           | LVS04694 | E-2, E-4, E-6, E-14, E-39                                                    | LVS04855 | E-13, E-19                         |
| LVS04564 | G-2, G-5                           | LVS04703 | E-16, E-11                                                                   | LVS04860 | E-7, E-56                          |
| LVS04565 | G-2                                | LVS04704 | E-11, E-16                                                                   | LVS04861 | E-2, E-6, E-8, H-4                 |
| LVS04566 | G-2                                |          |                                                                              | LVS04861 | H-4                                |
| LVS04567 | G-2                                |          |                                                                              | LVS04863 | E-2, H-4                           |
| LVS04568 | G-2                                |          |                                                                              | LVS04863 | H-4                                |
| LVS04602 | G-4, G-5, G-7, G-39                |          |                                                                              | LVS04871 | H-4                                |



## Index Of Commercial References

| Com. no.        | Page            | Com. no.        | Page                                | Com. no. | Page                           |
|-----------------|-----------------|-----------------|-------------------------------------|----------|--------------------------------|
| LVS04901        | H-6             | <b>LVS08...</b> |                                     | LVS08585 | A-21, F-22                     |
| LVS04911        | H-8             | LVS08403        | A-7, A-21, F-5, F-20                | LVS08593 | F-14                           |
| LVS04920        | H-5             | LVS08404        | A-7, A-21, F-5, F-20                | LVS08594 | F-14                           |
| LVS04921        | H-5             | LVS08406        | A-7, A-21, F-2, F-3, F-4, F-5, F-20 | LVS08603 | A-7, A-22, F-2, F-5, F-20      |
| LVS04922        | H-5             | LVS08407        | F-3, F-4, F-5                       | LVS08604 | A-7, A-22, F-5, F-20           |
| LVS04924        | H-5             | LVS08408        | F-5                                 | LVS08606 | A-7, A-22, F-2, F-4, F-5, F-20 |
| LVS04925        | H-4             | LVS08433        | F-15                                | LVS08607 | A-7, A-22, F-2, F-4, F-5, F-20 |
| LVS04926        | E-14, E-39, H-4 | LVS08434        | F-15                                | LVS08608 | F-5                            |
| LVS04927        | E-3, E-5        | LVS08436        | F-2, F-3, F-4, F-15                 | LVS08633 | F-2, F-15                      |
| LVS04928        | H-4             | LVS08438        | F-3, F-4, F-15                      | LVS08634 | F-15                           |
| LVS04943        | H-6             | LVS08456        | F-4                                 | LVS08636 | F-2, F-4, F-15                 |
| LVS04946        | H-7             | LVS08458        | F-4                                 | LVS08638 | F-2, F-4, F-15                 |
| LVS04951        | H-7             | LVS08476        | F-32                                | LVS08640 | F-2, F-15                      |
| LVS04952        | H-7             | LVS08478        | E-59, F-32                          | LVS08641 | F-15                           |
| LVS04953        | H-7             | LVS08483        | A-21, F-19                          | LVS08642 | F-4, F-15                      |
| LVS04954        | H-7             | LVS08484        | A-21, F-19                          | LVS08643 | F-2, F-3, F-15                 |
| LVS04955        | H-6             | LVS08486        | A-7, A-21, F-2, F-3, F-4, F-19      | LVS08656 | F-4                            |
| LVS04956        | H-6             | LVS08487        | F-3, F-4, F-19                      | LVS08658 | F-4                            |
| LVS04963        | H-5             | LVS08488        | F-19                                | LVS08676 | F-32                           |
| LVS04964        | H-5             | LVS08493        | F-19                                | LVS08678 | E-59, F-32                     |
| LVS04966        | H-5             | LVS08494        | A-21, F-19                          | LVS08683 | A-7, A-22, F-2, F-19           |
| LVS04968        | H-5             | LVS08496        | F-19                                | LVS08684 | A-22, F-19                     |
| LVS04973        | H-5             | LVS08497        | A-21, F-19                          | LVS08686 | A-7, A-22, F-2, F-4, F-19      |
| LVS04974        | H-5             | LVS08498        | F-19                                | LVS08687 | F-2, F-4, F-19                 |
| LVS04976        | H-5             | LVS08513        | F-2, F-14                           | LVS08688 | F-19                           |
| LVS04978        | H-5             | LVS08514        | F-14                                | LVS08693 | F-19                           |
| LVS04983        | H-5             | LVS08516        | F-3, F-4, F-14                      | LVS08694 | A-22, F-19                     |
| LVS04984        | H-5             | LVS08518        | F-3, F-4, F-14                      | LVS08696 | F-19                           |
| LVS04986        | H-5             | LVS08523        | F-17                                | LVS08697 | A-22, F-19                     |
| LVS04988        | H-5             | LVS08524        | F-17                                | LVS08698 | F-19                           |
| <b>LVS07...</b> |                 | LVS08526        | F-4, F-17                           | LVS08700 | A-22, F-21                     |
| LVS07051        | G-12            | LVS08528        | F-4, F-17                           | LVS08701 | A-22, F-21                     |
| LVS07052        | G-12            | LVS08534        | F-14                                | LVS08702 | A-22, F-21                     |
| LVS07053        | G-12            | LVS08536        | F-2, F-4, F-14                      | LVS08703 | A-22, F-21                     |
| LVS07931        | A-21, F-29      | LVS08538        | F-2, F-4, F-14                      | LVS08704 | A-22, F-21                     |
| LVS07932        | A-21, F-29      | LVS08544        | F-17                                | LVS08706 | F-20, J-13                     |
| LVS07933        | A-21, F-29      | LVS08546        | F-4, F-17                           | LVS08710 | A-22, F-20                     |
| LVS07938        | A-21, F-29      | LVS08548        | F-4, F-17                           | LVS08711 | F-15                           |
| LVS07940        | A-21, F-29      | LVS08560        | A-7, A-21, E-8, F-5, F-22           | LVS08714 | A-7, A-22, F-20, J-13          |
| LVS07941        | A-21, F-29      | LVS08562        | E-8, E-9                            | LVS08716 | A-7, A-22, F-20, J-13          |
| LVS07942        | A-21, F-29      | LVS08562        | A-7, A-21, F-5, F-22                | LVS08717 | F-4, F-6                       |
| LVS07943        | A-21, F-29      | LVS08564        | A-7, A-21, F-5, F-22                | LVS08718 | F-6                            |
| LVS07944        | A-21, F-29      | LVS08566        | A-7, A-21, F-2, F-3, F-4, F-5, F-22 | LVS08719 | F-3, F-4, F-6                  |
| LVS07945        | A-21, F-29      | LVS08574        | F-14                                | LVS08720 | F-19                           |
| LVS07946        | A-21, F-29      | LVS08576        | F-2, F-3, F-14                      | LVS08721 | F-19                           |
| LVS07949        | A-21, F-29      | LVS08578        | F-3                                 | LVS08722 | A-7, A-22, F-20, J-13          |
| LVS07951        | A-21, F-29      | LVS08578        | F-14                                | LVS08723 | A-22, F-19                     |
| LVS07953        | A-21, F-29      |                 |                                     |          |                                |
| LVS07956        | A-21, F-29      |                 |                                     |          |                                |

## Index Of Commercial References

| Com. no.  | Page                              | Com. no.     | Page       | Com. no.     | Page                               |
|-----------|-----------------------------------|--------------|------------|--------------|------------------------------------|
| LVS08724  | F-19                              | LVS08917     | A-23, F-22 | 21507        | G-33                               |
| LVS08726  | F-19                              | LVS08918     | A-23, F-22 | <b>29...</b> |                                    |
| LVS08728  | F-19                              | LVS08921     | F-6        | 29504        | I-46                               |
| LVS08733  | F-2, F-14                         | LVS08961     | A-23, F-22 | 29505        | I-46                               |
| LVS08734  | F-14                              | LVS08963     | A-23, F-22 | 29506        | I-46                               |
| LVS08736  | F-2, F-14                         | LVS08964     | F-35       | 29507        | I-46                               |
| LVS08738  | F-2, F-14                         | LVS08965     | F-35       | <b>31...</b> |                                    |
| LVS08748  | E-59                              | <b>10...</b> |            | 31073        | E-52                               |
| LVS08749  | E-59                              | 10387        | G-35       | 31074        | E-52                               |
| LVS08750  | I-8                               | 10388        | G-35       | 31140        | E-53                               |
| LVS08750D | F-15                              | 10389        | G-35       | 31141        | E-53                               |
| LVS08751D | F-2, F-3, F-15                    | 10390        | G-35       | 31142        | E-53                               |
| LVS08752D | F-15                              | 10391        | G-35       | 31143        | E-53                               |
| LVS08753  | F-3, F-4, F-15                    | 10392        | G-35       | 31144        | E-53                               |
| LVS08755  | A-7, A-22, F-20, I-8              | 10393        | G-35       | 31145        | E-53                               |
| LVS08755D | F-18                              | 10394        | G-35       | 31146        | E-53                               |
| LVS08756  | F-18                              | 10395        | G-35       | 31147        | E-53                               |
| LVS08756D | F-18                              | 10396        | G-35       | 31148        | E-53                               |
| LVS08757D | A-7, A-22, F-18, F-20             | 10397        | G-35       | 31149        | E-53                               |
| LVS08760  | I-8                               | 10398        | G-35       | 31150        | E-53                               |
| LVS08760D | F-15                              | 10399        | G-35       | 31151        | E-53                               |
| LVS08761D | F-2, F-15                         | 10405        | G-33, G-35 | 31152        | E-53                               |
| LVS08762D | F-4, F-15                         | 10545        | G-33       | 31153        | E-53                               |
| LVS08763  | F-4, F-18                         | 10546        | G-33       | 31154        | E-53                               |
| LVS08765  | A-7, A-23, F-20, I-8              | 10547        | G-33       | 31155        | E-53                               |
| LVS08765D | A-7, A-23, F-18, F-20             | <b>13...</b> |            | 31301        | E-39                               |
| LVS08766D | A-7, A-23, F-18, F-20             | 13735        | A-23, F-22 | 31302        | E-39                               |
| LVS08767D | A-7, A-23, F-4, F-18, F-20        | 13736        | A-23, F-22 | <b>32...</b> |                                    |
| LVS08773  | A-23, F-20, F-28                  | <b>14...</b> |            | 32504        | I-46                               |
| LVS08774  | A-7, A-23, E-13, F-20, F-28       | 14811        | G-30       | 32505        | I-46                               |
| LVS08776  | A-23, F-28                        | 14812        | G-30       | 32506        | I-46                               |
| LVS08778  | A-23, F-28                        | 14813        | G-30       | 32507        | I-46                               |
| LVS08783  | A-23, F-28                        | 14814        | G-30       | <b>33...</b> |                                    |
| LVS08794  | A-7, A-23, E-13, E-19, F-26, F-28 | 14818        | G-30       | 33596        | E-15, E-17, E-19                   |
| LVS08796  | E-13, E-19                        | 14885        | G-30       | 33597        | E-15, E-17, E-19                   |
| LVS08796  | A-7, A-23, F-28                   | <b>19...</b> |            | 33628        | E-49                               |
| LVS08900  | A-23, F-22                        | 19512        | G-33       | 33629        | E-49                               |
| LVS08903  | A-23, F-22                        | 19516        | G-33       | 33642        | E-10, E-13, E-15, E-19, I-47, I-48 |
| LVS08904  | A-23, F-22                        | <b>21...</b> |            | 33644        | I-47, I-48                         |
| LVS08905  | A-23, F-22                        | 21089        | G-33       | 33643        | E-10, E-15, E-19, I-46, I-48       |
| LVS08906  | A-23, F-22                        | 21093        | G-33       | 33645        | I-47, I-48                         |
| LVS08910  | A-23, F-22, F-29                  | 21094        | G-33       | 33644        | E-10, E-13, E-15, E-19, E-39       |
| LVS08911  | A-23, F-22, F-29                  | 21095        | G-33       | 33645        | E-10, E-15, E-19, E-39             |
| LVS08913  | A-23, F-22                        | 21096        | G-33       | 33890        | E-49                               |
| LVS08914  | A-23, F-22                        | 21098        | G-33       | 33975        | E-14, E-39                         |
| LVS08915  | A-23, F-22                        | 21501        | G-33       |              |                                    |
| LVS08916  | A-23, F-22                        | 21503        | G-33       |              |                                    |
|           |                                   | 21505        | G-33       |              |                                    |

## Index Of Commercial References

| Com. no.     | Page             | Com. no.    | Page       | Com. no. | Page                                                                                           |
|--------------|------------------|-------------|------------|----------|------------------------------------------------------------------------------------------------|
| 33976        | E-14, E-39       | A9XPH557    | G-31       | LV426912 | E-35, E-36                                                                                     |
| <b>47...</b> |                  | A9XPM212    | G-32       | LV426913 | E-35, E-36                                                                                     |
| 47335        | E-10, E-11, E-13 | A9XPM412    | G-32       | LV429235 | E-20, E-21, E-31, E-32, E-40                                                                   |
| 47336        | E-10, E-11       | A9XPM512    | G-32       | LV429235 | E-22, E-23, E-24, E-29, E-30, E-33, E-34                                                       |
| <b>49...</b> |                  | A9XPT920    | G-31, G-32 | LV429236 | E-20, E-21, E-22, E-23, E-24, E-29, E-30, E-31, E-32, E-33, E-34, E-40                         |
| 49860        | E-57             | <b>D...</b> |            | LV429284 | E-24, E-29                                                                                     |
| 49861        | E-57             | DZ5CA005    | G-43       | LV429285 | E-22, E-23, E-24, E-27, E-28, E-29, E-34                                                       |
| 49862        | E-57             | DZ5CA007    | G-43       | LV429284 | E-29                                                                                           |
| 49863        | E-57             | DZ5CA010    | G-43       | LV432534 | E-29                                                                                           |
| 49865        | E-57             | DZ5CA015    | G-43       | LV429285 | E-27, E-28, E-33, E-34                                                                         |
| 87648        | F-27             | DZ5CA025    | G-43       | LV429286 | E-24                                                                                           |
| <b>A...</b>  |                  | DZ5CA042    | G-43       | LV429306 | E-21, E-23, E-24, E-29, E-30, E-32, E-34                                                       |
| A9N21035     | G-34             | DZ5CA062    | G-43       | LV429306 | E-23, E-24, E-29, E-30, E-32, E-34                                                             |
| A9N21036     | G-34             | DZ5CA102    | G-43       | LV429307 | E-21, E-23, E-24, E-29, E-30, E-32, E-34                                                       |
| A9N21037     | G-34             | DZ5CA162    | G-43       | LV429316 | E-27, E-28, E-33, E-34                                                                         |
| A9N21038     | G-34             | DZ5CA253    | G-43       | LV429358 | E-50, E-51                                                                                     |
| A9N21039     | G-34             | DZ5CA352    | G-43       | LV429359 | E-50, E-51, E-52, E-53                                                                         |
| A9N21040     | G-34             | DZ5CA502    | G-43       | LV429369 | E-50                                                                                           |
| A9N21041     | G-34             | DZ5CE005    | G-43       | LV429515 | E-20, E-21, E-22, E-23, E-24, E-29, E-30, E-31, E-32, E-33, E-34, E-50, E-51                   |
| A9N21042     | G-34             | DZ5CE007    | G-43       | LV429516 | E-20, E-21, E-22, E-23, E-24, E-29, E-30, E-31, E-32, E-33, E-34, E-50, E-51                   |
| A9N21050     | G-34             | DZ5CE010    | G-43       | LV429516 | E-23, E-31, E-32                                                                               |
| A9XAH157     | G-31             | DZ5CE015    | G-43       | LV429517 | E-20, E-21, E-22, E-23, E-24, E-29, E-30, E-31, E-32, E-33, E-34, E-50, E-51                   |
| A9XAH257     | G-31             | DZ5CE025    | G-43       | LV429518 | E-20, E-21, E-22, E-23, E-24, E-29, E-30, E-31, E-32, E-33, E-34, E-40, E-50, E-51, E-52, E-53 |
| A9XAH357     | G-31             | DZ5CE042    | G-43       | LV432475 | E-20, E-21, E-25, E-26, E-40                                                                   |
| A9XAH457     | G-31             | DZ5CE062    | G-43       | LV432475 | E-22, E-23, E-24, E-27, E-28, E-29, E-30                                                       |
| A9XAH557     | G-31             | DZ5CE102    | G-43       | LV432476 | E-20, E-21, E-22, E-23, E-24, E-25, E-26, E-27, E-28, E-29, E-30, E-40                         |
| A9XAH657     | G-31             | DZ5CE162    | G-43       |          |                                                                                                |
| A9XPCD04     | G-31, G-32       | DZ5CE252    | G-43       |          |                                                                                                |
| A9XPCM04     | G-31, G-32       | DZ5CE352    | G-43       |          |                                                                                                |
| A9XPE110     | G-31             | DZ5CE502    | G-43       |          |                                                                                                |
| A9XPE210     | G-31             | <b>G...</b> |            |          |                                                                                                |
| A9XPE310     | G-31             | GS1AP33     | E-58       |          |                                                                                                |
| A9XPE410     | G-31             | GS1AP34     | E-58       |          |                                                                                                |
| A9XPH106     | G-31             | GS1AP43     | E-58       |          |                                                                                                |
| A9XPH112     | G-31             | GS1AP44     | E-58       |          |                                                                                                |
| A9XPH124     | G-31             | <b>L...</b> |            |          |                                                                                                |
| A9XPH157     | G-31             | LGY4193     | G-9        |          |                                                                                                |
| A9XPH212     | G-31             | LGY4230     | G-37       |          |                                                                                                |
| A9XPH224     | G-31             | LGY4231     | G-37       |          |                                                                                                |
| A9XPH257     | G-31             | LGY112510   | G-28       |          |                                                                                                |
| A9XPH312     | G-31             | LGY116013   | G-28       |          |                                                                                                |
| A9XPH324     | G-31             | LGY125014   | G-28       |          |                                                                                                |
| A9XPH357     | G-31             | LGY410028   | G-28       |          |                                                                                                |
| A9XPH412     | G-31             | LGY412548   | G-28       |          |                                                                                                |
| A9XPH424     | G-31             | LGY412560   | G-28       |          |                                                                                                |
| A9XPH457     | G-31             | LGY416048   | G-28       |          |                                                                                                |
| A9XPH512     | G-31             | LGYN1007    | G-28       |          |                                                                                                |
| A9XPH518     | G-31             | LGYN12512   | G-28       |          |                                                                                                |
| A9XPH524     | G-31             | LGYN12515   | G-28       |          |                                                                                                |

## Index Of Commercial References

| Com. no. | Page                                                                                                          | Com. no.            | Page             | Com. no.     | Page |
|----------|---------------------------------------------------------------------------------------------------------------|---------------------|------------------|--------------|------|
| LV432516 | E-40                                                                                                          | NSYCAF223T          | F-30             | NSYTRAB51100 | G-42 |
| LV432534 | E-24, E-29                                                                                                    | NSYCAF228R          | E-59             | NSYTRAB61100 | G-42 |
| LV432534 | E-30                                                                                                          | NSYCAF291           | F-30             | NSYTRABF510  | G-42 |
| LV432584 | E-21, E-23, E-24,<br>E-28, E-29, E-30                                                                         | NSYCAF291T          | F-30             | NSYTRABF520  | G-42 |
| LV432584 | E-23, E-24, E-26,<br>E-29                                                                                     | NSYCAG92LPF         | F-30             | NSYTRABF530  | G-42 |
| LV432585 | E-21, E-23, E-24,<br>E-26, E-28, E-29,<br>E-30                                                                | NSYCAG125LPF        | F-30             | NSYTRABF540  | G-42 |
| LV432591 | E-20, E-21, E-23,<br>E-24, E-25, E-26,<br>E-27, E-28, E-29,<br>E-30, E-50, E-51                               | NSYCAG223LPF        | F-30             | NSYTRABF550  | G-42 |
| LV432591 | E-22, E-25                                                                                                    | NSYCAG291LPF        | E-59, F-30       | NSYTRAC22    | G-42 |
| LV432592 | E-20, E-21, E-22,<br>E-23, E-24, E-25,<br>E-26, E-27, E-28,<br>E-29, E-30, E-40,<br>E-50, E-51                | NSYCAP125LE         | F-30             | NSYTRAC22BL  | G-42 |
| LV432592 | E-25, E-26                                                                                                    | NSYCAP223LE         | F-30             | NSYTRAC23    | G-42 |
| LV432593 | E-20, E-21, E-22,<br>E-23, E-24, E-25,<br>E-26, E-27, E-28,<br>E-29, E-30, E-50,<br>E-51                      | NSYCAP291LE         | F-30             | NSYTRAC24    | G-42 |
| LV432594 | E-20, E-21, E-22,<br>E-23, E-24, E-25,<br>E-26, E-27, E-28,<br>E-29, E-30, E-40,<br>E-50, E-51, E-52,<br>E-53 | NSYCCASTE           | F-34             | NSYTRACE24   | G-42 |
| LV432594 | E-20                                                                                                          | NSY<br>CCOHY230VID  | F-34             | NSYTRACE26   | G-42 |
| LV432595 | E-50, E-51                                                                                                    | NSY<br>CCOHT230VID  | F-34             | NSYTRACP43   | G-42 |
| LV432596 | E-50, E-51                                                                                                    | NSY<br>CCOTH230VID  | F-34             | NSYTRACPE26  | G-42 |
| LV432619 | E-50, E-51                                                                                                    | NSYCCOTHD           | F-34             | NSYTRACR22   | G-42 |
| LV432620 | E-50, E-51, E-52,<br>E-53                                                                                     | NSYCCOTHI           | F-34             | NSYTRACR22BL | G-42 |
| LV432621 | E-50                                                                                                          | NSYCR10WU2          | F-33             | NSYTRACR23   | G-42 |
| LV480756 | E-57                                                                                                          | NSYCR20WU2          | F-33             | NSYTRACR23BL | G-42 |
| LV480811 | E-57                                                                                                          | NSYCR55WU2          | F-33             | NSYTRACR24   | G-42 |
| LV480812 | E-57                                                                                                          | NSYCR100WU2         | F-33             | NSYTRACR24BL | G-42 |
| LV480813 | E-57                                                                                                          | NSYCR150WU2         | F-33             | NSYTRACR42   | G-42 |
| LV480814 | E-57                                                                                                          | NSY<br>CR250W230VV  | F-33             | NSYTRACR43   | G-42 |
| LV480818 | E-57                                                                                                          | NSY<br>CR400W230VV  | F-33             | NSYTRACRE24  | G-42 |
| LV480819 | E-57                                                                                                          | NSY<br>CRP1W230VTVC | F-33             | NSYTRACRE26  | G-42 |
| LV480824 | E-57                                                                                                          | NSY<br>CVF38M230PF  | F-30             | NSYTRAL22    | G-42 |
| LV480827 | E-57                                                                                                          | NSY<br>CVF85M230PF  | F-30             | NSYTRAL23    | G-42 |
| LV480831 | E-57                                                                                                          | NSY<br>CVF165M230PF | F-30             | NSYTRAL24    | G-42 |
| LV480834 | E-56                                                                                                          | NSY<br>CVF300M230PF | F-30             | NSYTRAL25    | G-42 |
| LV480868 | E-56                                                                                                          | NSY<br>CVF560M230PF | F-30, F-31       | NSYTRAL42    | G-42 |
| LV480869 | E-56                                                                                                          | NSY<br>CVF575M230MB | E-59, F-32       | NSYTRAL43    | G-42 |
| LV480870 | E-56                                                                                                          | NSY<br>CVF850M230PF | E-59, F-30, F-31 | NSYTRAL44    | G-42 |
|          |                                                                                                               | NSYTRAB560          | G-42             | NSYTRAL45    | G-42 |
|          |                                                                                                               | NSYTRAB570          | G-42             | NSYTRAL210   | G-42 |
|          |                                                                                                               | NSYTRAB580          | G-42             | NSYTRAL210BL | G-42 |
|          |                                                                                                               | NSYTRAB590          | G-42             | NSYTRAL210GR | G-42 |
|          |                                                                                                               | NSYTRAB610          | G-42             | NSYTRAL220   | G-42 |
|          |                                                                                                               | NSYTRAB620          | G-42             | NSYTRAL410   | G-42 |
|          |                                                                                                               | NSYTRAB630          | G-42             | NSYTRAL410BL | G-42 |
|          |                                                                                                               | NSYTRAB640          | G-42             | NSYTRAL410GR | G-42 |
|          |                                                                                                               | NSYTRAB690          | G-42             | NSYTRAL420   | G-42 |
|          |                                                                                                               | NSYTRAB5100         | G-42             | NSYTRP22     | G-42 |
|          |                                                                                                               | NSYTRAB6100         | G-42             | NSYTRP22AR   | G-42 |
|          |                                                                                                               |                     |                  | NSYTRP22BL   | G-42 |
|          |                                                                                                               |                     |                  | NSYTRP23     | G-42 |
|          |                                                                                                               |                     |                  | NSYTRP23AR   | G-42 |
|          |                                                                                                               |                     |                  | NSYTRP23BL   | G-42 |
|          |                                                                                                               |                     |                  | NSYTRP24     | G-42 |
|          |                                                                                                               |                     |                  | NSYTRP24BL   | G-42 |
|          |                                                                                                               |                     |                  | NSYTRP24D    | G-42 |
|          |                                                                                                               |                     |                  | NSYTRP24DBL  | G-42 |



## Index Of Commercial References

| Com. no.     | Page | Com. no.    | Page |
|--------------|------|-------------|------|
| NSYTRP26T    | G-42 | NSYTRV42BL  | G-42 |
| NSYTRP26TBL  | G-42 | NSYTRV42M   | G-42 |
| NSYTRP42     | G-42 | NSYTRV42MBL | G-42 |
| NSYTRP42BL   | G-42 | NSYTRV43    | G-42 |
| NSYTRP43     | G-42 | NSYTRV43BL  | G-42 |
| NSYTRP43BL   | G-42 | NSYTRV44    | G-42 |
| NSYTRppp     | G-42 |             |      |
| NSYTRR22     | G-42 | <b>R...</b> |      |
| NSYTRR22AR   | G-42 | R9XE110     | G-36 |
| NSYTRR22BL   | G-42 | R9XE210     | G-36 |
| NSYTRR22M    | G-42 | R9XE310     | G-36 |
| NSYTRR22MBL  | G-42 | R9XE410     | G-36 |
| NSYTRR22MF   | G-42 | R9XFC04     | G-36 |
| NSYTRR22MFBL | G-42 | R9XFH112    | G-36 |
| NSYTRR22MFF  | G-42 | R9XFH118    | G-36 |
| NSYTRR22MP   | G-42 | R9XFH157    | G-36 |
| NSYTRR22MPBL | G-42 | R9XFH212    | G-36 |
| NSYTRR23     | G-42 | R9XFH218    | G-36 |
| NSYTRR23AR   | G-42 | R9XFH257    | G-36 |
| NSYTRR23BL   | G-42 | R9XFH312    | G-36 |
| NSYTRR24     | G-42 | R9XFH318    | G-36 |
| NSYTRR24BL   | G-42 | R9XFH357    | G-36 |
| NSYTRR24D    | G-42 | R9XFH412    | G-36 |
| NSYTRR24DBL  | G-42 | R9XFH418    | G-36 |
| NSYTRR24M    | G-42 | R9XFH457    | G-36 |
| NSYTRR24MBL  | G-42 | R9XFH518    | G-36 |
| NSYTRR24MP   | G-42 | R9XFH518G   | G-36 |
| NSYTRR24MPBL | G-42 | R9XFH557    | G-36 |
| NSYTRR26T    | G-42 | R9XT20      | G-36 |
| NSYTRR26TBL  | G-42 |             |      |
| NSYTRR42     | G-42 | <b>S...</b> |      |
| NSYTRR42AR   | G-42 | SMT10015    | I-8  |
| NSYTRR42BL   | G-42 | SMT10016    | I-8  |
| NSYTRR43     | G-42 | SMT10019    | I-8  |
| NSYTRR43BL   | G-42 |             |      |
| NSYTRV22     | G-42 | <b>X...</b> |      |
| NSYTRV22AR   | G-42 | XB5PRJ45    | G-37 |
| NSYTRV22BL   | G-42 | XB5PUSB3    | G-37 |
| NSYTRV22M    | G-42 |             |      |
| NSYTRV22MBL  | G-42 | <b>Z...</b> |      |
| NSYTRV23     | G-42 | ZBSP1       | G-37 |
| NSYTRV23BL   | G-42 | ZBSP2       | G-37 |
| NSYTRV24     | G-42 | ZBSP3       | G-37 |
| NSYTRV24BL   | G-42 |             |      |
| NSYTRV24D    | G-42 |             |      |
| NSYTRV24DBL  | G-42 |             |      |
| NSYTRV26T    | G-42 |             |      |
| NSYTRV26TBL  | G-42 |             |      |
| NSYTRV42     | G-42 |             |      |
| NSYTRV42AR   | G-42 |             |      |

## Index Of Commercial References With Description

| Com. no.        | Description                              | Page       | Com. no. | Description                                                 | Page                                          |
|-----------------|------------------------------------------|------------|----------|-------------------------------------------------------------|-----------------------------------------------|
| <b>LVS01...</b> |                                          |            | LVS03196 | 4 hexagonal spacers M6 H23                                  | A-12, F-24                                    |
| LVS01005        | 10 black line L900 stickers              | A-12, F-22 | LVS03197 | 4 hexagonal spacers M6 H55                                  | A-12, F-24                                    |
| LVS01006        | 10 black arrow out. Stickers             | A-12, F-22 | LVS03198 | 4 hexagonal spacers M6 H25                                  | A-12, F-24                                    |
| LVS01007        | 10 black arrow inc. stickers             | A-12, F-22 | LVS03199 | 4 hexagonal spacers M8 H40+10                               | A-12, F-24                                    |
| LVS01008        | 10 black transformer stickers            | A-12, F-22 | LVS03202 | Modular front plate W600/W650 2m                            | E-66                                          |
| LVS01094        | 1/4 T locking front plate (2 by 10)      | I-5        | LVS03203 | Modular front plate W600/W650 3m                            | E-60, E-61, E-66                              |
| LVS01100        | Side panel access.Syst.P                 | I-6        | LVS03204 | Modular front plate W600/W650 4m                            | E-61, E-62                                    |
| LVS01101        | IP55 back access.Syst.P                  | I-5        | LVS03205 | Modular front plate W600/W650 5m                            | E-36, E-37, E-60, E-62                        |
| LVS01102        | IP55 side panel access Syst.P            | I-6        | LVS03206 | Front Plate, Transfer Pact, 3P/4P, 63A, Vertical, W650, 6M  | E-54                                          |
| LVS01103        | IP55 roof access. Syst.P                 | I-6        | LVS03207 | Front Plate, Transfer Pact, 3P/4P, 160A, Vertical, W650, 8M | E-55                                          |
| LVS01104        | Framework access.Syst.P                  | I-4        | LVS03213 | Modular front plate W300 3m                                 | E-61                                          |
| LVS01105        | IP30/55 door access.Syst.P               | I-7        | LVS03214 | Modular front plate W300 4m                                 | E-61, E-62                                    |
| LVS01106        | Back panel access.Syst.P                 | I-5        | LVS03220 | Blanking strip L1000                                        | A-4, A-12, E-36, E-37, E-61, E-62, E-66, F-22 |
| LVS01109        | 12 Linergy LGY busbar stops              | G-4, G-7   | LVS03221 | 4 divisible blanking plates W90                             | A-4, A-12, E-36, E-37, E-61, E-62, E-66, F-22 |
| LVS01110        | W150 plain wicket door                   | I-5        | LVS03222 | NSX blanking plate electronic trip unit                     | A-4, A-12, E-31, E-32, E-33, E-34, F-22       |
| LVS01112        | Roof access. Syst.P                      | I-6        | LVS03223 | Front plate 3 modular rows W600/W650 8m                     | E-61                                          |
| LVS01120        | Frame bot. Cross-member L650             | I-7        | LVS03225 | Front plate NSXm vert. Rotative W400 5m                     | E-38                                          |
| LVS01121        | Frame bot. Cross-member L150+650         | I-7        | LVS03226 | Front plate NSXm -3P vert.Rot.W650 5m                       | E-36                                          |
| LVS01123        | Fr.PI.Sup. Striker kit Syst.P            | I-6        | LVS03227 | Front plate NSXm -4P vert.Rot.W650 5m                       | E-36                                          |
| LVS01124        | locking kit for IP31/IP55 door (Ipc Arc) | I-7        | LVS03235 | Fr.PI.changeover INS-INV250 rot W600 5m                     | E-52                                          |
| LVS01126        | Green Cover W400 P for Wireless PaS      | I-8        | LVS03241 | Fr.PI.3-4 Vigi NSX/CVS250 v.fix.tog. 7m                     | E-31, E-32                                    |
| LVS01127        | Green Cover W650 P for Wireless PaS      | I-8        | LVS03243 | Fr.PI.3-4 NSX/CVS250 v.fixed tog/rot 5m                     | E-29, E-31, E-32, E-33, E-34                  |
| LVS01128        | Green Cover W800 P for Wireless PaS      | I-8        | LVS03244 | Fr.PI.3-4Vigi NSX/CVS250 v.rot/tl/plug 7m                   | E-29, E-33, E-34                              |
| LVS01130        | Linergy LGYE busbar screw plate kit      | G-13, I-4  | LVS03245 | Fr.PI. changeover NSX250 v.rot. W600 5m                     | E-50                                          |
| LVS01198        | Ph/PrismaSeT Plus IP55 cub.Assoc.        | I-6        | LVS03247 | Front plate changeover INS250 W600 5m                       | E-53                                          |
| LVS01199        | PrismaSeT/PrismaSeT Plus cub.Assoc.      | I-6        | LVS03248 | Front plate INS250 vertical W600/W650 5m                    | E-40                                          |
| LVS01201        | 2 IPXXB clip-on covers Linergy BW        | G-14, I-4  | LVS03249 | Blanking plate NSX/CVS250-EZC100 v. W147                    | A-4, A-12, E-31, E-32, E-33, E-34, F-22       |
| LVS01202        | 4 IPXXB covers Linergy FM 200            | G-27, I-4  | LVS03253 | Fr.PI. NSX/CVS 250 v.fix.tog/rot W300 9m                    | E-30                                          |
| LVS01210        | Linergy BW accessories 160-400A          | G-14, I-4  | LVS03274 | Front plate INS630 vertic. W600/W650 10m                    | E-40                                          |
| LVS01211        | Linergy BW accessories 630A              | G-14       | LVS03275 | Fr.PI.NSX/CVS630 v.tog/rot/plug W600 9m                     | E-25, E-26, E-27, E-28, E-29                  |
| LVS01215        | Cables membrane 70 x 40 (*5)             | A-12, F-27 | LVS03283 | Fr.Pl.ate NSX/CVS 630 v.fix.rot. W300 12m                   | E-30                                          |
| LVS01219        | Rotative Handle With Rod                 | I-7        | LVS03293 | Front plate Vigi NSX250 v.tog. W300 11m                     | E-30                                          |
| LVS01224        | IP30 reinforced plain door IK10 W650     | F-14       | LVS03297 | Fr.PI.Vigi NSX/CVS630 v.tog/rot W600 9m                     | E-25, E-26, E-27, E-28, E-29                  |
| LVS01225        | IP30 reinforced plain door IK10 W800     | F-14       | LVS03299 | Front pl.Vigi NSX630 v.fix.tog.W300 10m                     | E-30                                          |
| <b>LVS03...</b> |                                          |            | LVS03308 | FRONT PL. GS32 3P/4P W600 HZ/VT 3M                          | E-58                                          |
| LVS03030        | M.PI. Nsx/Cvs/Ins 250 Hz.fixed Toggle    | F-25       |          |                                                             |                                               |
| LVS03050        | M.PI. NSX/CVS/Vigi/INS 250 v. fix.toggle | E-30       |          |                                                             |                                               |
| LVS03051        | M.PI.NSX/CVS/INS 250 v. fixed rot.handle | E-30       |          |                                                             |                                               |
| LVS03152        | M.Pl.ate for 2 3P-meters                 | E-63       |          |                                                             |                                               |
| LVS03164        | 20 M4 clip-nuts mod.dev.rails            | A-12, F-24 |          |                                                             |                                               |
| LVS03165        | 20 M5 clip-nuts mod.dev.rails            | A-12, F-24 |          |                                                             |                                               |
| LVS03166        | 20 M6 clip-nuts mod.dev.rails            | A-12, F-24 |          |                                                             |                                               |
| LVS03180        | 20 slotted m.PI. M4 clip-nuts            | A-12, F-24 |          |                                                             |                                               |
| LVS03181        | 20 slotted m.PI. M5 clip-nuts            | A-12, F-24 |          |                                                             |                                               |
| LVS03182        | 20 slotted m.PI. M6 clip-nuts            | A-12, F-24 |          |                                                             |                                               |
| LVS03185        | 4 hexagonal spacers M5 H9                | A-12, F-24 |          |                                                             |                                               |
| LVS03186        | 4 hexagonal spacers M5 H23               | A-12, F-24 |          |                                                             |                                               |
| LVS03187        | 4 hexagonal spacers M5 H55               | A-12, F-24 |          |                                                             |                                               |
| LVS03194        | 20 hexa.Spacer M6 captive nuts           | A-12, F-24 |          |                                                             |                                               |
| LVS03195        | 4 hexagonal spacers M6 H9                | A-12, F-24 |          |                                                             |                                               |

## Index Of Commercial References With Description

| Com. no. | Description                                       | Page                                           | Com. no. | Description                                               | Page                                            |
|----------|---------------------------------------------------|------------------------------------------------|----------|-----------------------------------------------------------|-------------------------------------------------|
| LVS03309 | FRONT PL. GS63-160 3P/4P W600 HZ/VT 5M            | E-58                                           | LVS03424 | Mounting Plate, Transfer Pact, 3P/4P, 63A, Vertical W650  | E-54                                            |
| LVS03320 | Front plate ISFT 100 vertic W600/W650 6m          | E-57                                           | LVS03425 | Mounting Plate, Transfer Pact, 3P/4P, 160A, Vertical W650 | E-55                                            |
| LVS03321 | Front plate ISFT 160 vertic W600/W650 6m          | E-57                                           | LVS03428 | Mount.PI changeover NSX/INS 250 rot.Vert                  | E-50, E-52, E-53                                |
| LVS03322 | Front plate ISFT 250 vertical W650 9m             | E-57                                           | LVS03451 | Mount.PI NSX/CVS.Toggle -3P 630A hz W650                  | E-20                                            |
| LVS03323 | Front plate ISFT 400 vertical W650 9m             | E-57                                           | LVS03452 | Mount.PI NSX/CVS.Toggle -4P 630A hz W650                  | E-20, E-40                                      |
| LVS03324 | Front plate ISFT 630 vertical W650 8m             | E-57                                           | LVS03453 | Mount.PI NSX/CVS plugin -3P 630A hz W650                  | E-21, E-22, E-23                                |
| LVS03325 | Front plate ISFT100N vertical W600/650 8m         | E-57                                           | LVS03454 | Mount.PI NSX/CVS plugin -4P 630A hz W650                  | E-21, E-22, E-23                                |
| LVS03330 | Fr. plate NSXm/Vigi/SDX hz.Tog. W600 3m           | E-35                                           | LVS03457 | Mount.PI changeover NSX/INS 630 mot. Horz                 | E-51                                            |
| LVS03331 | Fr. plate NSXm hz.Rot.W600 3m                     | E-35                                           | LVS03458 | Mount.PI changeover NSX/INS 630 rot. Horz                 | E-50, E-52, E-53                                |
| LVS03342 | Transparent front plate W600/W650 4m              | A-4, A-13, E-60, E-66, F-23                    | LVS03460 | Kit For Control Support                                   | E-22                                            |
| LVS03343 | Transparent front plate W600/W650 6m              | A-4, A-13, E-63, F-23                          | LVS03461 | Mount.PI 2 NSX/CVS/INS -3P/4P 630A vert.                  | E-25, E-26, E-27, E-28, E-29, E-40              |
| LVS03344 | Transparent front plate W600/W650 9m              | A-4, A-13, E-63, F-23                          | LVS03462 | Mount.PI NSX withd -3/4P 630A hz W650                     | E-24                                            |
| LVS03345 | Transparent front plate W600/W650 12m             | A-13, F-23                                     | LVS03480 | Mount.PI NS fixed -3P/4P 1000A hz.W650                    | E-17                                            |
| LVS03346 | FRONT PLATE HORI GS 250A 7M W650                  | E-58                                           | LVS03482 | Mount.PI NS fixed -3P/4P 1600A vert.W650                  | E-15, E-16                                      |
| LVS03347 | FRONT PLATE HORI GS 400A 8M W650                  | E-58                                           | LVS03483 | M.PI NT/NS withd -3P/4P 1600A vert.W650                   | E-10, E-11, E-15, E-16, E-46, E-47, E-48        |
| LVS03349 | FRONT PLATE VERT GS 250-400A 6M W650              | E-58                                           | LVS03484 | Mount.PI NT fixed -3P/4P 1600A vert.W650                  | E-10, E-11, E-46, E-47, E-48                    |
| LVS03352 | Transparent front plate W300 4m                   | A-13, F-23                                     | LVS03487 | Mount.PI NS fixed -3P/4P 1600A vert.W400                  | E-18, E-30                                      |
| LVS03353 | Transparent front plate W300 6m                   | A-13, F-23                                     | LVS03488 | Mount.PI NT/NS withd -3P 1600A vert. W400                 | E-12, E-18                                      |
| LVS03354 | Transparent front plate W300 9m                   | A-13, F-23                                     | LVS03489 | Mount.PI NT fixed -3P 1600A vert.W400                     | E-12                                            |
| LVS03401 | W650 modular device rail PrismaSeT P Active       | A-4, A-13, E-60, E-61, E-62, E-66, F-26        | LVS03491 | Mount.PI changeover NS1000 rot.Horz. W650                 | E-49                                            |
| LVS03402 | W650 adjustable mod. Dev. Rail PrismaSeT          | A-4, A-13, E-37, E-60, E-66, F-26, G-40        | LVS03500 | Mount.PI NW fixed/withd -3P/4P vert.W650                  | E-2, E-4, E-6, E-8, E-9, E-42, E-43, E-44, E-45 |
| LVS03404 | W400 adjustable mod. Dev. Rail PrismaSeT P Active | E-61, E-62, E-66                               | LVS03501 | M.PI NS3200 INS-INV2500 fixed vertical                    | E-14, E-39                                      |
| LVS03405 | Mount.PI NSXm toggle/rot-3P/4P vert. W400         | E-38                                           | LVS03545 | M.PI.100mm b/centres ISFL160                              | E-56                                            |
| LVS03406 | Mount.PI NSXmVigi toggle-3P/4P vert. W650         | E-36                                           | LVS03546 | M.PI.185mm b/centres ISFL630                              | E-56                                            |
| LVS03409 | Mount.PI NSXm toggle/rot-3P/4P horz. W650         | E-35                                           | LVS03553 | M.Plate ISFT 100N                                         | E-57                                            |
| LVS03410 | Mount.PI NSXm toggle/rot-3P/4P vert. W650         | E-36                                           | LVS03554 | M.PI.ISFT100                                              | E-57                                            |
| LVS03411 | Mount.PI NSX/CVS.Toggle -3P 250A hz W650          | E-20                                           | LVS03555 | M.PI busbar ISFT 100N/160                                 | E-57                                            |
| LVS03412 | Mount.PI NSX/CVS.Toggle -4P 250A hz W650          | E-20, E-40                                     | LVS03556 | M.PI.ISFT160                                              | E-57                                            |
| LVS03413 | Mount.PI NSX/CVS plugin -3P 250A hz W650          | E-21, E-22, E-23                               | LVS03557 | M.PI.ISFT630                                              | E-57                                            |
| LVS03414 | Mount.PI NSX/CVS plugin -4P 250A hz W650          | E-21, E-22, E-23                               | LVS03559 | M. PL GS 3P/4P 32A H+V W650                               | E-58                                            |
| LVS03415 | Mount.PI NSX withd -3/4P 250A hz W650             | E-24                                           | LVS03560 | M.PL GS 3P/4P 63-100-160A HORZ W650                       | E-58                                            |
| LVS03416 | Mounting plate for Linergy FC NSXm                | E-36                                           | LVS03561 | Canalis support                                           | E-4, E-11, E-16                                 |
| LVS03417 | M.PI.Hz.NS250 c/o mot. Or ua/ba                   | E-42, E-43, E-44, E-45, E-46, E-47, E-48, E-51 | LVS03563 | M. PL GS 63-160A VERT W650                                | E-58                                            |
| LVS03420 | M.PI.4Vigi/NSX/CVS/ 3INS 250 v.Fix. Toggle        | E-31, E-40                                     | LVS03564 | M. PL GS 250A HORI W650                                   | E-58                                            |
| LVS03421 | M.PI.3-4V.Withd.NS250 devices                     | E-29, E-32                                     | LVS03565 | M. PL GS 250A VERT W650                                   | E-58                                            |
| LVS03422 | M.Plate 4 Vigi NSX/CVS 250 v. Fixed rot/tel       | E-33, E-34                                     | LVS03566 | M. PL GS 400A HORI W650                                   | E-58                                            |
| LVS03423 | M.PI.3-4 V.Withd.NS250 polyp.                     | E-32                                           | LVS03567 | M. PL GS 400A VERT W650                                   | E-58                                            |
|          |                                                   |                                                | LVS03569 | W800 plain backplate 36m                                  | A-14, F-25                                      |

## Index Of Commercial References With Description

| Com. no. | Description                              | Page                                           | Com. no. | Description                     | Page                                                                                                                                         |
|----------|------------------------------------------|------------------------------------------------|----------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| LVS03570 | Plain backplate 36m W650                 | A-14, F-25                                     | LVS03691 | Fr.PI.Withd.NS1600-NT           | E-10, E-11, E-15, E-16, E-46, E-47, E-48                                                                                                     |
| LVS03571 | Slotted mounting plate 4modules          | A-4, A-14, E-60, F-26                          | LVS03692 | Fr.PI.V.Fixed NT                | E-10, E-11, E-46, E-47, E-48                                                                                                                 |
| LVS03572 | Slotted mounting plate 6modules          | A-4, A-14, E-60, F-26                          | LVS03695 | Fr.PI.Hz.NS1600 changeover rot. | E-49                                                                                                                                         |
| LVS03574 | Slotted mounting plate 12m               | A-14, F-26                                     | LVS03697 | Fr.PI.V.Fix.NS1600 3-4P W400    | E-18                                                                                                                                         |
| LVS03580 | 4 Angle brackets + screws                | A-14, F-24                                     | LVS03698 | Fr.PI.V.Fixed NT 3P W400        | E-12                                                                                                                                         |
| LVS03581 | 2 universal angle brackets               | A-4, A-14, F-24, F-26, F-28, G-40              | LVS03699 | Fr.PI.Withd.NS1600-NT 3P W400   | E-12, E-18                                                                                                                                   |
| LVS03582 | 6 Universal inserts Syst.P               | A-14, F-24, F-28                               | LVS03701 | Fr.PI.V.Fixed mot.NS1600 sp     | E-16                                                                                                                                         |
| LVS03583 | 6 universal angle brackets               | A-4, A-14, F-24, H-6                           | LVS03709 | Front plate dedicated NW        | E-8, E-9                                                                                                                                     |
| LVS03584 | 2 Side.Cross-members W400 D400           | A-4, A-14, E-7, F-20, F-28, G-40               | LVS03710 | Fr.PI.Withdrawable NW           | E-2, E-4, E-6, E-8, E-42, E-43, E-44, E-45                                                                                                   |
| LVS03586 | 2 Side.Cross-members W200 D600           | A-4, A-14, E-7, F-20, F-28                     | LVS03711 | Fr.PI.Fixed NW                  | E-2, E-4, E-6, E-8, E-42, E-43, E-44, E-45                                                                                                   |
| LVS03587 | 2 Longitudinal cross-mbers W650          | A-14, F-20, F-28                               | LVS03713 | Fr.PI.INS1600 3P                | E-39                                                                                                                                         |
| LVS03590 | Rear modular device rail W650            | A-14, F-26                                     | LVS03714 | Fr.PI.INS1600 4P                | E-39                                                                                                                                         |
| LVS03593 | 2 Slide rails+angle brackets             | A-14, F-25, F-26, F-28                         | LVS03715 | Fr.PI.INS2500 3P/4P             | E-39                                                                                                                                         |
| LVS03595 | System G adapter W500                    | A-4, A-14, E-63, F-25, G-15                    | LVS03716 | Fr.PI.NS3200                    | E-14                                                                                                                                         |
| LVS03596 | System G adapter W250                    | A-4, A-14, E-30, F-25                          | LVS03722 | Hinged fr.PI.13M W400           | A-5, A-14, E-12, E-18, F-23                                                                                                                  |
| LVS03604 | Fr.PI.Vigi NSX.Tog/CVS.Rot -3P 250 hz 3m | E-20, E-21, E-22, E-23                         | LVS03723 | Hinged fr.PI.Hsi 13m W400       | E-12, E-18                                                                                                                                   |
| LVS03606 | Fr.PI.Vigi NSX.Tog/CVS.Rot -4P 250 hz 4m | E-20, E-21, E-22, E-23                         | LVS03735 | Ip20 front ISFL 185mm bc W650   | E-56                                                                                                                                         |
| LVS03616 | Fr.PI.Hz.NSX250 c/over mot.              | E-51                                           | LVS03736 | Fr.PI.ISFL 160                  | E-56                                                                                                                                         |
| LVS03617 | Fr.PI.Hz.INS250                          | E-40                                           | LVS03740 | Blanking plate ISFL 160         | E-56                                                                                                                                         |
| LVS03618 | Fr.PI.Hz. Withd. NSX250                  | E-24                                           | LVS03741 | Blanking plate ISFL 630         | E-56                                                                                                                                         |
| LVS03620 | Fr.PI.3-4 V.INS250 devices               | E-40                                           | LVS03801 | Plain front plate W600/W650 1m  | A-5, A-15, D-3, E-10, E-25, E-26, E-27, E-28, E-29, E-31, E-32, E-33, E-34, E-36, E-40, E-47, E-58, E-60, F-23                               |
| LVS03643 | Fr.PI.Vigi NSX.Tog/CVS.Rot -3P 630 hz 3m | E-20, E-21, E-22, E-23                         | LVS03802 | Plain front plate W600/W650 2m  | A-5, A-15, D-3, E-10, E-14, E-15, E-25, E-26, E-27, E-28, E-29, E-31, E-32, E-33, E-34, E-36, E-40, E-46, E-48, E-50, E-52, E-53, E-57, F-23 |
| LVS03644 | Fr.PI.Vigi NSX.Tog/CVS.Rot -4P 630 hz 4m | E-20, E-21, E-22, E-23                         | LVS03803 | Plain front plate W600/W650 3m  | A-5, A-15, D-3, E-10, E-11, E-15, E-16, E-25, E-26, E-27, E-28, E-29, E-31, E-33, E-39, E-46, E-47, E-48, E-50, E-60, F-23, G-40             |
| LVS03656 | Fr.PI.Hz.NSX630 c/over mot.              | E-51                                           |          |                                 |                                                                                                                                              |
| LVS03657 | Fr.PI.Hz. Withd. NSX630                  | E-24                                           |          |                                 |                                                                                                                                              |
| LVS03658 | Fr.PI.Hz.INS630                          | E-40                                           |          |                                 |                                                                                                                                              |
| LVS03659 | Fr.PI.Hz.NSX-INS630 c/over rot           | E-50, E-52                                     |          |                                 |                                                                                                                                              |
| LVS03661 | Fr.PI.Hz.Ns-INS630 changeover            | E-53                                           |          |                                 |                                                                                                                                              |
| LVS03663 | Fr.PI. Vert. 2 NSX630                    | E-25, E-26, E-27, E-28, E-29                   |          |                                 |                                                                                                                                              |
| LVS03666 | Fr.PI.Vertical 2 NSX630 Vigi             | E-25, E-26, E-27, E-28, E-29                   |          |                                 |                                                                                                                                              |
| LVS03671 | Fr.PI.Ua or ba                           | E-42, E-43, E-44, E-45, E-46, E-47, E-48, E-51 |          |                                 |                                                                                                                                              |
| LVS03687 | Fr.PI.Hz.Fix.NS1600 tog/rot.4P           | E-17                                           |          |                                 |                                                                                                                                              |
| LVS03690 | Fr.PI.V.Fixed NS1600                     | E-15                                           |          |                                 |                                                                                                                                              |

## Index Of Commercial References With Description

| Com. no. | Description                               | Page                                                                                                             | Com. no.        | Description                              | Page             |
|----------|-------------------------------------------|------------------------------------------------------------------------------------------------------------------|-----------------|------------------------------------------|------------------|
| LVS03804 | Plain front plate W600/W650 4m            | A-5, A-15, D-3, E-2, E-4, E-8, E-9, E-10, E-14, E-15, E-25, E-27, E-39, E-42, E-44, E-46, E-48, E-60, E-66, F-23 | LVS03932        | Fr.Pl. VigiloHm xm200-300c W600/W650 6m  | E-66             |
| LVS03805 | Plain front plate W600/W650 5m            | A-5, A-15, D-3, E-2, E-4, E-11, E-16, E-25, E-27, E-42, E-43, E-44, E-60, F-23, G-40                             | LVS03970        | Door for capacitors W650                 | E-59             |
| LVS03806 | Plain front plate W600/W650 6m            | A-5, A-15, D-3, E-8, E-11, E-14, E-16, E-42, E-43, E-44, E-45, E-60, E-63, F-23, G-40                            | LVS03979        | Varpluscan horizontal mounting plate     | E-59             |
| LVS03808 | Plain front plate W600/W650 12m           | A-5, A-15, E-6, F-23                                                                                             | <b>LVS04...</b> |                                          |                  |
| LVS03811 | Plain front plate W300 1m                 | A-5, A-15, E-30, E-38, E-62, F-23                                                                                | LVS04004        | Linery FM 4P dist.block 80A              | G-27             |
| LVS03812 | Plain front plate W300 2m                 | A-5, A-15, E-30, E-38, F-23                                                                                      | LVS04008        | Linery FM 4P dist.block 63A 12m 20 holes | G-27             |
| LVS03813 | Plain front plate W300 3m                 | A-15, F-23                                                                                                       | LVS04012        | Linery FM 2P dis.Block 200A 24m 24holes  | G-27             |
| LVS03814 | Plain front plate W300 4m                 | A-5, A-15, E-30, E-66, F-23                                                                                      | LVS04013        | Linery FM 3P dis.Block 200A 24m 42 holes | G-27             |
| LVS03815 | Plain front plate W300 5m                 | A-15, F-23                                                                                                       | LVS04014        | Linery FM 4P dis.Block 200A 24m 54 holes | G-27             |
| LVS03816 | Plain front plate W300 6m                 | A-5, A-15, E-30, F-23                                                                                            | LVS04018        | Linery FM 4P dis.Block 160A 12m 27 holes | G-27             |
| LVS03817 | Plain front plate W300 9m                 | A-15, F-23                                                                                                       | LVS04021        | 4P conn.Lin.BW insul.bb/lin.fm d.blk200A | G-14, G-15, G-27 |
| LVS03891 | IP30 ventilated front plate W600/W650 1m  | F-30                                                                                                             | LVS04024        | 4P conn.Lin.Bs stage bb/lin.Fm d.blk200A | G-27             |
| LVS03895 | IP30 ventilated front plate W600/W650 3m  | F-30                                                                                                             | LVS04026        | Linery FM 4P dis.Block 200A 36m 81 holes | G-27             |
| LVS03900 | Support 72x72 met.dev/pb for 03904/03928  | E-12, E-18, E-65                                                                                                 | LVS04029        | 4 Conn.Lin.Bs rear bb/lin.fm d.blk 200A  | G-27             |
| LVS03901 | Support 96x96 met.dev/pb for 03904/03928  | E-12, E-18, E-65                                                                                                 | LVS04030        | 4 Conn. Ng160/Linery FM dist.blk 160A    | E-35, G-27       |
| LVS03902 | Supp.cut-out 72x72 met.dev/pb 03904/03928 | E-12, E-18, E-65                                                                                                 | LVS04031        | Linery DX 1P dist.Block 160A 4m 6 holes  | E-37, G-24       |
| LVS03903 | Supp.cut-out 96x96met.dev/pb 03904/03928  | E-12, E-18, E-65                                                                                                 | LVS04033        | Linery DP 3P d.blk/ComPacT 250A 27 holes | G-16             |
| LVS03904 | Fr.Pl.72°/96° cut-out met.dev/pb W600 3m  | E-64, E-65                                                                                                       | LVS04034        | Linery DP 4P d.blk/ComPacT250A 36 holes  | G-16             |
| LVS03907 | Support 72x72 met.dev/pb for 03910/03912  | E-65                                                                                                             | LVS04038        | Linery DP/NSXm 3P 160A 18T               | G-17             |
| LVS03908 | Support 96x96 met.dev/pb for 03911/03913  | E-65                                                                                                             | LVS04039        | Linery DP/NSXm 4P 160A 24T               | E-35, E-37       |
| LVS03910 | Fr.pl.72x72 6 Cut-Out Met.dev/Pb W600 3m  | E-64, E-65                                                                                                       | LVS04040        | Linery DX 4P 63A top incoming            | G-24             |
| LVS03911 | Fr.pl.96x96 3 Cut-Out Met.dev/Pb W600 3m  | E-64, E-65, E-66                                                                                                 | LVS04041        | Linery DX 4P 63A bottom incoming         | G-24             |
| LVS03913 | Fr.Pl.96X96 1 cut-out met.dev/pb W600 3m  | E-64, E-65, E-66                                                                                                 | LVS04045        | Linery DX 4P dist.block 125A 6m 52 holes | E-37, G-24       |
| LVS03914 | Fr.Pl. 12 push-button/lamps W600/W650 2m  | E-64, E-65                                                                                                       | LVS04046        | Linery DX 4P d.blk/ng160 160A 6m 52 hole | E-37, G-24       |
| LVS03923 | Fr.Pl. 1 pre cut-out 96x96 W300 3m        | E-65, E-66                                                                                                       | LVS04047        | 4 Conn.Ng125/Linery DX dist.Block 125A   | E-37, G-24       |
| LVS03928 | Visor 30°for metering dev/pb 72x72/96x96  | E-64, E-65                                                                                                       | LVS04052        | Linery BS 4P multistage bb 160A 52holes  | G-11             |
| LVS03930 | Mounting plate VigiloHm xm200-300c        | E-66                                                                                                             | LVS04053        | Linery BS 4P multistage bb 250A 52holes  | G-11             |
|          |                                           |                                                                                                                  | LVS04054        | Linery BS 4P multistage bb 400A 52holes  | G-11             |
|          |                                           |                                                                                                                  | LVS04055        | Linery BS 4P multistage bb 630A 52holes  | G-11             |
|          |                                           |                                                                                                                  | LVS04060        | Power supply blk NSX/CVS/INS/INV 250 4P  | G-15             |
|          |                                           |                                                                                                                  | LVS04061        | Power supply block universal 250A 4P     | G-15             |
|          |                                           |                                                                                                                  | LVS04070        | Power supply blk NSX/CVS/INS-INV 400 4P  | G-15             |
|          |                                           |                                                                                                                  | LVS04071        | Power supply blk NSX/CVS/INS-INV 630 4P  | G-15             |
|          |                                           |                                                                                                                  | LVS04074        | Universal power supply block 400-630A    | G-15             |
|          |                                           |                                                                                                                  | LVS04103        | Linery BW 3P insulated busbar 125A L450  | G-14             |
|          |                                           |                                                                                                                  | LVS04104        | Linery BW 4P insulated busbar 125A L450  | G-14             |
|          |                                           |                                                                                                                  | LVS04107        | Linery BW 3P insulated busbar 125A L750  | G-14             |
|          |                                           |                                                                                                                  | LVS04108        | Linery BW 4P insulated busbar 125A L750  | G-14             |
|          |                                           |                                                                                                                  | LVS04111        | Linery BW 3P insulated b.bar 160A L1000  | G-14             |
|          |                                           |                                                                                                                  | LVS04112        | Linery BW 3P insulated b.bar 250A L1000  | G-14             |
|          |                                           |                                                                                                                  | LVS04113        | Linery BW 3P insulated b.bar 400A L1000  | G-14             |
|          |                                           |                                                                                                                  | LVS04114        | Linery BW 3P insulated b.bar 630A L1000  | G-14             |
|          |                                           |                                                                                                                  | LVS04116        | Linery BW 3P insulated b.bar 160A L1400  | G-14             |
|          |                                           |                                                                                                                  | LVS04117        | Linery BW 3P insulated b.bar 250A L1400  | G-14             |



## Index Of Commercial References With Description

| Com. no. | Description                              | Page                         | Com. no. | Description                                                                               | Page                                      |
|----------|------------------------------------------|------------------------------|----------|-------------------------------------------------------------------------------------------|-------------------------------------------|
| LVS04118 | Linery BW 3P insulated b.bar 400A L1400  | <b>G-14</b>                  | LVS04229 | 20 Tab conn.M10 volt.Tap-offs                                                             | <b>G-13</b>                               |
| LVS04119 | Linery BW 3P insulated b.bar 630A L1400  | <b>G-14</b>                  | LVS04233 | Trunking door L2000                                                                       | <b>A-17, F-27</b>                         |
| LVS04121 | Linery BW 4P insulated b.bar 160A L1000  | <b>G-14</b>                  | LVS04234 | 10 wiring through fr.grommets                                                             | <b>A-17, F-27</b>                         |
| LVS04122 | Linery BW 4P insulated b.bar 250A L1000  | <b>G-14</b>                  | LVS04235 | Wiring to door flex.trunking                                                              | <b>A-17, F-27</b>                         |
| LVS04123 | Linery BW 4P insulated b.bar 400A L1000  | <b>G-14</b>                  | LVS04239 | 12 Hz.cable straps                                                                        | <b>A-17, F-27</b>                         |
| LVS04124 | Linery BW 4P insulated b.bar 400A L1001  | <b>G-14</b>                  | LVS04243 | 4 covers hz.cable straps                                                                  | <b>A-17, F-27</b>                         |
| LVS04126 | Linery BW 4P insulated b.bar 160A L1400  | <b>G-14</b>                  | LVS04255 | 12 Hz.trunking supports                                                                   | <b>A-17, F-27</b>                         |
| LVS04127 | Linery BW 4P insulated b.bar 250A L1400  | <b>G-14</b>                  | LVS04256 | 10 Hz. adjustable trunking sup                                                            | <b>A-17, F-27</b>                         |
| LVS04128 | Linery BW 4P insulated b.bar 400A L1400  | <b>G-14</b>                  | LVS04257 | 4Hz.trunking sections L450+sup                                                            | <b>A-17, F-27</b>                         |
| LVS04129 | Linery BW 4P insulated b.bar 630A L1400  | <b>G-14</b>                  | LVS04262 | 12 Vertical cable straps                                                                  | <b>A-17, F-27</b>                         |
| LVS04130 | Linery BW seismic kit 3 metal supports   | <b>G-15</b>                  | LVS04263 | 2 V.cable straps L1000 covers                                                             | <b>A-17, F-27</b>                         |
| LVS04145 | Cu connections 125A 4P W230              | <b>G-15</b>                  | LVS04267 | Vertical trunking L2000                                                                   | <b>A-17, F-27</b>                         |
| LVS04146 | Cu connections 160A 4P W250              | <b>G-15</b>                  | LVS04403 | Linery FC distribution block for ComPacT NSX250 3P toggle/fixed + connection              | <b>E-31, G-18</b>                         |
| LVS04147 | Connect.160A 4P Lin.BW/device 160A W165  | <b>G-15</b>                  | LVS04404 | Linery FC distribution block for ComPacT NSX250 4P toggle/fixed + connection              | <b>E-31, E-40, G-18</b>                   |
| LVS04148 | Connect.160A 4P Lin.BW/device 160A W440  | <b>G-15</b>                  | LVS04405 | Linery FC distribution block for ComPacT NSX2503P fixed/plug-in + connection              | <b>E-32, E-33, E-34, G-18</b>             |
| LVS04149 | Connection 160A 4P L380 /Linery DX 1P    | <b>E-37, G-24</b>            | LVS04406 | Linery FC distribution block for ComPacT NSX250 4P fixed/plug-in + connection             | <b>E-32, E-33, E-34, G-18</b>             |
| LVS04150 | 8 IPXXB covers/ Linery BW insulated bb   | <b>G-14</b>                  | LVS04407 | Linery FC distribution block for ComPacT NSX250 3P fixed W/O connection                   | <b>E-31, E-32, E-33, E-34, G-18</b>       |
| LVS04151 | 12 Terminals 6/10² for Linery BW bbar    | <b>G-14</b>                  | LVS04408 | Linery FC distribution block for ComPacT NSX250 4P fixed W/O connection                   | <b>E-31, E-32, E-33, E-34, E-40, G-18</b> |
| LVS04152 | 12 Terminals 1x16² for Linery BW bbar    | <b>G-14</b>                  | LVS04410 | Linery FC distribution block for ComPacT NSXm 160A 3P toggle/fixed + connection           | <b>E-36, G-20</b>                         |
| LVS04155 | Additional blk 2x35² 3P/ Linery DP 250A  | <b>G-14</b>                  | LVS04411 | Linery FC distribution block for ComPacT NSXm 160A 4P toggle/fixed + connection           | <b>E-36, G-20</b>                         |
| LVS04156 | Additional blk 2x35² 4P/ Linery DP 250A  | <b>G-16</b>                  | LVS04412 | Linery FC distribution block for ComPacT NSXm 160A 3P toggle/fixed                        | <b>E-36, G-20</b>                         |
| LVS04158 | 20 Screws 8.8 Class M6x12/ Linery BW bb  | <b>G-14</b>                  | LVS04413 | Linery FC distribution block for ComPacT NSXm 160A 4P toggle/fixed                        | <b>E-36, G-20</b>                         |
| LVS04161 | 4 Threaded bars 160A L1000/Linery BS bb  | <b>G-9, G-10</b>             | LVS04416 | Linery FC distribution block for ComPacT NSXm 160A 3P toggle/fixed with VIGI + connection | <b>E-36, G-20</b>                         |
| LVS04162 | 4 Threaded bars 250A L1000/Linery BS bb  | <b>G-9, G-10</b>             | LVS04417 | Linery FC distribution block for ComPacT NSXm 160A 4P toggle/fixed with VIGI + connection | <b>E-36, G-20</b>                         |
| LVS04163 | 4 Threaded bars 400A L1000/Linery BS bb  | <b>G-9, G-10</b>             | LVS04418 | Linery FC distribution block for ComPacT NSXm 160A 3P toggle/fixed with VIGI              | <b>E-36, G-20</b>                         |
| LVS04171 | 4 Threaded bars 160A L1400/Linery BS bb  | <b>G-9, G-10</b>             | LVS04419 | Linery FC distribution block for ComPacT NSXm 160A 3P toggle/fixed without connection     | <b>E-36, G-20</b>                         |
| LVS04172 | 4 Threaded bars 250A L1400/Linery BS bb  | <b>G-9, G-10</b>             | LVS04420 | Linery FC distribution block for ComPacT NSXm 160A 4P toggle/fixed without connection     | <b>E-36, G-20</b>                         |
| LVS04173 | 4 Threaded bars 400A L1400/Linery BS bb  | <b>G-9, G-10</b>             | LVS04423 | Connection NSX toggle-3P 250A fixed horz                                                  | <b>E-20</b>                               |
| LVS04174 | 4 Threaded bars 630A L1400/Linery BS bb  | <b>G-9, G-10</b>             | LVS04424 | Connection NSX toggle-4P 250A fixed horz                                                  | <b>E-20</b>                               |
| LVS04191 | Linery BS rear busbar support 400A       | <b>E-35, E-36, G-9</b>       | LVS04425 | Conn.Transf. NSX tog -3P 250A fixed horz                                                  | <b>E-20</b>                               |
| LVS04192 | Linery BS multistage b.Bar support 630A  | <b>E-35, E-36, G-10</b>      | LVS04426 | Conn.Transf. NSX tog -4P 250A fixed horz                                                  | <b>E-20</b>                               |
| LVS04194 | 20 Bolts 8.8 Class m6x20 /5mm copper bar | <b>G-12</b>                  | LVS04427 | Conn. NSX/INS -3P 250A fixed/withd horz                                                   | <b>E-22, E-23, E-24, E-40</b>             |
| LVS04195 | 40 Screws 8.8 Class m6x16/threaded bar   | <b>G-12</b>                  | LVS04428 | Conn. NSX/INS -4P 250A fixed/withd horz                                                   | <b>E-22, E-23, E-24, E-40</b>             |
| LVS04197 | Barrier h1500mm/Linery BS multistage bb  | <b>G-10</b>                  | LVS04429 | Universal connection in duct 250A 3P                                                      | <b>E-20, E-21, E-22, E-23, E-24</b>       |
| LVS04198 | Barrier h100mm /Linery BS rear busbar    | <b>G-9</b>                   | LVS04430 | Universal connection in duct 250A 4P                                                      | <b>E-20, E-21, E-22, E-23, E-24</b>       |
| LVS04200 | Earth bar 35²/40 clamps L450 Linery TB   | <b>G-38</b>                  | LVS04431 | Connection NSX toggle-3P 250A plugin hz                                                   | <b>E-21, E-24</b>                         |
| LVS04201 | 12X3mm dir.Earth bar 35² L330 Linery TB  | <b>G-38</b>                  |          |                                                                                           |                                           |
| LVS04202 | 2 Earth bar 35²/20 clamp L200 Linery TB  | <b>G-38</b>                  |          |                                                                                           |                                           |
| LVS04205 | 2 Earth bar mod.dev.rail sup.            | <b>G-38</b>                  |          |                                                                                           |                                           |
| LVS04210 | 2 Insulat.Spacers/neutral bar Linery TB  | <b>G-38</b>                  |          |                                                                                           |                                           |
| LVS04214 | 4 Earth blk 12x4² term.Clamp Linery TB   | <b>G-38</b>                  |          |                                                                                           |                                           |
| LVS04215 | 4 Earth blk 3x16² term.Clamp Linery TB   | <b>G-38</b>                  |          |                                                                                           |                                           |
| LVS04224 | 5 practic raisers                        | <b>A-17, F-24</b>            |          |                                                                                           |                                           |
| LVS04226 | 2 modular device rails L1600             | <b>A-5, A-17, F-26, G-40</b> |          |                                                                                           |                                           |

## Index Of Commercial References With Description

| Com. no. | Description                              | Page                                      | Com. no. | Description                               | Page                                        |
|----------|------------------------------------------|-------------------------------------------|----------|-------------------------------------------|---------------------------------------------|
| LVS04432 | Connection NSX toggle-4P 250A plugin hz  | <b>E-21, E-24</b>                         | LVS04505 | Linery LGY vertical profile 1250A L1670   | <b>G-4, G-7, G-39, I-12</b>                 |
| LVS04453 | Connection NSX toggle-3P 630A fixed horz | <b>E-20</b>                               | LVS04506 | Linery LGY vertical profile 1600A L1670   | <b>G-4, G-7</b>                             |
| LVS04454 | Connection NSX toggle-4P 630A fixed horz | <b>E-20</b>                               | LVS04507 | Linery LGYE vert profile 2000A L1625      | <b>G-5</b>                                  |
| LVS04455 | Conn.Transf. NSX tog -3P 630A fixed hz   | <b>E-20</b>                               | LVS04508 | Linery LGYE vert profile 2500A L1625      | <b>G-5</b>                                  |
| LVS04456 | Conn.Transf. NSX tog -4P 630A fixed hz   | <b>E-20</b>                               | LVS04509 | Linery LGYE vert profile 3200A L1625      | <b>G-5</b>                                  |
| LVS04459 | Universal connection in duct 630A 3P     | <b>E-20, E-21, E-22, E-23, E-24</b>       | LVS04510 | Linery LGYE vert profile 4000A L1625      | <b>G-5</b>                                  |
| LVS04460 | Universal connection in duct 630A 4P     | <b>E-20, E-21, E-22, E-23, E-24</b>       | LVS04512 | Pe v.Bar w.Holes 25x5 L1675 Linery TB     | <b>G-39</b>                                 |
| LVS04461 | Connection NSX toggle-3P 630A plugin hz  | <b>E-21, E-24</b>                         | LVS04515 | Pe v.Bar w.Holes 50x5 L1675 Linery TB     | <b>G-39</b>                                 |
| LVS04462 | Connection NSX toggle-4P 630A plugin hz  | <b>E-21, E-24</b>                         | LVS04516 | Drilled flat bar Linery BS 60x5 L1675     | <b>G-6, G-8</b>                             |
| LVS04473 | Connection NS -3P 1000A fixed horizontal | <b>E-17, I-22, I-36</b>                   | LVS04518 | Drilled flat bar Linery BS 80x5 L1675     | <b>G-6, G-8</b>                             |
| LVS04474 | Connection NT -4P 1000A fixed horizontal | <b>E-17, I-22, I-36</b>                   | LVS04525 | Drilled flat bar Linery BS 50x10 L1675    | <b>G-8</b>                                  |
| LVS04475 | Connection NT -3P 1250A fixed            | <b>E-10, E-11, I-21, I-35</b>             | LVS04526 | Drilled flat bar Linery BS 60x10 L1675    | <b>G-8</b>                                  |
| LVS04476 | Connection NT -4P 1250A fixed            | <b>E-10, E-11, I-21, I-35</b>             | LVS04528 | Drilled flat bar Linery BS 80x10 L1675    | <b>G-6, G-8</b>                             |
| LVS04477 | Connection NS/NT -3P 1250A withdrawable  | <b>E-10, E-11, E-16, I-20, I-34</b>       | LVS04536 | Plain hz flat bar Linery BS 60x5 L2000    | <b>G-3</b>                                  |
| LVS04478 | Connection NS/NT -4P 1250A withdrawable  | <b>E-10, E-11, E-15, E-16, I-20, I-34</b> | LVS04538 | Plain hz flat bar Linery BS 80x5 L2000    | <b>G-3</b>                                  |
| LVS04481 | Connection INS-INV -3P 1600A fixed       | <b>E-39</b>                               | LVS04545 | Plain hz flat bar Linery BS 50x10 L2000   | <b>G-3</b>                                  |
| LVS04482 | Connection INS-INV -4P 1600A fixed       | <b>E-39</b>                               | LVS04546 | Plain hz flat bar Linery BS 60x10 L2000   | <b>G-3</b>                                  |
| LVS04483 | Conn.Transf. NS -3P 1000A fixed horz     | <b>E-17, I-49</b>                         | LVS04548 | Plain hz flat bar Linery BS 80x10 L2000   | <b>G-3</b>                                  |
| LVS04484 | Conn.Transf. NS -4P 1000A fixed horz     | <b>E-17, I-49</b>                         | LVS04550 | Plain hz flat bar Linery BS100x10 L2000   | <b>G-3, G-6</b>                             |
| LVS04485 | Connection NS -3P 1250A fixed            | <b>E-15, I-20, I-34</b>                   | LVS04552 | Plain hz flat bar Linery BS120x10 L2000   | <b>G-3, G-6</b>                             |
| LVS04486 | Connection NS -4P 1250A fixed            | <b>E-15, E-16, I-20, I-34</b>             | LVS04560 | Linery LGYE profile 630A L2000            | <b>G-2, G-5</b>                             |
| LVS04487 | Connection NS -3P 1600A fixed            | <b>E-15, E-16, I-20, I-34</b>             | LVS04561 | Linery LGYE profile 800A L2000            | <b>G-2, G-5</b>                             |
| LVS04488 | Connection NS -4P 1600A fixed            | <b>E-15, E-16, I-20, I-34</b>             | LVS04562 | Linery LGYE profile 1000A L2000           | <b>G-2, G-5</b>                             |
| LVS04489 | Connection NT -3P 1600A fixed            | <b>E-10, E-11, I-20, I-34</b>             | LVS04563 | Linery LGYE profile 1250A L2000           | <b>G-2, G-5</b>                             |
| LVS04490 | Connection NT -4P 1600A fixed            | <b>E-10, E-11, I-21, I-35</b>             | LVS04564 | Linery LGYE profile 1600A L2000           | <b>G-2, G-5</b>                             |
| LVS04491 | Connection NS/NT -3P 1600A withdrawable  | <b>E-10, E-11, E-15, E-16, I-20, I-34</b> | LVS04565 | Linery LGYE profile 2000A L2000           | <b>G-2</b>                                  |
| LVS04492 | Connection NS/NT -4P 1600A withdrawable  | <b>E-10, E-11, E-15, E-16, I-20, I-34</b> | LVS04566 | Linery LGYE profile 2500A L2000           | <b>G-2</b>                                  |
| LVS04493 | Connection horizontal LGYE NW 1600A 3P   | <b>E-3, E-5</b>                           | LVS04567 | Linery LGYE profile 3200A L2000           | <b>G-2</b>                                  |
| LVS04494 | Connection horizontal LGYE NW 1600A 4P   | <b>E-3, E-5</b>                           | LVS04568 | Linery LGYE profile 4000A L2000           | <b>G-2</b>                                  |
| LVS04495 | Connection horizontal LGYE NW 2500A 3P   | <b>E-3, E-5</b>                           | LVS04602 | Linery LGYE vertical connection 1600A     | <b>G-4, G-5, G-7, G-39</b>                  |
| LVS04496 | Connection horizontal LGYE NW 2500A 4P   | <b>E-3, E-5</b>                           | LVS04603 | Linery LGYE vert. Shifted connect. 1600A  | <b>G-5</b>                                  |
| LVS04497 | Connection horizontal LGYE NW 3200A 3P   | <b>E-3, E-5</b>                           | LVS04604 | Linery LGYE vert. Short connect. 2500A    | <b>G-5</b>                                  |
| LVS04498 | Connection horizontal LGYE NW 3200A 4P   | <b>E-3, E-5</b>                           | LVS04605 | Linery LGYE vert. Long connect. 2500A     | <b>G-5</b>                                  |
| LVS04502 | Linery LGY vertical profile 630A L1670   | <b>G-4, G-7, G-39, I-12</b>               | LVS04607 | Linery LGYE vertical connection 4000A     | <b>G-5</b>                                  |
| LVS04503 | Linery LGY vertical profile 800A L1670   | <b>G-4, G-7, G-39, I-12</b>               | LVS04620 | Linery LGYE horizontal joint 1600A        | <b>G-2</b>                                  |
| LVS04504 | Linery LGY vertical profile 1000A L1670  | <b>G-4, G-7</b>                           | LVS04621 | Linery LGYE horizontal joint 2500A        | <b>G-2</b>                                  |
|          |                                          |                                           | LVS04623 | Linery LGYE horizontal joint 4000A        | <b>G-2</b>                                  |
|          |                                          |                                           | LVS04624 | Linery LGYE isolating screen neutral      | <b>G-2</b>                                  |
|          |                                          |                                           | LVS04634 | Connection 1000A 5mm hz.Bar/ LGY profile  | <b>G-4</b>                                  |
|          |                                          |                                           | LVS04635 | Connection 1600A 5mm hz.Bar/ LGY profile  | <b>G-4, G-7, G-8</b>                        |
|          |                                          |                                           | LVS04636 | Connect. 1600A 10mm hz bar/ LGY v.Profile | <b>E-13, E-19, G-4, G-6, G-7, G-8, G-39</b> |
|          |                                          |                                           | LVS04637 | Connect.Plate 3200A 10mm hz/ v.Flat bar   | <b>E-7, G-6</b>                             |
|          |                                          |                                           | LVS04638 | Connect.Plate 4000A 10mm hz/ v.Flat bar   | <b>G-4, G-6</b>                             |
|          |                                          |                                           | LVS04640 | Joint for 50/60mm bar/Linery BS hz bbar   | <b>G-3</b>                                  |
|          |                                          |                                           | LVS04641 | Joint for 80/100mm bar/Linery BS hz bar   | <b>G-3</b>                                  |
|          |                                          |                                           | LVS04642 | Mounting hardware/joint>80mm Linery LGY   | <b>E-7</b>                                  |

## Index Of Commercial References With Description

| Com. no. | Description                              | Page                                                                                | Com. no. | Description                                          | Page                                      |
|----------|------------------------------------------|-------------------------------------------------------------------------------------|----------|------------------------------------------------------|-------------------------------------------|
| LVS04643 | Joint for 120mm bar/Linergy BS hz.Busbar | <b>G-3</b>                                                                          | LVS04752 | Insulated flex.bar 32x6 L1800                        | <b>G-22, G-23</b>                         |
| LVS04645 | 20 Screw/joint 2x10mm Linergy BS hz/v bb | <b>G-6</b>                                                                          | LVS04753 | Insulated flex.bar 32x8 L1800                        | <b>G-22, G-23</b>                         |
| LVS04646 | Mounting hardware Linergy LGEu3200A      | <b>G-2, G-5</b>                                                                     | LVS04759 | 20 M8 torque nuts                                    | <b>G-13</b>                               |
| LVS04651 | Linergy LGY lateral busbar support       | <b>G-4</b>                                                                          | LVS04766 | 20 M8 LGY bolts for cab.Lug/flex bar L25             | <b>G-13, G-39</b>                         |
| LVS04652 | Linergy LGY rear busbar support          | <b>G-7</b>                                                                          | LVS04767 | 20 M8 LGY bolts for copper bar L39                   | <b>G-13</b>                               |
| LVS04653 | Linergy BS rear vert.Support 5/10mm bar  | <b>G-8</b>                                                                          | LVS04768 | Set of 12 screwplates for Linergy evolution 2500A    | <b>G-13</b>                               |
| LVS04656 | Linergy TB pen kit / LGY profile         | <b>G-39</b>                                                                         | LVS04769 | Set of 8 screwplates for Linergy evolution 4000A     | <b>G-13</b>                               |
| LVS04657 | Linergy TB 3 flat bar supp.For vert.Pe   | <b>G-39</b>                                                                         | LVS04773 | 20 M8/diam.24 Flat washers flex.Bar/LGY              | <b>G-13</b>                               |
| LVS04658 | 12 Stops/1600A bott.Support Linergy LGYE | <b>G-5</b>                                                                          | LVS04774 | 20 M8/diam.28 Flat washers flex.Bar/LGY              | <b>G-13</b>                               |
| LVS04659 | 12 Stops/4000A bott.Support Linergy LGYE | <b>G-5</b>                                                                          | LVS04775 | 20 M8/diam.20 Flat washers lugs<25 <sup>2</sup> /LGY | <b>G-13</b>                               |
| LVS04661 | Fixed support vert. Bb Linergy LGYE/BS   | <b>G-5, G-6</b>                                                                     | LVS04782 | 20 Bolts 8.8 Class M8x20 /Linergy BS                 | <b>G-6, G-13</b>                          |
| LVS04662 | Free busbar support Linergy LGYE/BS      | <b>E-3, E-5, E-10, E-11, E-13, E-14, E-15, E-16, E-19, E-39, G-2, G-3, G-5, G-6</b> | LVS04783 | 21 Bolts 8.8 Class M8x25 /Linergy BS                 | <b>G-13</b>                               |
| LVS04663 | Bottom lat.V.5/10 Bb support lin.LGYE/BS | <b>G-5, G-6</b>                                                                     | LVS04784 | 22 Bolts 8.8 Class M8x30 /Linergy BS                 | <b>G-13</b>                               |
| LVS04664 | Fixed support hz. Bb Linergy LGYE/BS     | <b>G-2, G-3</b>                                                                     | LVS04785 | 23 Bolts 8.8 Class M8x35 /Linergy BS                 | <b>G-13</b>                               |
| LVS04665 | Horiz.10Mm bb support D600 Linergy BS    | <b>G-2</b>                                                                          | LVS04786 | 24 Bolts 8.8 Class M8x40 /Linergy BS                 | <b>G-13</b>                               |
| LVS04666 | Bot.Lat.5/10 Bb support W300 lin.LGYE/BS |                                                                                     | LVS04787 | 25 Bolts 8.8 Class M8x45 /Linergy BS                 | <b>G-13</b>                               |
| LVS04667 | 2 Horizontal pe supports Linergy TB      | <b>A-6, A-19, F-24, G-39</b>                                                        | LVS04788 | 26 Bolts 8.8 Class M8x50 /Linergy BS                 | <b>G-13</b>                               |
| LVS04672 | 2 Connect.Plate hz/v.Pe bar Linergy TB   | <b>G-39</b>                                                                         | LVS04794 | 12 Phase marker/Linergy LGY/LGYE profile             | <b>G-13</b>                               |
| LVS04678 | Free 5/10 busbar support D600 Linergy BS | <b>G-2</b>                                                                          | LVS04809 | Linergy FC tooth-caps                                | <b>E-31, E-32, E-33, E-34, E-40, G-19</b> |
| LVS04683 | Joint Linergy vert.LGY/LGYE 1600A 3P     | <b>E-3, E-5</b>                                                                     | LVS04810 | Tooth-cap 1P Linergy FC D.BLK NSXm 160A              | <b>E-36, G-21</b>                         |
| LVS04684 | Joint Linergy vert.LGY/LGYE 1600A 4P     | <b>E-3, E-5</b>                                                                     | LVS04842 | Conn.Cover hz.Fix.NS1600                             | <b>E-17</b>                               |
| LVS04685 | Joint Linergy vertical LGYE 2500A NW     | <b>E-3, E-5</b>                                                                     | LVS04851 | Front conn.Cover v.Fix.NS1600                        | <b>E-15, H-4</b>                          |
| LVS04687 | Joint Linergy vertical LGYE 3200A NW     | <b>E-3, E-5</b>                                                                     | LVS04852 | Front conn.Cover v.NS1600-NT                         | <b>E-10, E-15, H-4</b>                    |
| LVS04690 | Flange for flat bars                     | <b>E-7</b>                                                                          | LVS04853 | Rear conn.Cov.V.Fix.NS1600                           | <b>E-15, H-4</b>                          |
| LVS04691 | Flange for edgewise bars                 | <b>E-10, E-13, E-15, E-19</b>                                                       | LVS04854 | Rear conn.Cover v.NS1600-NT                          | <b>E-10, E-15, H-4</b>                    |
| LVS04692 | Flange for flat bars W400                | <b>E-13, E-19</b>                                                                   | LVS04855 | Busbar cover v.NS1600-NT W400                        | <b>E-13, E-19</b>                         |
| LVS04693 | Conn.Sup.70mm b/centres                  | <b>E-10, E-11, E-15, E-16</b>                                                       | LVS04860 | Busbar cover v.NW/ISFL W650                          | <b>E-7, E-56</b>                          |
| LVS04694 | Conn.Sup 115mm b/centres                 | <b>E-2, E-4, E-6, E-14, E-39</b>                                                    | LVS04861 | Front connection cover NW                            | <b>E-2, E-6, E-8, H-4</b>                 |
| LVS04703 | Canalis interface 1600A 3P               | <b>E-16, E-11</b>                                                                   | LVS04863 | Rear connection cover NW                             | <b>E-2, H-4</b>                           |
| LVS04704 | Canalis interface 1600A 4P               | <b>E-11, E-16</b>                                                                   | LVS04871 | Canalis cover                                        | <b>H-4</b>                                |
| LVS04711 | Canalis conn.Front NS-NT 3P              | <b>E-16, E-11</b>                                                                   | LVS04901 | Form 3 horizontal partition                          | <b>H-6</b>                                |
| LVS04712 | Canalis conn.Front NS-NT 4P              | <b>E-11, E-16</b>                                                                   | LVS04911 | Inter-cubicle partition D400                         | <b>H-8</b>                                |
| LVS04713 | Canalis conn.Rear NS-NT 3P               | <b>E-11, E-16</b>                                                                   | LVS04920 | W300 fr.Barrier for lat.V.bb.                        | <b>H-5</b>                                |
| LVS04714 | Canalis conn.Rear NS-NT 4P               | <b>E-11, E-16</b>                                                                   | LVS04921 | W150 fr.Barrier for lat.V.bb.                        | <b>H-5</b>                                |
| LVS04715 | Canalis conn.1600A NW 3P                 | <b>E-4</b>                                                                          | LVS04922 | Form 2 side barrier for lat.Vert.bb.                 | <b>H-5</b>                                |
| LVS04716 | Canalis conn.1600A NW 4P                 | <b>E-4</b>                                                                          | LVS04924 | Form 2 side barrier restoration kit                  | <b>H-5</b>                                |
| LVS04725 | Canalis conn.2500A NW 3P                 | <b>E-4</b>                                                                          | LVS04925 | Partition conn.LGYE dev>800A W650 D600               | <b>H-4</b>                                |
| LVS04726 | Canalis conn.2500A NW 4P                 | <b>E-4</b>                                                                          | LVS04926 | Partition conn. Dev>800A W650 D600                   | <b>E-14, E-39, H-4</b>                    |
| LVS04735 | Canalis conn.3200A NW 3P                 | <b>E-4</b>                                                                          | LVS04927 | Additional partition conn.W650 D600                  | <b>E-3, E-5</b>                           |
| LVS04736 | Canalis conn.3200A NW 4P                 | <b>E-4</b>                                                                          | LVS04928 | Additional partition LGYE conn.W650 D600             | <b>H-4</b>                                |
| LVS04742 | Insulated flex.bar 20x2 L1800            | <b>G-22, G-23</b>                                                                   | LVS04943 | F3 partition rear support                            | <b>H-6</b>                                |
| LVS04743 | Insulated flex.bar 20x3 L1800            | <b>G-22, G-23</b>                                                                   | LVS04946 | F4 backplate front conn.D600                         | <b>H-7</b>                                |
| LVS04746 | Insulated flex.bar 24x5 L1800            | <b>G-22, G-23</b>                                                                   | LVS04951 | Form 4 cable gland plate 3/4 modules                 | <b>H-7</b>                                |
| LVS04751 | Insulated flex.bar 32x5 L1800            | <b>G-22, G-23</b>                                                                   | LVS04952 | Form 4 cable gland plate 5/6 modules                 | <b>H-7</b>                                |
|          |                                          |                                                                                     | LVS04953 | Form 4b cover transf.Connection 3/5m                 | <b>H-7</b>                                |

## Index Of Commercial References With Description

| Com. no.        | Description                                                       | Page                                | Com. no. | Description                            | Page                                |
|-----------------|-------------------------------------------------------------------|-------------------------------------|----------|----------------------------------------|-------------------------------------|
| LVS04954        | Form 4b cover transf.Connection 4/6m                              | H-7                                 | LVS08438 | IP30 plain roof W800 D400              | F-3, F-4, F-15                      |
| LVS04955        | Form 3 rear conn. -Vert.Partition 3/4m                            | H-6                                 | LVS08456 | IP55 plain roof W650 D400              | F-4                                 |
| LVS04956        | Form 3 rear conn. -Vert.Partition 5/6m                            | H-6                                 | LVS08458 | IP55 plain roof W800 D400              | F-4                                 |
| LVS04963        | Form 2 cover horz.bb.4000A W300 D600                              | H-5                                 | LVS08476 | IP30 ventilated roof W650 D400         | F-32                                |
| LVS04964        | Form 2 cover horz.bb.4000A W400 D600                              | H-5                                 | LVS08478 | IP55 ventilated roof W800 D400         | E-59, F-32                          |
| LVS04966        | Form 2 cover horz.bb.4000A W650 D600                              | H-5                                 | LVS08483 | IP55 plain gl.pl.W300 D400             | A-21, F-19                          |
| LVS04968        | Form 2 cover horz.bb.4000A W800 D600                              | H-5                                 | LVS08484 | IP55 plain gl.pl.W400 D400             | A-21, F-19                          |
| LVS04973        | Form 2 cover horz.Busbar W300 D400                                | H-5                                 | LVS08486 | IP55 plain gl.pl.W650 D400             | A-7, A-21, F-2, F-3, F-4, F-19      |
| LVS04974        | Form 2 cover horz.Busbar W400 D400                                | H-5                                 | LVS08487 | IP55 plain gl.pl.W650+150 D400         | F-3, F-4, F-19                      |
| LVS04976        | Form 2 cover horz.Busbar W650 D400                                | H-5                                 | LVS08488 | IP55 plain gl.pl.W800 D400             | F-19                                |
| LVS04978        | Form 2 cover horz.Busbar W800 D400                                | H-5                                 | LVS08493 | IP30 2-part gl.pl.W300 D400            | F-19                                |
| LVS04983        | Form 2 cover horz.Busbar W300 D600                                | H-5                                 | LVS08494 | IP30 2-part gl.pl.W400 D400            | A-21, F-19                          |
| LVS04984        | Form 2 cover horz.Busbar W400 D600                                | H-5                                 | LVS08496 | IP30 2-part gl.pl.W650 D400            | F-19                                |
| LVS04986        | Form 2 cover horz.Busbar W650 D600                                | H-5                                 | LVS08497 | IP30 2-part gl.pl.W650+150 D400        | A-21, F-19                          |
| LVS04988        | Form 2 cover horz.Busbar W800 D600                                | H-5                                 | LVS08498 | IP30 2-part gl.pl.W800 D400            | F-19                                |
| <b>LVS07...</b> |                                                                   |                                     | LVS08513 | IP30 plain door W300                   | F-2, F-14                           |
| LVS07051        | 4 Cable connect.1P 160A 70mm² Linergy BS                          | G-12                                | LVS08514 | IP30 plain door W400                   | F-14                                |
| LVS07052        | 4 Cable conn.1P 250A 185mm² Linergy BS                            | G-12                                | LVS08516 | IP30 plain door W650                   | F-3, F-4, F-14                      |
| LVS07053        | 4 Cable connect1P 400A 300mm² Linergy BS                          | G-12                                | LVS08518 | IP30 plain door W800                   | F-3, F-4, F-14                      |
| LVS07931        | Ral 7016 rotative handle PrismaSeT P Active/ PrismaSeT G Active   | A-21, F-29                          | LVS08523 | IP55 plain door W300                   | F-17                                |
| LVS07932        | Euro rotative white handle PrismaSeT P Active/ PrismaSeT G Active | A-21, F-29                          | LVS08524 | IP55 plain door W400                   | F-17                                |
| LVS07933        | Assa rotative white handle PrismaSeT P Active/ PrismaSeT G Active | A-21, F-29                          | LVS08526 | IP55 plain door W650                   | F-4, F-17                           |
| LVS07938        | Handle padlocking kit for 1 locker                                | A-21, F-29                          | LVS08528 | IP55 plain door W800                   | F-4, F-17                           |
| LVS07940        | Barrel bloc with combination lock 405                             | A-21, F-29                          | LVS08534 | IP30 transparent door W400             | F-14                                |
| LVS07941        | Barrel bloc with combination lock 455                             | A-21, F-29                          | LVS08536 | IP30 transparent door W650             | F-2, F-4, F-14                      |
| LVS07942        | Barrel bloc with combination lock 1242e                           | A-21, F-29                          | LVS08538 | IP30 transparent door W800             | F-2, F-4, F-14                      |
| LVS07943        | Barrel bloc with combination lock 3113A                           | A-21, F-29                          | LVS08544 | IP55 transparent door W400             | F-17                                |
| LVS07944        | Barrel bloc with combination lock 2433A                           | A-21, F-29                          | LVS08546 | IP55 transparent door W650             | F-4, F-17                           |
| LVS07945        | Insert bloc combinaison.din double bar                            | A-21, F-29                          | LVS08548 | IP55 transparent door W800             | F-4, F-17                           |
| LVS07946        | Insert bloc combinaison.screwdriver slot                          | A-21, F-29                          | LVS08560 | 10M hinged front.Plate sup. Kit W650   | A-7, A-21, E-8, F-5, F-22           |
| LVS07949        | Insert bloc combi.8mm male triangle                               | A-21, F-29                          | LVS08562 | 12M hinged front plate sup.Frame W650  | E-8, E-9                            |
| LVS07951        | Insert bloc combinaison.6mm male square                           | A-21, F-29                          | LVS08564 | Hinged fr.Plate sup.Frame W400         | A-7, A-21, F-5, F-22                |
| LVS07953        | Insert bloc combinaison.8mm male square                           | A-21, F-29                          | LVS08566 | Hinged fr.Plate sup.Frame W650         | A-7, A-21, F-2, F-3, F-4, F-5, F-22 |
| LVS07956        | Barrel bloc with combination lock 2432E                           | A-21, F-29                          | LVS08574 | IP30 cover frame W400                  | F-14                                |
| <b>LVS08...</b> |                                                                   |                                     | LVS08576 | IP30 cover frame W650                  | F-2, F-3, F-14                      |
| LVS08403        | PrismaSeT P Active framework W300 D400                            | A-7, A-21, F-5, F-20                | LVS08578 | IP30 cover frame W800                  | F-3                                 |
| LVS08404        | PrismaSeT P Active framework W400 D400                            | A-7, A-21, F-5, F-20                | LVS08585 | Front plate hinge kit                  | A-21, F-22                          |
| LVS08406        | PrismaSeT P Active framework W650 D400                            | A-7, A-21, F-2, F-3, F-4, F-5, F-20 | LVS08593 | IP30 door cut-out hsi W300             | F-14                                |
| LVS08407        | PrismaSeT P Active framework W650+150 D400                        | F-3, F-4, F-5                       | LVS08594 | IP30 door cut-out hsi W400             | F-14                                |
| LVS08408        | PrismaSeT P Active framework W800 D400                            | F-5                                 | LVS08603 | PrismaSeT P Active framework W300 D600 | A-7, A-22, F-2, F-5, F-20           |
| LVS08433        | IP30 plain roof W300 D400                                         | F-15                                |          |                                        |                                     |
| LVS08434        | IP30 plain roof W400 D400                                         | F-15                                |          |                                        |                                     |
| LVS08436        | IP30 plain roof W650 D400                                         | F-2, F-3, F-4, F-15                 |          |                                        |                                     |



## Index Of Commercial References With Description

| Com. no. | Description                                      | Page                           | Com. no.  | Description                                                                       | Page                        |
|----------|--------------------------------------------------|--------------------------------|-----------|-----------------------------------------------------------------------------------|-----------------------------|
| LVS08604 | PrismaSeT P Active framework W400 D600           | A-7, A-22, F-5, F-20           | LVS08722  | Combination kit for lifting                                                       | A-7, A-22, F-20, J-13       |
| LVS08606 | PrismaSeT P Active framework W650 D600           | A-7, A-22, F-2, F-4, F-5, F-20 | LVS08723  | Plinth h100 W300 D400                                                             | A-22, F-19                  |
| LVS08607 | PrismaSeT P Active framework W650+150 D600       | A-7, A-22, F-2, F-4, F-5, F-20 | LVS08724  | Plinth h100 W400 D400                                                             | F-19                        |
| LVS08608 | PrismaSeT P Active framework W800 D600           | F-5                            | LVS08726  | Plinth h100 W650 D400                                                             | F-19                        |
| LVS08633 | IP30 plain roof W300 D600                        | F-2, F-15                      | LVS08728  | Plinth h100 W800 D400                                                             | F-19                        |
| LVS08634 | IP30 plain roof W400 D600                        | F-15                           | LVS08733  | IP30 rear panel W300                                                              | F-2, F-14                   |
| LVS08636 | IP30 plain roof W650 D600                        | F-2, F-4, F-15                 | LVS08734  | IP30 rear panel W400                                                              | F-14                        |
| LVS08638 | IP30 plain roof W800 D600                        | F-2, F-4, F-15                 | LVS08736  | IP30 rear panel W650                                                              | F-2, F-14                   |
| LVS08640 | PrismaSeT P Active Green Cover W300              | F-2, F-15                      | LVS08738  | IP30 rear panel W800                                                              | F-2, F-14                   |
| LVS08641 | PrismaSeT P Active Green Cover W400              | F-15                           | LVS08748  | IP55 rear panel W800                                                              | E-59                        |
| LVS08642 | PrismaSeT P Active Green Cover W650              | F-4, F-15                      | LVS08749  | IP55 rear panel W800 for capacitors                                               |                             |
| LVS08643 | PrismaSeT P Active Green Cover W800              | F-2, F-3, F-15                 | LVS08750  | Set of 2 side panels D400                                                         | I-8                         |
| LVS08656 | IP55 plain roof W650 D600                        | F-4                            | LVS08750D | PrismaSeT P Active Green Cover + Wireless Panel Server W400 +lateral panels D400  | F-15                        |
| LVS08658 | IP55 plain roof W800 D600                        | F-4                            | LVS08751D | PrismaSeT P Active Green Cover + Wireless Panel Server W650 +lateral panels D400  | F-2, F-3, F-15              |
| LVS08676 | IP55 ventilated roof W650 D600                   | F-32                           | LVS08752D | PrismaSeT P Active Green Cover + Wireless Panel Server W800 +lateral panels D400  | F-15                        |
| LVS08678 | IP55 ventilated roof W800 D600                   | E-59, F-32                     | LVS08753  | PrismaSeT P Active rear access side Panels D400                                   | F-3, F-4, F-15              |
| LVS08683 | IP55 plain gl.pl.W300 D600                       | A-7, A-22, F-2, F-19           | LVS08755  | PrismaSeT P Active Green Cover + Wireless Panel Server W400 +lateral panels D400  | A-7, A-22, F-20, I-7        |
| LVS08684 | IP55 plain gl.pl.W400 D600                       | A-22, F-19                     | LVS08755D | Set of 2 side panels D400                                                         | F-18                        |
| LVS08686 | IP55 plain gl.pl.W650 D600                       | A-7, A-22, F-2, F-4, F-19      | LVS08756  | PrismaSeT P Active rear access side panels for L shape D400                       | F-18                        |
| LVS08687 | IP55 plain gl.pl.W650+150 D600                   | F-2, F-4, F-19                 | LVS08756D | PrismaSeT P Active Green Cover + Wireless Panel Server W650 + lateral panels D400 | F-18                        |
| LVS08688 | IP55 plain gl.pl.W800 D600                       | F-19                           | LVS08757D | PrismaSeT P Active Green Cover + Wireless Panel Server W800 + lateral panels D400 | A-7, A-22, F-18, F-20       |
| LVS08693 | IP30 2-part gl.pl.W300 D600                      | F-19                           | LVS08760  | Set of 2 side panels D600                                                         | I-8                         |
| LVS08694 | IP30 2-part gl.pl.W400 D600                      | A-22, F-19                     | LVS08760D | PrismaSeT P Active Green Cover + Wireless Panel Server W400 + lateral panels D600 | F-15                        |
| LVS08696 | IP30 2-part gl.pl.W650 D600                      | F-19                           | LVS08761D | PrismaSeT P Active Green Cover + Wireless Panel Server W650 + lateral panels D600 | F-2, F-15                   |
| LVS08697 | IP30 2-part gl.pl.W650+150D600                   | A-22, F-19                     | LVS08762D | PrismaSeT P Active Green Cover + Wireless Panel Server W800 + lateral panels D600 | F-4, F-15                   |
| LVS08698 | IP30 2-part gl.pl.W800 D600                      | F-19                           | LVS08763  | PrismaSeT P Active rear access side Panels D400                                   | F-4, F-18                   |
| LVS08700 | 4 Lifting rings                                  | A-22, F-21                     | LVS08765  | Set of 2 side panels D600                                                         | A-7, A-23, F-20, I-7        |
| LVS08701 | Stabiliser kit                                   | A-22, F-21                     | LVS08765D | PrismaSeT P Active Green Cover + Wireless Panel Server W400 + lateral panels D600 | A-7, A-23, F-18, F-20       |
| LVS08702 | Levelling kit                                    | A-22, F-21                     | LVS08766D | PrismaSeT P Active Green Cover + Wireless Panel Server W650 + lateral panels D600 | A-7, A-23, F-18, F-20       |
| LVS08703 | False floor fixing kit                           | A-22, F-21                     | LVS08767D | PrismaSeT P Active Green Cover + Wireless Panel Server W800 + lateral panels D600 | A-7, A-23, F-4, F-18, F-20  |
| LVS08704 | Floor/wall fixing kit                            | A-22, F-21                     | LVS08773  | 4 Cable tie supports W300                                                         | A-23, F-20, F-28            |
| LVS08706 | Handl. Plinth lh. 2000->2550                     | F-20, J-13                     | LVS08774  | 4 Cable tie supports W400                                                         | A-7, A-23, E-13, F-20, F-28 |
| LVS08710 | Reinforcement bracket PrismaSeT P Active seismic | A-22, F-20                     | LVS08776  | 4 Cable tie supports W650                                                         | A-23, F-28                  |
| LVS08711 | IP31 sealing kit                                 | F-15                           |           |                                                                                   |                             |
| LVS08714 | 2 Side parts handl.Plinth D400                   | A-7, A-22, F-20, J-13          |           |                                                                                   |                             |
| LVS08716 | 2 Side parts handl.Plinth D600                   | A-7, A-22, F-20, J-13          |           |                                                                                   |                             |
| LVS08717 | Side/side combi.IP55 seal.Kit                    | F-4, F-6                       |           |                                                                                   |                             |
| LVS08718 | 10 Combination screws+acc.                       | F-6                            |           |                                                                                   |                             |
| LVS08719 | Double depth combination kit                     | F-3, F-4, F-6                  |           |                                                                                   |                             |
| LVS08720 | 2 Side plates for plinth D400                    | F-19                           |           |                                                                                   |                             |
| LVS08721 | 2 Side plates for plinth D600                    | F-19                           |           |                                                                                   |                             |



## Index Of Commercial References With Description

| Com. no.     | Description                              | Page                              | Com. no.     | Description                                          | Page |
|--------------|------------------------------------------|-----------------------------------|--------------|------------------------------------------------------|------|
| LVS08778     | 4 Cable tie supports W800                | A-23, F-28                        | 14813        | 3P comb busbar 27mm spacing                          | G-30 |
| LVS08783     | Form c cable tie sup. L1600              | A-23, F-28                        | 14814        | 4P comb busbar 27mm spacing                          | G-30 |
| LVS08794     | 4 Cable tie supports D400                | A-7, A-23, E-13, E-19, F-26, F-28 | 14818        | End caps and tooth caps                              | G-30 |
| LVS08796     | 4 Cable tie supports D600                | A-7, A-23, F-28                   | 14885        | 4 Insulated connectors                               | G-30 |
| LVS08900     | Switchboard identification pl.           | A-23, F-22                        | <b>19...</b> |                                                      |      |
| LVS08903     | 12 adhesive label holders 24x432         | A-23, F-22                        | 19512        | Comb busbar ph and n 18poles                         | G-33 |
| LVS08904     | 12 adhesive label holders 36x432         | A-23, F-22                        | 19516        | Comb busbar 3P and n 18poles                         | G-33 |
| LVS08905     | 12 adhesive label holders 24x180 W300    | A-23, F-22                        | <b>21...</b> |                                                      |      |
| LVS08906     | 12 adhesive label holders 36x180 W300    | A-23, F-22                        | 21089        | Comb busbar 1P and n 48poles                         | G-33 |
| LVS08910     | Earthing braid 6mm <sup>2</sup>          | A-23, F-22, F-29                  | 21093        | Comb busbar 3P and n 48poles                         | G-33 |
| LVS08911     | Earthing wire 6mm <sup>2</sup>           | A-23, F-22, F-29                  | 21094        | 40 End covers/comb busbar 1P and n                   | G-33 |
| LVS08913     | 12 clip-on labels 18x35                  | A-23, F-22                        | 21095        | 40 End covers/comb busbar 3P and n                   | G-33 |
| LVS08914     | 12 engraving plates 18x35 /support 08913 | A-23, F-22                        | 21096        | 12 Tooth-caps 3Poles                                 | G-33 |
| LVS08915     | 12 clip-on labels 18x72                  | A-23, F-22                        | 21098        | 4 Connectors 25mm <sup>2</sup>                       | G-33 |
| LVS08916     | 12 engraving plates 18x72 /support 08915 | A-23, F-22                        | 21501        | Comb busbar ph and n 12Poles                         | G-33 |
| LVS08917     | 12 clip-on labels 25x85                  | A-23, F-22                        | 21503        | Comb busbar ph and n 24Poles                         | G-33 |
| LVS08918     | 12 engraving plates 25x85 /support 08917 | A-23, F-22                        | 21505        | Comb busbar 3P and n 12Poles                         | G-33 |
| LVS08921     | 20 Framework screws+wing nuts            | F-6                               | 21507        | Comb busbar 3P and n 24Poles                         | G-33 |
| LVS08961     | Touch-up paint brush                     | A-23, F-22                        | <b>29...</b> |                                                      |      |
| LVS08963     | Adhesive drawing holder                  | A-23, F-22                        | 29504        | 3 Bimetallic lugs for alu cable 150mm <sup>2</sup> a | I-46 |
| LVS08964     | Switchboard lighting Syst G              | F-35                              | 29505        | 4 Bimetallic lugs for alu cable 150mm <sup>2</sup> a | I-46 |
| LVS08965     | Switchboard portable lamp                | F-35                              | 29506        | 3 Bimetallic lugs for alu cable 185mm <sup>2</sup> a | I-46 |
| <b>10...</b> |                                          |                                   | 29507        | 4 Bimetallic lugs for alu cable 185mm <sup>2</sup> a | I-46 |
| 10387        | Comb busbar domae 1P 63 a l = 12 x 18 mm | G-35                              | <b>31...</b> |                                                      |      |
| 10388        | Comb busbar 1x10mm <sup>2</sup> 57 mod.  | G-35                              | 31073        | Mechanical interlock (INS250)                        | E-52 |
| 10389        | Comb busbar domae 2P 63 a l = 12 x 18 m. | G-35                              | 31074        | Mechanical interlock (INS320/630)                    | E-52 |
| 10390        | Comb busbar 2x10mm <sup>2</sup> 56 mod.  | G-35                              | 31140        | Manual sourcechangeover INS250 3P 100 a              | E-53 |
| 10391        | Comb busbar 3x10mm <sup>2</sup> 12 mod.  | G-35                              | 31141        | Manual sourcechangeover INS250 4P 100 a              | E-53 |
| 10392        | Comb busbar 3x10mm <sup>2</sup> 57 mod.  | G-35                              | 31142        | Manual sourcechangeover INS250 3P 200 a              | E-53 |
| 10393        | Comb busbar domae 4P 63 a l = 12 x 18 m. | G-35                              | 31143        | Manual sourcechangeover INS250 4P 200 a              | E-53 |
| 10394        | Comb busbar 4x10mm <sup>2</sup> 56 mod.  | G-35                              | 31144        | Manual sourcechangeover INS250 3P 160 a              | E-53 |
| 10395        | Comb busbar 4x16mm <sup>2</sup> 54 mod.  | G-35                              | 31145        | Manual sourcechangeover INS250 4P 160 a              | E-53 |
| 10396        | 10 Tooth cover                           | G-35                              | 31146        | Manual sourcechangeover INS250 3P 250 a              | E-53 |
| 10397        | 4 Connector 35mm                         | G-35                              | 31147        | Manual sourcechangeover INS250 4P 250 a              | E-53 |
| 10398        | 10 Endcover for busbars 2 phases         | G-35                              | 31148        | Manual sourcechangeover INS320 3P 320 a              | E-53 |
| 10399        | 10 Endcover for busbars 3 phases         | G-35                              | 31149        | Manual sourcechangeover INS320 4P 320 a              | E-53 |
| 10405        | 10 Endcover for busbars 4 phases         | G-33, G-35                        | 31150        | Manual sourcechangeover INS400 3P 400 a              | E-53 |
| 10545        | Comb busbar 12 modules C60 clario        | G-33                              | 31151        | Manual sourcechangeover INS400 4P 400 a              | E-53 |
| 10546        | Comb busbar 48 modules C60 clario left   | G-33                              | 31152        | Manual sourcechangeover INS500 3P 500 a              | E-53 |
| 10547        | Comb busbar 48 modules C60 clario right  | G-33                              | 31153        | Manual sourcechangeover INS500 4P 500 a              | E-53 |
| <b>13...</b> |                                          |                                   | 31154        | Manual sourcechangeover INS630 3P 630 a              | E-53 |
| 13735        | Lot of 10 standard symbols labels        | A-23, F-22                        | 31155        | Manual sourcechangeover INS630 4P 630 a              | E-53 |
| 13736        | Lot of 10 special symbols labels         | A-23, F-22                        | 31301        | Additional cable lug adapters 3P INS/INV             | E-39 |
| <b>14...</b> |                                          |                                   |              |                                                      |      |
| 14811        | 1P comb busbar 27mm spacing              | G-30                              |              |                                                      |      |
| 14812        | 2P comb busbar 27mm spacing              | G-30                              |              |                                                      |      |

## Index Of Commercial References With Description

A

| Com. no.     | Description                                          | Page                                     |
|--------------|------------------------------------------------------|------------------------------------------|
| 31302        | Additional cable lug adapters 4P INS/INV             | E-39                                     |
| <b>32...</b> |                                                      |                                          |
| 32504        | 3 Bimetallic lugs for alu cable 240mm <sup>2</sup> a | I-46                                     |
| 32505        | 4 Bimetallic lugs for alu cable 185mm <sup>2</sup> a | I-46                                     |
| 32506        | 3 Bimetallic lugs for alu cable 300mm <sup>2</sup> a | I-46                                     |
| 32507        | 4 Bimetallic lugs for alu cable 300mm <sup>2</sup> a | I-46                                     |
| <b>33...</b> |                                                      |                                          |
| 33596        | 3P arc chute insulating screen                       | E-15, E-17, E-19                         |
| 33597        | 4P arc chute insulating screen                       | E-15, E-17, E-19                         |
| 33628        | Terminal shield 3P                                   | E-49                                     |
| 33629        | Terminal shield 4P                                   | E-49                                     |
| 33642        | Kit 3P vertical connection adapters                  | E-10, E-13, E-15, E-19, I-47, I-48       |
| 33643        | Kit 4P vertical connection adapters                  | E-10, E-15, E-19, I-46, I-48             |
| 33644        | 3P cable lug adapter kit                             | E-10, E-13, E-15, E-19, E-39, I-46, I-48 |
| 33645        | 4P cable lug adapter kit                             | E-10, E-15, E-19, E-39                   |
| 33890        | Interlocking kit for 2 breakers with rot             | E-49                                     |
| 33975        | Connection 3P for NS1600/3200A                       | E-14, E-39                               |
| 33976        | Connection 4P for NS1600/3200A                       | E-14, E-39                               |
| <b>47...</b> |                                                      |                                          |
| 47335        | Arc chute insulating screen for 3P fixed             | E-10, E-11, E-13                         |
| 47336        | Arc chute insulating screen for 4P fixed             | E-10, E-11                               |
| <b>49...</b> |                                                      |                                          |
| 49860        | ISFT100 3P multi bare cable connector                | E-57                                     |
| 49861        | ISFT 100 3P feeding busbar for 2 switch              | E-57                                     |
| 49862        | ISFT 100 3P feeding busbar for 3 switch              | E-57                                     |
| 49863        | ISFT 100 3P feeding busbar for 4 switch              | E-57                                     |
| 49865        | ISFT 100 3P feeding clamp for feeding bu             | E-57                                     |
| <b>A...</b>  |                                                      |                                          |
| A9N21035     | Comb busbar 1P-n 63a 56mod.                          | G-34                                     |
| A9N21036     | Comb busbar 3P-n repart. 63a 56mod.                  | G-34                                     |
| A9N21037     | Comb busbar 1P-n Vigi 63a 56mod.                     | G-34                                     |
| A9N21038     | Comb busbar 3P-n Vigi repart. 63a 56mod.             | G-34                                     |
| A9N21039     | Set of 20 end caps 1P-n                              | G-34                                     |
| A9N21040     | Set of 20 end caps 3P-n                              | G-34                                     |
| A9N21041     | Set of 10 phase connectors                           | G-34                                     |
| A9N21042     | Set of 10 neutral connectors                         | G-34                                     |
| A9N21050     | Set of 10 tooth caps                                 | G-34                                     |
| A9XAH157     | Acti 9 comb busbar AUX1P 100A 57 modules             | G-31                                     |
| A9XAH257     | Acti 9 comb busbar aux2P 100A 57 modules             | G-31                                     |

| Com. no.    | Description                                           | Page       |
|-------------|-------------------------------------------------------|------------|
| A9XAH357    | Acti 9 comb busbar aux3P 100A 57 modules              | G-31       |
| A9XAH457    | Comb busbar aux4P 100A 57mod.                         | G-31       |
| A9XAH657    | Comb busbar aux3P repart. 100A 57mod.                 | G-31       |
| A9XPCD04    | Acti 9 set of 4 connectors                            | G-31, G-32 |
| A9XPCM04    | Acti 9 set of 4 connectors                            | G-31, G-32 |
| A9XPE110    | Acti 9 set of 10 end caps 1P                          | G-31       |
| A9XPE210    | Acti 9 set of 10 end caps 2P                          | G-31       |
| A9XPE310    | Acti 9 set of 10 end caps 3P                          | G-31       |
| A9XPE410    | Acti 9 set of 10 end caps 4P                          | G-31       |
| A9XPH106    | Acti 9 comb busbar 1P 100A 6 modules                  | G-31       |
| A9XPH112    | Acti 9 comb busbar 1P 100A 12 modules                 | G-31       |
| A9XPH124    | Acti 9 comb busbar 1P 100A 24 modules                 | G-31       |
| A9XPH157    | Acti 9 comb busbar 1P 100A 57 modules                 | G-31       |
| A9XPH212    | Acti 9 comb busbar 2P 100A 12 modules                 | G-31       |
| A9XPH224    | Acti 9 comb busbar 2P 100A 24 modules                 | G-31       |
| A9XPH257    | Acti 9 comb busbar 2P 100A 57 modules                 | G-31       |
| A9XPH312    | Acti 9 comb busbar 3P 100A 12 modules                 | G-31       |
| A9XPH324    | Acti 9 comb busbar 3P 100A 24 modules                 | G-31       |
| A9XPH357    | Acti 9 comb busbar 3P 100A 57 modules                 | G-31       |
| A9XPH412    | Comb busbar 4P 100A 12mod.                            | G-31       |
| A9XPH424    | Acti 9 comb busbar 4P 100A 24 modules                 | G-31       |
| A9XPH457    | Acti 9 comb busbar 4P 100A 57 modules                 | G-31       |
| A9XPM212    | Comb busbar 2P 100A 12mod.                            | G-32       |
| A9XPM412    | Comb busbar 4P 100A 12mod.                            | G-32       |
| A9XPT920    | Set of 20 tooth caps                                  | G-31, G-32 |
| <b>D...</b> |                                                       |            |
| DZ5CA005    | Cable end 0,5                                         | G-43       |
| DZ5CA007    | Cable end insulated markable, 0,75mm <sup>2</sup> , m | G-43       |
| DZ5CA010    | Cable end insulated markable, 1mm <sup>2</sup> , medi | G-43       |
| DZ5CA015    | Cable ends                                            | G-43       |
| DZ5CA025    | Cable end insulated markable, 2,5mm <sup>2</sup> , me | G-43       |
| DZ5CA042    | Cable end insulated for clip-in marker,               | G-43       |
| DZ5CA062    | Cable end insulated for clip-in marker,               | G-43       |
| DZ5CA102    | Cable end insulated for clip-in marker,               | G-43       |
| DZ5CA162    | Cable end insulated for clip-in marker,               | G-43       |
| DZ5CA253    | Cable end insulated for clip-in marker,               | G-43       |
| DZ5CA352    | Cable end 35mm <sup>2</sup> -                         | G-43       |
| DZ5CA502    | Cable end 50mm <sup>2</sup> -                         | G-43       |
| DZ5CE005    | Cable end insulated, 0,5mm <sup>2</sup> , medium size | G-43       |
| DZ5CE007    | Cable end insulated, 0,75mm <sup>2</sup> , medium siz | G-43       |
| DZ5CE010    | Cable ends                                            | G-43       |
| DZ5CE015    | Cable ends                                            | G-43       |
| DZ5CE025    | Cable ends                                            | G-43       |
| DZ5CE042    | Cable ends                                            | G-43       |
| DZ5CE062    | Cable ends                                            | G-43       |

## Index Of Commercial References With Description

| Com. no.    | Description                                                          | Page                                                                                | Com. no. | Description                              | Page                                                                                                  |
|-------------|----------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| DZ5CE102    | Cable end insulated for clip-in marker,                              | <b>G-43</b>                                                                         | LV429517 | 1 3P long terminal shield                | <b>E-20, E-21, E-22, E-23, E-24, E-29, E-30, E-31, E-32, E-33, E-34, E-50, E-51</b>                   |
| DZ5CE162    | Cable end insulated for clip-in marker,                              | <b>G-43</b>                                                                         | LV429518 | 1 4P long terminal shield                | <b>E-20, E-21, E-22, E-23, E-24, E-29, E-30, E-31, E-32, E-33, E-34, E-40, E-50, E-51, E-52, E-53</b> |
| DZ5CE252    | Cable end insulated for clip-in marker,                              | <b>G-43</b>                                                                         | LV432475 | 2 Short rear connections                 | <b>E-20, E-21, E-25, E-26, E-40 E-22, E-23, E-24, E-27, E-28, E-29, E-30</b>                          |
| DZ5CE352    | Cable end insulated for clip-in marker,                              | <b>G-43</b>                                                                         | LV432476 | 2 Long rear connections                  | <b>E-20, E-21, E-22, E-23, E-24, E-25, E-26, E-27, E-28, E-29, E-30, E-40</b>                         |
| DZ5CE502    | Cable end insulated for clip-in marker,                              | <b>G-43</b>                                                                         | LV432516 | 3P plug-in base                          | <b>E-40</b>                                                                                           |
| <b>G</b>    |                                                                      |                                                                                     | LV432534 | Escutcheon collar for toggle             | <b>E-24, E-29 E-30</b>                                                                                |
| GS1AP33     | Terminal protection shrouds, TeSys GS, for 3-pole switches 100-160 A | <b>E-58</b>                                                                         | LV432584 | 1 Connections adapter 3P for plug in bas | <b>E-21, E-23, E-24, E-28, E-29, E-30</b>                                                             |
| GS1AP34     | Terminal protection shrouds, TeSys GS, for 4-pole switches 100-160 A | <b>E-58</b>                                                                         | LV432585 | 1 Connections adapter 4P for plug in bas | <b>E-21, E-23, E-24, E-26, E-28, E-29, E-30</b>                                                       |
| GS1AP43     | Terminal protection shrouds, TeSys GS, for 3-pole switches 160-400 A | <b>E-58</b>                                                                         | LV432591 | 1 3P short terminal shield               | <b>E-20, E-21, E-23, E-24, E-25, E-26, E-27, E-28, E-29, E-30, E-50, E-51</b>                         |
| GS1AP44     | Terminal protection shrouds, TeSys GS, for 4-pole switches 160-400 A | <b>E-58</b>                                                                         | LV432592 | 1 4P short terminal shield               | <b>E-20, E-21, E-22, E-23, E-24, E-25, E-26, E-27, E-28, E-29, E-30, E-40, E-50, E-51</b>             |
| <b>L...</b> |                                                                      |                                                                                     | LV432593 | 1 3P long terminal shield                | <b>E-20, E-21, E-22, E-23, E-24, E-25, E-26, E-27, E-28, E-29, E-30, E-40, E-50, E-51</b>             |
| LGY4193     | Linergy BS rear busbar support 630A                                  | <b>G-9</b>                                                                          | LV432594 | 1 4P long terminal shield                | <b>E-20, E-21, E-22, E-23, E-24, E-25, E-26, E-27, E-28, E-29, E-30, E-40, E-50, E-51, E-52, E-53</b> |
| LV426912    | Long terminal shield 3P iec/ul dis                                   | <b>E-35, E-36</b>                                                                   | LV432595 | 1 3P long terminal shield for spreader   | <b>E-50, E-51</b>                                                                                     |
| LV426913    | Long terminal shield 4P iec/ul dis and v                             | <b>E-35, E-36</b>                                                                   | LV432596 | 1 4P long terminal shield for spreader   | <b>E-50, E-51</b>                                                                                     |
| LV429235    | 2 Short rear connections                                             | <b>E-20, E-21, E-31, E-32, E-40 E-22, E-23, E-24, E-29, E-30, E-33, E-34</b>        | LV432619 | Accessory for sourcechangeover switch do | <b>E-50, E-51</b>                                                                                     |
| LV429236    | 2 Long rear connections                                              | <b>E-20, E-21, E-22, E-23, E-24, E-29, E-30, E-31, E-32, E-33, E-34, E-40</b>       | LV432620 | Accessory for sourcechangeover switch do | <b>E-50, E-51, E-52, E-53</b>                                                                         |
| LV429284    | Escutcheon collar for toggle                                         | <b>E-24, E-29</b>                                                                   | LV432621 | Rotary handle mechanical interlocking n  | <b>E-50</b>                                                                                           |
| LV429285    | Escutcheon collar for Vigi chassis ns                                | <b>E-22, E-23, E-24, E-27, E-28, E-29, E-34</b>                                     | LV480756 | Terminal covers x2                       | <b>E-57</b>                                                                                           |
| LV429286    | Chassis locking kit                                                  | <b>E-24</b>                                                                         |          |                                          |                                                                                                       |
| LV429306    | 1 Connections adapter 3P for plug in bas                             | <b>E-21, E-23, E-24, E-29, E-30, E-32, E-34</b>                                     |          |                                          |                                                                                                       |
| LV429307    | 1 Connections adapter 4P for plug in bas                             | <b>E-21, E-23, E-24, E-29, E-30, E-32, E-34</b>                                     |          |                                          |                                                                                                       |
| LV429316    | IP40 escutcheon for Vigi module                                      | <b>E-27, E-28, E-33, E-34</b>                                                       |          |                                          |                                                                                                       |
| LV429358    | Accessory for sourcechangeover switch do                             | <b>E-50, E-51</b>                                                                   |          |                                          |                                                                                                       |
| LV429359    | Accessory for sourcechangeover switch do                             | <b>E-50, E-51, E-52, E-53</b>                                                       |          |                                          |                                                                                                       |
| LV429369    | Mechanical interlocking for 2 rot handle                             | <b>E-50</b>                                                                         |          |                                          |                                                                                                       |
| LV429515    | 1 3P short terminal shield                                           | <b>E-20, E-21, E-22, E-23, E-24, E-29, E-30, E-31, E-32, E-33, E-34, E-50, E-51</b> |          |                                          |                                                                                                       |
| LV429516    | 1 4P short terminal shield                                           | <b>E-20, E-21, E-22, E-23, E-24, E-29, E-30, E-31, E-32, E-33, E-34, E-50, E-51</b> |          |                                          |                                                                                                       |

## Index Of Commercial References With Description

| Com. no.         | Description                                                | Page       | Com. no.         | Description                  | Page             |
|------------------|------------------------------------------------------------|------------|------------------|------------------------------|------------------|
| LV480811         | ISFT160 feeding busbar for 2 devices                       | E-57       | NSY CVF85M230PF  | Filterfan 85m3/h 230V IP54   | F-30             |
| LV480812         | ISFT160 feeding busbar for 3 devices                       | E-57       | NSY CVF165M230PF | Filterfan 165m3/h 230V IP54  | F-30             |
| LV480813         | ISFT160 feeding busbar for 4 devices                       | E-57       | NSY CVF300M230PF | Filterfan 300m3/h 230V IP54  | F-30             |
| LV480814         | ISFT160 distribution con 3 x 16mm                          | E-57       | NSY CVF560M230PF | Filterfan 560m3/h 230V IP54  | F-30, F-31       |
| LV480818         | ISFT160 feeding clamp 25 - 95mm <sup>2</sup>               | E-57       | NSY CVF575M230MB | Top hood roof with filterfan | E-59, F-32       |
| LV480819         | ISFT160 terminal shields                                   | E-57       | NSY CVF850M230PF | Filterfan 850m3/h 230V IP54  | E-59, F-30, F-31 |
| LV480824         | ISFT250 terminal shields                                   | E-57       |                  |                              |                  |
| LV480827         | ISFT400terminal shields                                    | E-57       |                  |                              |                  |
| LV480831         | ISFT630 terminal shields                                   | E-57       |                  |                              |                  |
| LV480854         | Kit for direct mounting 185mm                              | E-56       |                  |                              |                  |
| LV480868         | Sideframe door cut out - 850 mm                            |            |                  |                              |                  |
| LV480869         | Sidewise angle bracket for side frame                      | E-56       |                  |                              |                  |
| LV480870         | Lenght adaptor and ident. Label holder                     | E-56       |                  |                              |                  |
| <b>N...</b>      |                                                            |            |                  |                              |                  |
| NSYCAC228RMB     | Top hood roof with filterfan                               | E-59, F-32 |                  |                              |                  |
| NSYCAF92         |                                                            | F-30       |                  |                              |                  |
| NSYCAF125        | Filter std G2 cut-out.125X125mm                            | F-30       |                  |                              |                  |
| NSYCAF125T       | Fine filter G3 cut-out 125x125mm                           | F-30       |                  |                              |                  |
| NSYCAF223        | Filter std G2 cut-out.223X223mm                            | F-30       |                  |                              |                  |
| NSYCAF223T       | Fine filter G3 cut-out 223x223mm                           | F-30       |                  |                              |                  |
| NSYCAF228R       | Filter for roof o.Grid 228x228mm                           | E-59       |                  |                              |                  |
| NSYCAF291        | Filter std G2 cut-out.291X291mm                            | F-30       |                  |                              |                  |
| NSYCAF291T       | Fine filter G3 cut-out 291x291mm                           | F-30       |                  |                              |                  |
| NSYCAG92LPPF     | outlet grille plast cut out 92x92mm ext dim 137x117mm IP54 | F-30       |                  |                              |                  |
| NSYCAG125LPPF    | Outlet grid cut-out 125x125mm                              | F-30       |                  |                              |                  |
| NSYCAG223LPPF    | Outlet grid cut-out 223x223mm                              | F-30       |                  |                              |                  |
| NSYCAG291LPPF    | Outlet grid cut-out 291x29mm                               | E-59, F-30 |                  |                              |                  |
| NSYCAP125LE      | Emc cover IP55 cut-out 125x125mm                           | F-30       |                  |                              |                  |
| NSYCAP223LE      | Emc cover IP55 cut-out 223x223mm                           | F-30       |                  |                              |                  |
| NSYCAP291LE      | Emc cover IP55 cut-out 291x291mm                           | F-30       |                  |                              |                  |
| NSYCCASTE        | Temperature sensor l=3m                                    | F-34       |                  |                              |                  |
| NSY CCOHY230VID  | Electronical hygrostat% hr 230V                            | F-34       |                  |                              |                  |
| NSY CCOHYT230VID | Hygrotherm 230V                                            | F-34       |                  |                              |                  |
| NSY CCOTH230VID  | Electronical thermostat 230V                               | F-34       |                  |                              |                  |
| NSYCCOTH         | Double thermostat(no nc) (°C)                              | F-34       |                  |                              |                  |
| NSYCCOTHI        | Thermostat w/invers contact (°C)                           | F-34       |                  |                              |                  |
| NSYCR10WU2       | Resist.Heateralum 10w, 110-250v                            | F-33       |                  |                              |                  |
| NSYCR20WU2       | Resist.Heateralum 20w, 110-250v                            | F-33       |                  |                              |                  |
| NSYCR55WU2       | Resist.Heateralum 55w, 110-250v                            | F-33       |                  |                              |                  |
| NSYCR100WU2      | Heating resistor 110-250v 100w nsy-cr100w                  | F-33       |                  |                              |                  |
| NSYCR150WU2      | Resist.Heateralum 150w,110-250v                            | F-33       |                  |                              |                  |
| NSY CR250W230VV  | Resis.Ventil.250W ,230V alum                               | F-33       |                  |                              |                  |
| NSY CR400W230VV  | Resis.Ventil. 400W 230V alum                               | F-33       |                  |                              |                  |
| NSY CRP1W230VTVC | Thermoventil.Heat.350-550W 230V                            | F-33       |                  |                              |                  |
| NSY CVF38M230PF  | Filterfan 38m3/h 230V IP54                                 | F-30       |                  |                              |                  |

# Overview



## Contents

|                                                                                     |      |
|-------------------------------------------------------------------------------------|------|
| PrismaSeT P Active - Reliable, Easily connected                                     | B-2  |
| EcoStruxure™ Facility Expert - Cloud software to improve operations efficiency      | B-4  |
| Wireless Sensor for Early Detection of Overheating Cables                           | B-11 |
| PrismaSeT G Pack 160 - 250 enclosures up to 630 A - IP30, IP40, IP41, IP43, IP55    | B-14 |
| PrismaSeT P Active cubicles up to 4000 A - IP30, IP31, IP55                         | B-15 |
| The switchboard, central to the electrical installation                             | B-16 |
| Original Manufacturer and Assembly Manufacturer: Both involved in tested assemblies | B-17 |
| The main 10 functions of standard IEC 61439                                         | B-18 |
| Develop your business efficiency with our functional LV systems                     | B-20 |
| Electrical switchboards up to 4000 A                                                | B-22 |
| PrismaSeT 6300 - LV Switchboards for harsh environments up to 4000 A                | B-24 |
| Solutions for continuity of service in electrical installations with PrismaSeT      | B-25 |
| Linergy offers you smart power network solutions for your switchboard.              | B-26 |
| Secure power distribution and monitoring solution for operating theatres            | B-28 |

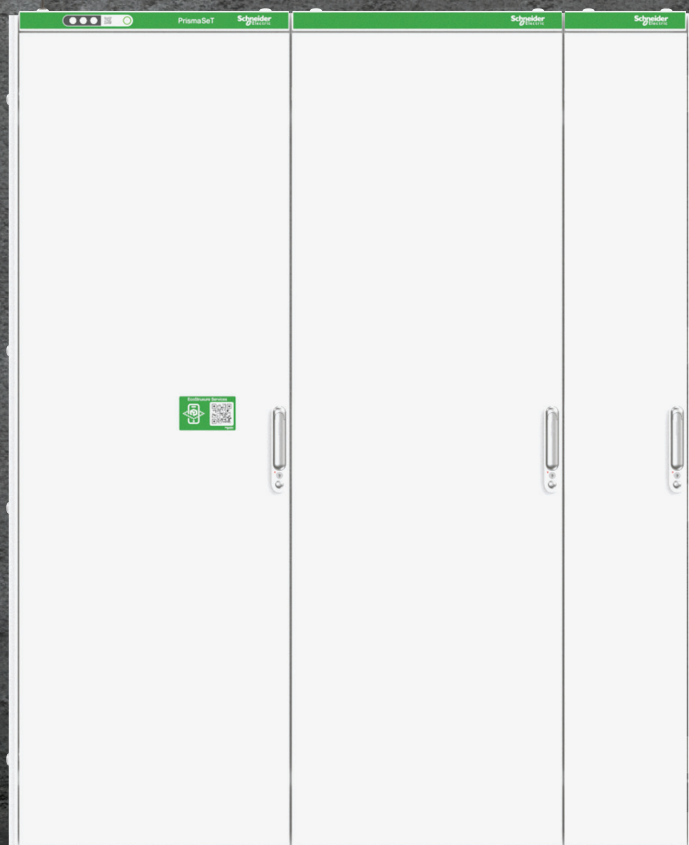


# PrismaSeT P Active - Reliable, Easily connected

The new PrismaSeT P Active switchboard is the market forerunner with built-in cloud connectivity, allowing instant access to smart alarm system, energy usage analysis, trends, and preventative maintenance plans. Built-in cloud connectivity allows users to be notified of the round-the-clock electrical distribution as well as voltage loss if any. This maximizes efficiency and power availability, while creating the basis for future innovations. The PrismaSeT P Active switchboard also allows easy wireless integration of sensors.

## Offer values

-  **Simplicity**
  - Deliver connectivity without any complexity
-  **Easy installation**
  - Simple-to-install connected solution
-  **Robustness and Design**
  - New design with new structure color, increased frame and door robustness
-  **Win more business**
  - Increase the service business opportunities while offering an affordable connected panel
-  **Protection**
  - Deliver greater peace of mind



## Digital journey



### Peace of mind on the Cloud

- Electrical Fire Prevention
- Power availability at no cost
- Energy awareness



### Built-in connectivity

- Voltage loss alert free of charge
- Connection to cloud in less than 5 min without any IT skill



### Easy-to-install 100% wireless communication solutions

- User friendly installation instructions
- Independent from customer IT



### Easy installation and commissioning

- Less than 30 minutes for setting up the communication devices



# PrismaSeT P Active - Reliable, Easily connected

## New design with sustainable packaging

Enhance buildings with in-built connectivity and efficient design

The new design of PrismaSeT P Active increases the robustness of the panels, helps to gain efficiency on every level and provides peace of mind to the panel builders, electrical contractors and facility managers.

In addition, the new 100% green packaging decreases the quantity of waste and its disposal cost by using only cartons.

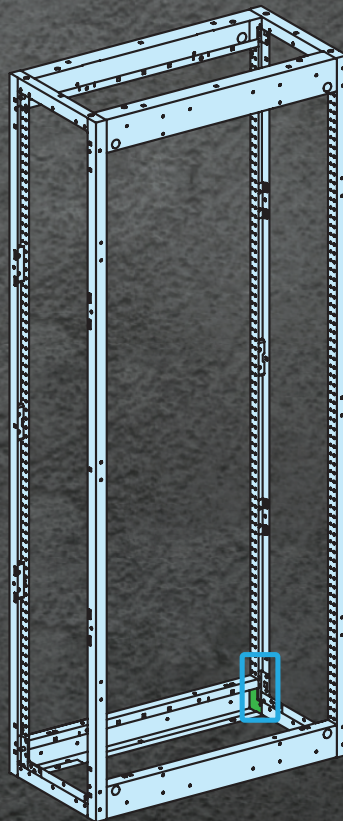
### Green Packaging

- Progressive cancellation of plastic and polystyrene of packaging.
- 100% recyclable cardboards.
- Time & money saving to sort waste.
- New cross beam in cardboard for a more robust packaging.



### Reinforced Frame


- Easier transportation and perception during assembly.
- Reinforcement on the lower angle levels using additional accessories.



### Reinforced Plain Door

- 3 hinges
- Sheet metal thickness 1.5 mm
- 20 x 20 bar reinforcement

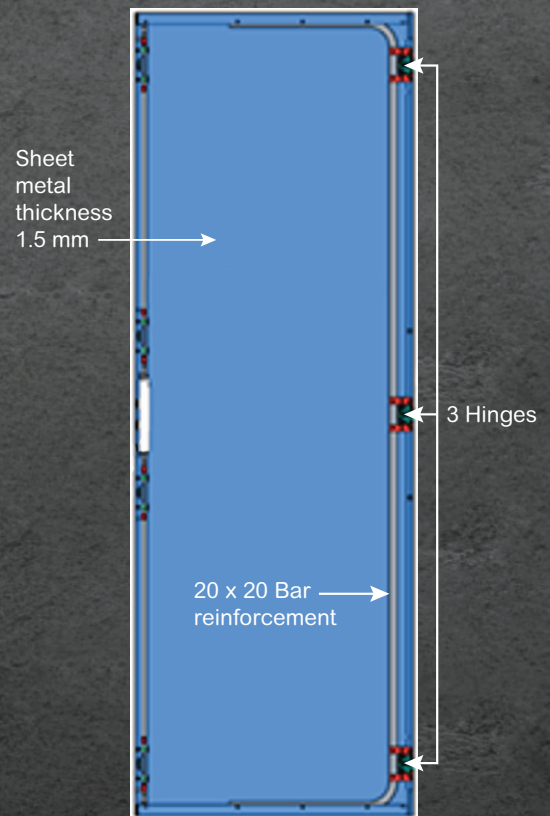IP 30/31 Plain Door



### New Improved Handle

- More robust handle.
- Keyless entry door.
- Ergonomic and Aesthetically handle design.



### Digital Instruction Sheets

- Cancellation of systematic printed instruction in each packaging.
- 1 printed 'Super Leaflet' with all instructions (available to order once).
- 1 systematic QR code to link to the right instruction sheets.





# EcoStruxure™ Facility Expert

## Cloud software to improve operations efficiency



### Mobility to improve maintenance & operations

#### Register easily and overview all your assets status

QR code ready, Schneider Electric devices are already configured to communicate with EcoStruxure™ Facility Expert in a simple way and enable automatic download of ID, technical documentation and maintenance plan.

Located on the map, visualize all assets in real time, navigate and filter by area or status.

#### Remain connected and Informed

Providing relevant information on critical assets, sending instant and documented alarms EcoStruxure™ Facility Expert allows to diagnose remotely in case of issue and to manage maintenance efficiently.

- Instant alarms on threshold and status change
- Real-time assets status and map localization.
- Maintenance plan, asset log history, asset doc repository.
- Task manager and task reminder.
- 1 click to edit intervention and activity reports including voice memos, notes, photos and measurements.
- Remain connected, comment, share information and get support in the field from colleagues or experts if needed.



### Web-application to monitor & analyze energy

EcoStruxure™ Facility Expert energy features give insights into energy data and provide visibility to reduce energy consumption.

On their web portal, Facility Managers get a clear vision on real time energy consumption for all managed buildings from any location.

- Main energy consumptions tracking (main, usage, zone, meter)
- Multi-site comparison capacity
- Cost monitoring
- Power demand and power factor monitoring
- Building performance: benchmarking against local energy performance scale (regulatory compliance to ISO50001, LEED, NABERS)
- Monthly score cards
- **Energy kiosk:** displayed on building public TV screens, this option shows your green image to visitors and promotes occupant ecofriendly behaviours.

### Schneider Electric partners network

Schneider Electric local partners are trained and certified to sell, install and commission EcoStruxure™ Facility Expert. They can also operate the solution if the site manager wants to delegate this task.

## For Commercial and Industrial application




- 1 Built-in wireless panel server
- 2 LED indicators: Phase status (on/off)
- 3 QR Code to activate your free alerts
- 4 EcoStruxure™ Facility Expert communication status indicator


- Service is activated on cloud-based software
- Service is not activated (blinking)



EcoStructure™ Facility Expert



Alert detail

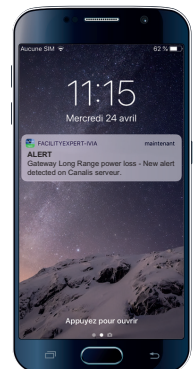

24/7 notifications on mobile devices

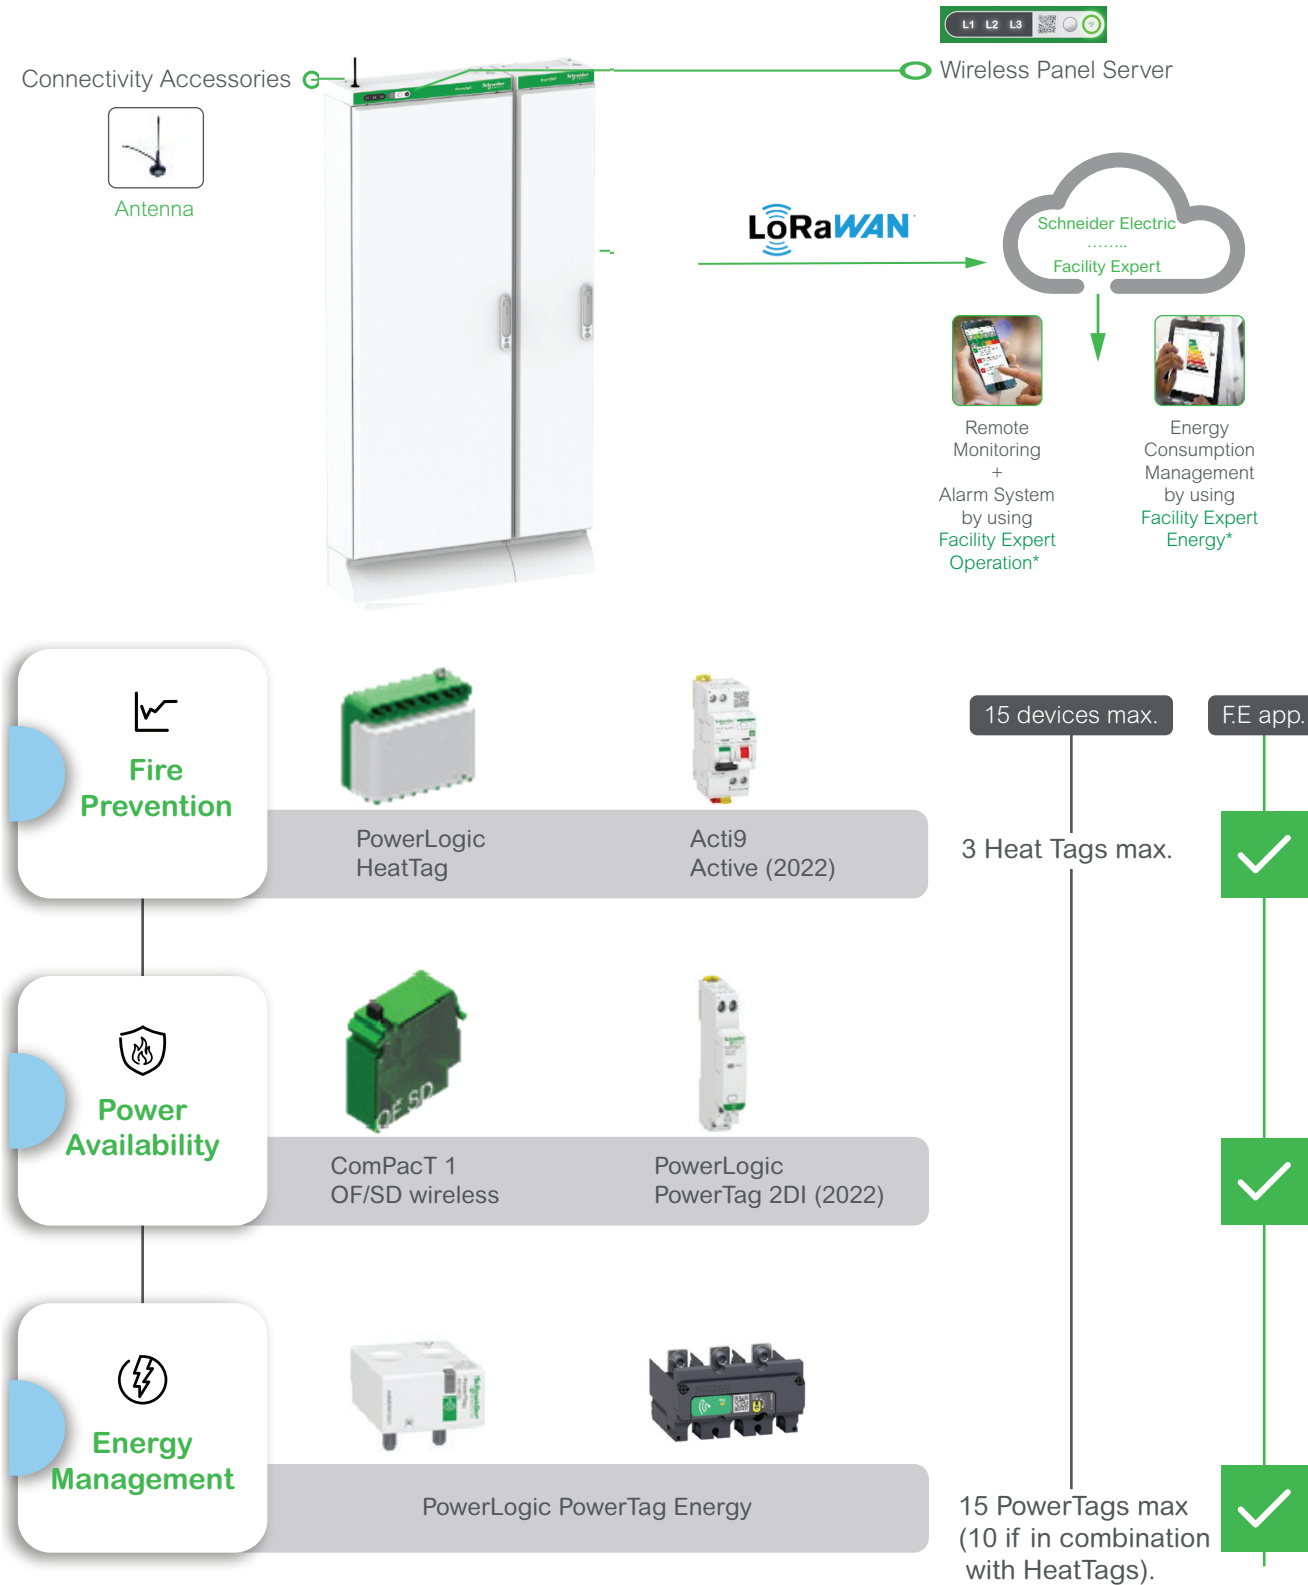
Note: The voltage presence indication of the Wireless Panel Server is only indicative and cannot replace all safety measures required before any intervention into the Low Voltage Switchboard



PrismaSeT Active wireless panel server installed into its environment



General Principle



\*Facility Expert Energy:  
It is a Cloud software for energy efficiency. The app generates alarms when the consumption exceeds set targets while monitoring the energy consumption 24/7 with comparison by site or usage.


\*Facility Expert Operation:  
It is a cloud software for operation efficiency that alerts the user to optimize the maintenance procedures.

### Main Features

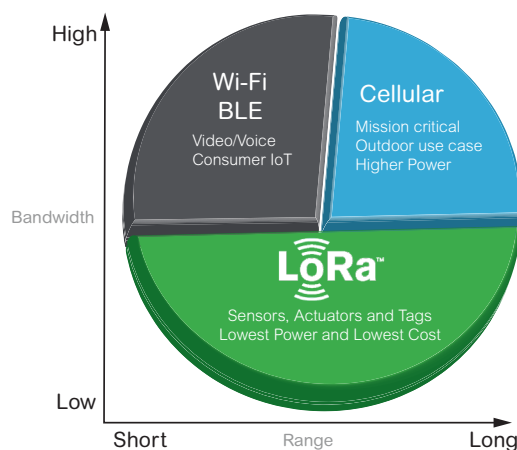LoRaWAN (Long Range Wide Area Network) is a networking protocol designed to connect wirelessly in order to assure end-to-end communication services.

The followings are the differentiating factors compared to other networking protocols:

- Long range coverage
- Low energy consumption
- Better penetration in buildings
- No SIM needed
- No additional fees to pay (included in Facility Expert subscription).



B



Simple 3-wire cable connections for ease of connectivity to Voltage Presence indicator.

QR code compatible for scanning through any device.

Free real time alarming in case of losing power.

Quick activation and subscription for the LoRa connection without paying any additional fees.

EcoStruxure Power Commission application simplifies sensor integration and commissioning (upto 15 Nos. under 30 mins).

Periodic report and updates.



|                                  | Name                                                           | Reference                        | Description                                                                            |
|----------------------------------|----------------------------------------------------------------|----------------------------------|----------------------------------------------------------------------------------------|
| Applications                     | EcoStruxure Power Commission App                               | For free Play store/ Apple store | Easy wireless Panel and sensors Configuration                                          |
|                                  | EcoStruxure Facility Expert App                                | For free Play store/ Apple store | Reactive maintenance and Energy Management                                             |
| Built-in Gateway                 | Wireless Panel Server built-in                                 | Check page F 15                  | Built in PrismaSeT P                                                                   |
| Alarming Sensors                 | HeatTag cable overheating sensor                               | SMT10020                         | Provide a proactive heating detection                                                  |
|                                  | ComPacT NSX OF/SD auxiliary contact wireless                   | LV429454                         | Redefine and enhance customer experience with seamless connectivity                    |
|                                  | ComPacT NSXm OF/SD auxiliary contact wireless                  | LV429453                         | Redefine and enhance customer experience with seamless connectivity                    |
|                                  | PowerTag C 2DI - 2 digital inputs 230 V for any default signal | A9XMC2D3                         | Provide a precise real time data on energy, currents, power, voltage and power factor. |
|                                  | Arc Fault Detection Device with wirelelss communication        | refer to Acti 9 catalog          | Prevent arc fault reaching temperatures which can ignite home fires                    |
| PowerTag Energy Metering Sensors | PowerTag Energy Monoconnect 63A 1P+Wire                        | A9MEM1520                        | Provide precise, real-time data on energy, currents, power, voltage, and power factor  |
|                                  | PowerTag Energy Monoconnect 63A 1P+N top                       | A9MEM1521                        |                                                                                        |
|                                  | PowerTag Energy Monoconnect 63A 1P+N bottom                    | A9MEM1522                        |                                                                                        |
|                                  | PowerTag Energy Monoconnect 63A 3P top and bottom              | A9MEM1540                        |                                                                                        |
|                                  | PowerTag Energy Monoconnect 63A 3P+N top                       | A9MEM1541                        |                                                                                        |
|                                  | PowerTag Energy Monoconnect 63A 3P+N bottom                    | A9MEM1542                        |                                                                                        |
|                                  | PowerTag Energy Flex 63A 1P+N top and bottom                   | A9MEM1560                        |                                                                                        |
|                                  | PowerTag Energy PhaseNeutral 63A 1P+N top                      | A9MEM1561                        |                                                                                        |
|                                  | PowerTag Energy PhaseNeutral 63A 1P+N bottom                   | A9MEM1562                        |                                                                                        |
|                                  | PowerTag Energy Flex 63A 3P+N top and bottom                   | A9MEM1570                        |                                                                                        |
|                                  | PowerTag Energy PhaseNeutral 63A 3P+N top                      | A9MEM1571                        |                                                                                        |
|                                  | PowerTag Energy PhaseNeutral 63A 3P+N bottom                   | A9MEM1572                        |                                                                                        |
|                                  | PowerTag Energy Flex 160A 3P/3P+N                              | A9MEM1580                        |                                                                                        |
|                                  | PowerTag Energy Monoconnect 250A 3P                            | LV434020                         |                                                                                        |
|                                  | PowerTag Energy Monoconnect 630A 3P                            | LV434022                         |                                                                                        |
|                                  | PowerTag Energy Monoconnect 250A 3P+N                          | LV434021                         |                                                                                        |
|                                  | PowerTag Energy Monoconnect 630A 3P+N                          | LV434023                         |                                                                                        |
|                                  | PowerTag Energy Rope 200A 3P/3P+N                              | A9MEM1590                        |                                                                                        |
|                                  | PowerTag Energy Rope 600A 3P/3P+N                              | A9MEM1591                        |                                                                                        |
|                                  | PowerTag Energy Rope 1000A 3P/3P+N                             | A9MEM1592                        |                                                                                        |
|                                  | PowerTag Energy Rope 2000A 3P/3P+N                             | A9MEM1593                        |                                                                                        |
| Communication Accessories        | LoRa additional length for Antenna - 5 m                       | SMT10011                         | Improve the reception infront of the panel (if needed)                                 |
|                                  | LoRa Tester                                                    | SMT10013                         | Test the signal before and after installation                                          |
|                                  | LoRa /IP Plug & Play Bridge via SIM Card                       | SMT10014                         | In case of no reception of LoRa public network on your site                            |

## PowerLogic™ HeatTag sensor installed with Prisma**SeT** P Active Panel server and paired with EcoStructure™ Facility Expert

Prisma**SeT** P Active

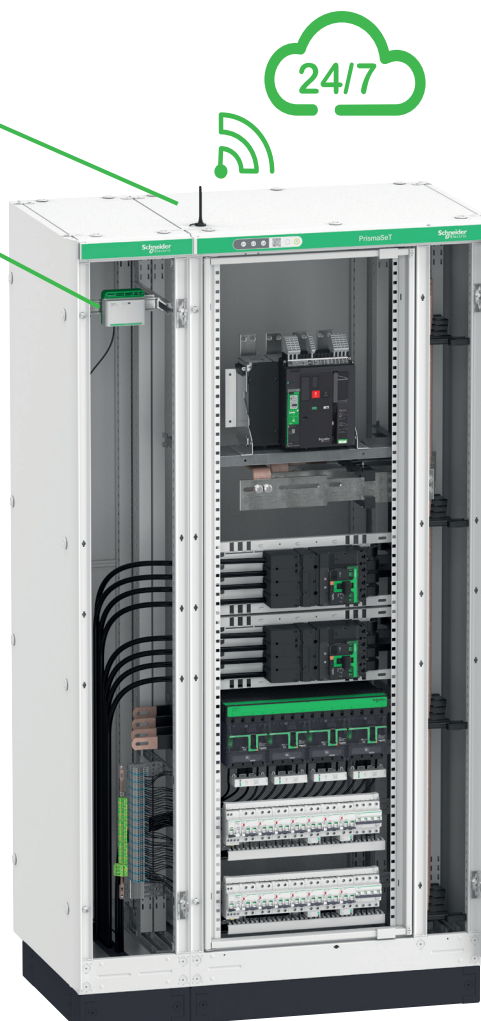
Wireless Panel Server

PowerLogic™ HeatTag sensor



Easy to install: directly on a DIN rail in non-forced air-ventilated switchboards.

Easy to commission from your mobile with EcoStructure™ Power Commission.




B




# PowerLogic™ HeatTag sensor installed with Prisma**SeT** P Active Panel server and paired with EcoStructure™ Facility Expert



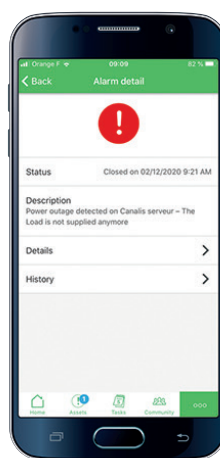EcoStructure™ Facility Expert



Alert detail

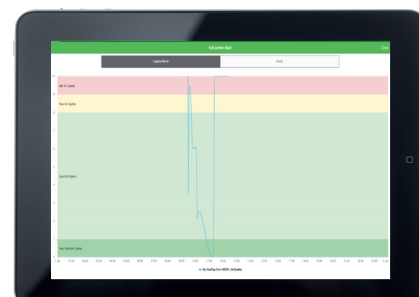

Cause and recommendations

# Wireless Sensor for Early Detection of Overheating Cables



SMT10020

HeatTag is a smart sensor for early detection of overheating wire connections or overheating cables. HeatTag helps prevent electrical switchboards from being damaged, by analyzing gas and particles in the air and sending alerts before any smoke or insulator browning.

## Standards

The HeatTag smart sensor complies with the following standards:

- IEC 61010-1:2017 UL/CSA/EU CENELEC deviations
- IEC/EN 61326-1b FCC Part 15B and 15C
- ETSI/EN 300328
- ETSI/EN 301489-1
- IEEE 802.15.4

### Note:

Do not use HeatTag as a safety device. HeatTag does not replace the fire protection devices of the building.

## Presentation

### HeatTag smart sensor:

- Sends three levels of alert depending on the severity of the situation it detects.
- Helps prevent potential fire damages by analyzing gas and micro-particles emitted by cable sheaths when overheating.
- Measures temperature and humidity.
- Communicates with all Schneider Electric EcoStruxure panel servers or gateways.
- Is integrated in EcoStruxure solutions.

The HeatTag sensor must be installed only in non-forced air ventilated switchboards. It must be mounted on a DIN rail.

During the first 30 minutes after commissioning, HeatTag can generate an alert for test. It then takes another 8 hours for HeatTag to define its nominal environment and to be fully operational. Each time the HeatTag sensor is powered on, these 30-minute and 8-hour sequences are repeated.

## Operation

### Paired with Schneider Electric panel servers or gateways, HeatTag reports:

- Alerts
- Air quality index
- Temperature and humidity measurement
- Self-diagnosis information

## Air Quality

HeatTag provides an air quality index, ranging from 0 to 10, and displays the air quality evolution trend in a table.

When the air quality index is equal or above 10, HeatTag sends an alert. It has detected abnormal cable sheath heating in the switchboard.

## Detection Alert

An alert is triggered when HeatTag detects abnormal cable sheath heating in the switchboard, which can be caused by:

- One or more loose connections (too high contact resistance)
- A poorly sized cable compared to the rated current
- Overcurrent and poorly regulated protective equipment

Alerts are triggered with three severity levels:

- Low level: a cable is slowly overheating in the installation, you must plan a maintenance visit of the installation.
- Medium level: a cable is overheating in the installation, you must go quickly to the installation for maintenance.
- High level: a cable overheats very quickly, you must check the installation immediately.

The orange application led flashes when HeatTag sends an alert to the panel servers or gateways.

## Temperature

HeatTag provides a temperature value with a 30 second default transmission period. The transmission period can be increased by the system in case of high wireless data traffic.

## Humidity

The HeatTag provides a humidity rate with a 30 second default transmission period. The transmission period can be increased by the system in case of high wireless data traffic.

## Self-Diagnosis

HeatTag carries out two types of diagnosis:

- A minor alert is sent when the fan rpm is 80% of its nominal rpm, which means fan clogging.
- A major alert is sent when HeatTag is faulty. In this case it cannot report measures at all, nor reports incorrect measures.

# Wireless Sensor for Early Detection of Overheating Cables

## HeatTag Smart Design

- No settings
- Nominal environment auto-learning to avoid false alerts
- Concentrator auto-discovery
- Alerts generated by a powerful algorithm integrated in HeatTag

## Electrical Characteristics

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| Supply voltage                    | 110-277 V AC, -15 % / +15 %       |
| Frequency                         | 50-60 Hz                          |
| Max. consumption                  | 0.1 A                             |
| Operating temperature             | -15 °C / +70 °C (5 °F to 158 °F)  |
| Storage temperature               | -20 °C / +85 °C (-4 °F to 185 °F) |
| Relative humidity in operation    | 15-90 %                           |
| Altitude of use                   | 0-2000 m (0-6500 ft)              |
| Degree of pollution (IEC 60664-1) | 3                                 |
| Overvoltage category              | OVC III                           |

## Sensor Characteristics

|                                 |                             |                                                           |
|---------------------------------|-----------------------------|-----------------------------------------------------------|
| Temperature measurement         | Measurement range           | -15 °C / +70 °C (5 °F to 158 °F)                          |
|                                 | Measurement accuracy        | -1.1 °C / +1.1 °C                                         |
|                                 | Default transmission period | 30 seconds (higher in case of high wireless data traffic) |
| Humidity measurement            | Measurement range           | 15-90 %                                                   |
|                                 | Measurement accuracy        | ±9 RH %                                                   |
|                                 | Default transmission period | 30 seconds (higher in case of high wireless data traffic) |
| Air quality                     |                             | Index (0 to 10), alert generation when index ≥ 10         |
| Test alert after pairing        |                             | During the first 30 minutes                               |
| Environment auto-learning phase |                             | 8 hours after the first 30 minutes                        |

## Installation


### Communication Architecture

List of compatible communicators:

- EcoStruxure Panel Servers
- PowerTag Link
- PrismaSeT Wireless Panel Server


### Wiring

HeatTag must be protected by 2 A breaker.  
It is delivered with a separate connector.



## Mechanical Characteristics
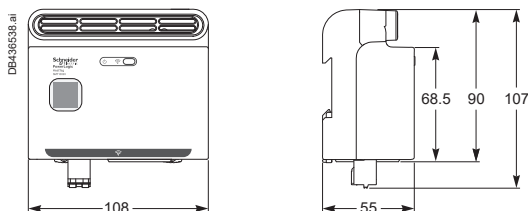
|                                  |                   |
|----------------------------------|-------------------|
| Dimensions (w x h x d)           | 108 x 107 x 55 mm |
| Weight                           | 270 g             |
| Degree of protection (IEC 60529) | IP30              |



# Wireless Sensor for Early Detection of Overheating Cables

## Integration in PrismaSeT P Active

HeatTag must be installed following the Instruction Sheet recommendations (MFR5173801).


DB437105.ai



MFR5173801


B

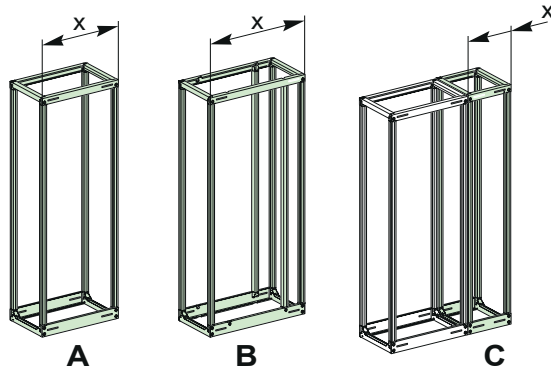DB437107.ai




HeatTag must be installed on a DIN rail.

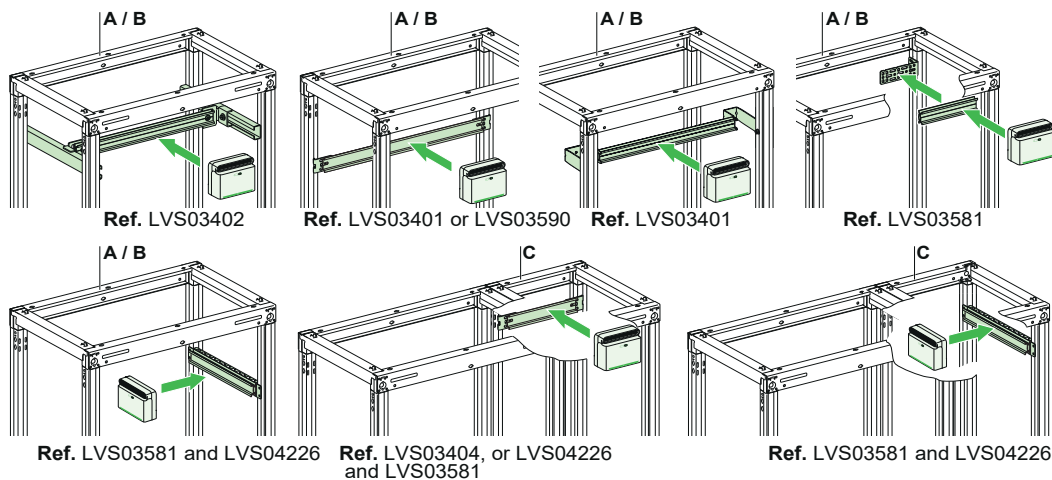DB437107.ai



DB437102.ai

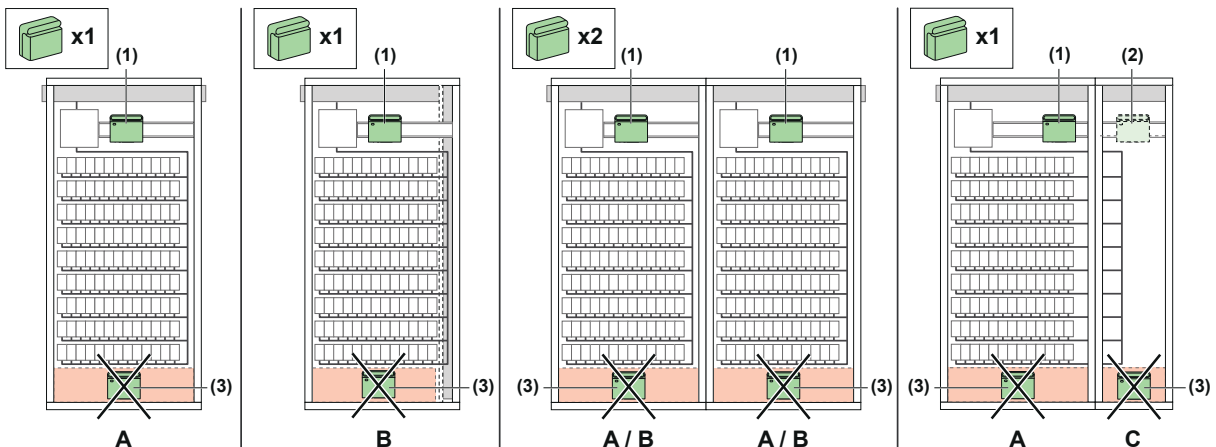



# PrismaSeT G Pack 160 - 250 enclosures up to 630 A - IP30, IP40, IP41, IP43, IP55



160 A

250 A

630 A

- Schools
- Small shops
- Hotels, etc.

Pack



- Small companies
- Buildings
- Offices
- Laboratories
- Healthcare centres
- Hotels
- Supermarkets
- Malls, etc.

PrismaSeT G Active



# PrismaSeT P Active cubicles up to 4000 A IP30, IP31, IP55

The optimised, tested and IEC compliant solution, for low voltage electrical distribution and control switchboards.



- Hospitals
- Data centres
- Logistics centres
- Shopping centres
- Offices buildings
- Medium industrial solutions

## PrismaSeT P Active



# The switchboard, central to the electrical installation

Both the point of arrival of energy and a device for distribution to the site applications, the LV switchboard is the intelligence of the system, central to the electrical installation.

It plays an essential role in the availability of electric power, while meeting the needs of personal and property safety. Its definition, design and installation are based on precise rules; there is no place for improvisation. The IEC 61439 standard aims to better define "low-voltage switchgear and controlgear assemblies", ensuring that the specified performances are reached. It specifies in particular:

- the responsibilities of each player, distinguishing those of the original equipment manufacturer; the organization that performed the original design and associated verification of an assembly in accordance with the standard, and of the assembly manufacturer - the organization taking responsibility for the finished assembly;
- the design and verification rules, constituting a benchmark for product certification.

All the component parts of the electrical switchboard are concerned by the IEC 61439 standard. Equipment produced in accordance with the requirements of this switchboard standard ensures the safety and reliability of the installation.

A switchboard must comply with the requirements of standard IEC 61439-1 and 2 to guarantee the safety and reliability of the installation. Managers of installations, fully aware of the professional and legal liabilities weighing on their company and on themselves, demand a high level of safety for the electrical installation.

What is more, the serious economic consequences of prolonged halts in production mean that the electrical switchboard must provide excellent continuity of service, whatever the operating conditions.

## The Schneider Electric solution

- Specify switchboards that comply with standard IEC 61439-1 and 2.
- Guarantee a level of safety that has been 100 % tested, from the day the switchboard is installed and throughout its service life.
- Ensure a lasting investment through easy upgrading of the installation in compliance with the standard.
- Guarantee that the switchboard complies with the technical specifications.

## PrismaSeT tested switchboards

The conformity of the switchboard has been tested and proven.

A PrismaSeT switchboard is:

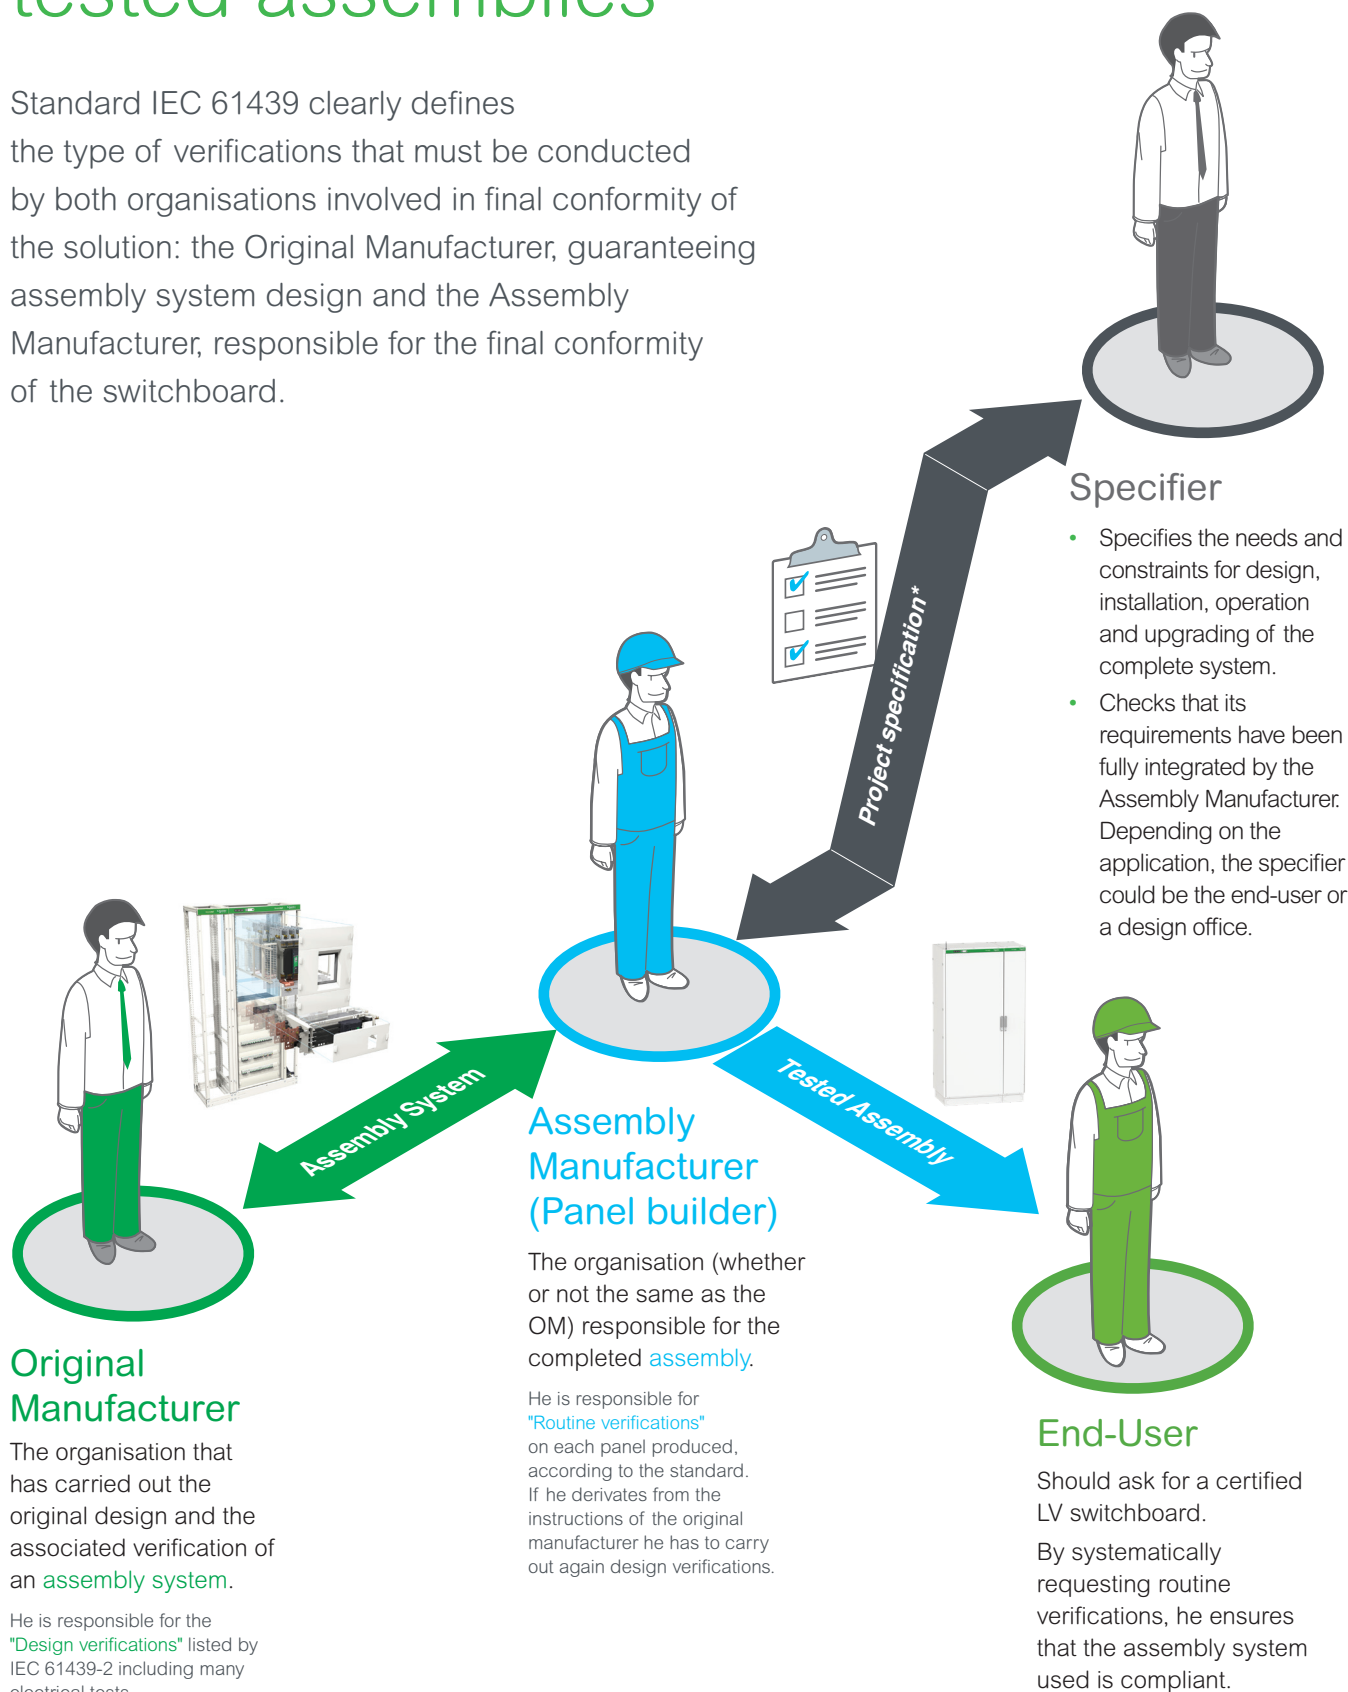
- made up of Schneider Electric low-voltage devices and components that all comply with the applicable standards;
- based on configurations in our catalog;
- made up of PrismaSeT and Linergy mechanical and electrical components that have been subjected to the verification of original equipment manufacturer;
- mounted and wired by a panelbuilder in compliance with professional standards;
- subjected to the individual verification.

Schneider Electric makes available to the panelbuilder everything required to create tested PrismaSeT switchboards, including the basic configurations in the low voltage distribution catalog, all the documentation for switchboard design and mounting, calculation and design software, etc.

Panelbuilders can demonstrate conformity with standard IEC 61439-1 and 2 by presenting the declarations or certificates of conformity for type tests carried out by independent laboratories (ASEFA, ASTA, etc.) and supplied by Schneider Electric. The panelbuilder is responsible for the individual routine verification and delivers the corresponding declarations of conformity.

# Original Manufacturer and Assembly Manufacturer: Both involved in tested assemblies

Standard IEC 61439 clearly defines the type of verifications that must be conducted by both organisations involved in final conformity of the solution: the Original Manufacturer, guaranteeing assembly system design and the Assembly Manufacturer, responsible for the final conformity of the switchboard.



B



# The main 10 functions of standard IEC 61439

For each of the following 10 functions, the standard IEC 61439 requires design verifications from the system manufacturer - mainly through type-tests - and routine verifications on each panel from the Panel Builder to achieve 3 basic goals: safety, continuity of service and compliance with end-user requirements.



## Safety

### Voltage stresses withstand capability

To withstand long term voltages, and transient and temporary overvoltages according to the insulation coordination principles and requirements.

### Current-carrying capability

To protect against burns and to withstand temperature rise:

- when any circuit is continuously loaded, alone, to the specified current
- when the assembly is loaded to the specified current according to the specified load pattern (between circuits and/or as a function of the time).

### Short-circuit withstand capability

To withstand the stresses resulting from the prospective short-circuit current and from the associated data (High forces between conductors, temp. rise in a very short time, air ionization, overpressure).

### Protection against electric shock

- Hazardous-live-parts not to be accessible (basic protection)
- Accessible conductive parts not to become hazardous-live (fault protection).

### Protection against risk of fire or explosion

- Resistance to internal glowing elements

**Note:** protection of persons, and optional protection of the assembly, against arcing due to internal fault can be specified through a "special test" according to IEC 61641.



## Continuity of service

### Maintenance and modification capability

Capability to preserve continuity of supply without impairing safety during assembly maintenance or modification

- Electrical condition of the assembly or various circuits
- Speed of exchange of the functional units
- Test facilities...

### Electro-Magnetic compatibility

To properly function (immunity) and not to generate EM disturbances (emission) in specified environmental conditions:

- Industrial networks or locations (Environment A)
- Domestic, commercial, and light industrial locations (Environment B).



## Compliance with end-user requirements

### Capability to operate the electrical installation

To properly function, according to:

- The electrical diagram of the overall system and related information (voltages, coordination...)
- The specified operating facilities (e.g. free or restricted access to Man Machine Interfaces, isolation of the outgoing circuits...).

### Capability to be installed on site

- To withstand handling, transport, storage... and installation constraints
- Capability to be erected and connected (type of enclosure, type, material and cross sectional areas of external conductors).

### Protection of the assembly against mechanical and atmospheric environmental conditions

- Presence of water or solid foreign bodies (IP according to IEC 60529)
- External mechanical impacts (optional IK according to IEC 62262)
- Indoor or outdoor installation (humidity, UV).

**IEC 61439-1 paragraph 11.4****Protection against electric shocks and integrity of protection circuits**

The following should be checked visually:

- presence of protective shields against direct and indirect contacts on live parts;
- presence of the PE conductor.

The continuity of protection circuits is ensured by compliance with the assembly instructions delivered with each product.

**IEC 61439-1 paragraph 11.5****Integration of incorporated components**

The assembly manufacturer must comply with the instructions of the original equipment manufacturer for installation and wiring of the components used.

**IEC 61439-1 paragraph 11.6****Internal electric circuits and connections**

Schneider Electric recommends marking the nut with a tinted acrylic lacquer, indelible and temperature-resistant.

This allows:

- not only self-checking to check effective tightening to torque;
- but also identification of any loosening.

**IEC 61439-1 paragraph 11.9****Dielectric properties**

The main circuits, and the auxiliary and control circuits connected to the main circuit, shall be subjected to the test voltage in accordance.

**IEC 61439-1 paragraph 11.10****Wiring, operating performance and function**

Verification of wiring and marking conformity with the drawings, parts list and diagram.

# Standard individual check sheet

in accordance with the IEC 61439-1 and 2 standard from the assembly manufacturer (panelbuilder)

Job No.: .....

Switchboard No.: .....

Drawing No./Rev. No.: .....

|                                                                         | Chapter | Verified                 |
|-------------------------------------------------------------------------|---------|--------------------------|
| Degrees of protection provided by enclosures                            | 11.2    | <input type="checkbox"/> |
| Insulation clearances and creepage distances                            | 11.3    | <input type="checkbox"/> |
| Protection against electric shocks and integrity of protection circuits | 11.4    | <input type="checkbox"/> |
| Integration of incorporated components                                  | 11.5    | <input type="checkbox"/> |
| Internal electric circuits and connections                              | 11.6    | <input type="checkbox"/> |
| Terminals for external conductors                                       | 11.7    | <input type="checkbox"/> |
| Mechanical operation                                                    | 11.8    | <input type="checkbox"/> |
| Dielectric properties                                                   | 11.9    | <input type="checkbox"/> |
| Wiring, operating performance and function                              | 11.10   | <input type="checkbox"/> |

Date of verification:

..... / ..... / .....

Verifications performed by:

.....

# Develop your business efficiency



## Switchboards that are safe...

With PrismaSeT P Active you can be sure to build 100% Schneider Electric switchboards that are safe, optimised:

- All components (switchgear, distribution blocks, prefabricated connections, etc.) are perfectly rated and coordinated to work together.
- All switchboard configurations, even the most demanding ones, have been tested.

You can prove that your switchboard meets the current standards, at any time.

You can be sure to build a reliable electrical installation and give your customers full satisfaction in terms of dependability and safety for people and the installation.



Tested low voltage switchboard, IEC 61439-1&2 compliant.



- Available power
- Safety of people and property
- Controlled costs and delivery times
- Upgradeability



# with our functional LV systems

## ... optimised and upgradeable

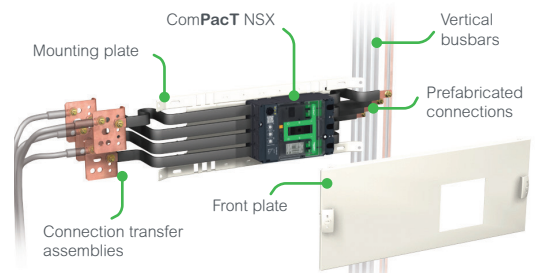
With PrismaSeT P Active you can build just the right switchboard for your customer, sized precisely to fit costs and needs. With this complete, prefabricated and tested system, it's easy to upgrade your installation and still maintain the original performance levels.

- The cubicles combine easily with switchboards already in service.
- Devices can be replaced or added at any time.



## Straightforward organisation to make your job easier

The switchboard is structured by zones dedicated to switchgear, busbars, cables, etc.



The functional units are naturally stacking in the switchboard.

Each configuration is tested for improved safety.



Temperature rise test in laboratory.

## Readily available close by

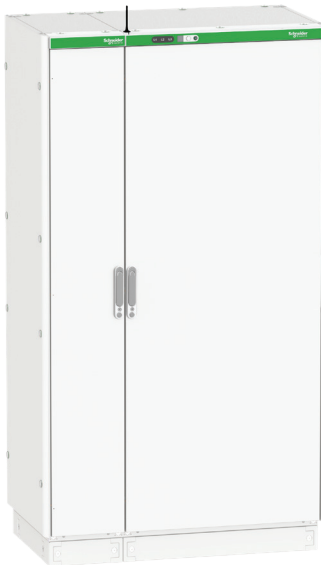
The kit concept makes handling and transport easier and you get to benefit from Schneider Electric's efficient international logistics. Your distributor, selected by Schneider Electric, can give you the very best advice.




# Electrical switchboards up to 4000 A

The PrismaSeT P Active functional system can be used for all types of low-voltage distribution switchboards (main, subdistribution and final) up to 4000 A, in commercial and industrial environments.

Configuration 6 - v2.png



PD380150\_SE\_R.eps

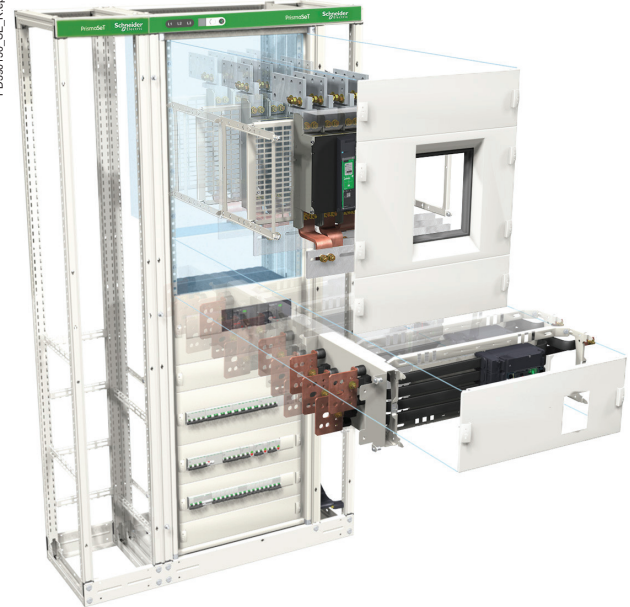

## Switchboard design is very simple

### 1. A metal structure

The switchboard is made up of one or more frameworks combined side-by-side or back-to-back, on which a complete selection of cover panels and doors can be mounted.

### 2. A distribution system

Horizontal busbars or vertical busbars positioned in a lateral compartment or at the rear of the cubicle are used to distribute electricity throughout the switchboard.

### 3. Complete functional units

- a dedicated mounting plate for device installation
- a front plate to block direct access to live parts
- prefabricated busbar connections
- devices for on-site connections.

Each functional unit contributes to a function in the switchboard.

The functional units are modular and are arranged rationally.

The system includes everything required for functional unit mounting, supply and onsite connection.

The components of the PrismaSeT P Active and those of the functional units in particular have been designed and tested taking into account device characteristics.

This design approach ensures a high degree of reliability in system operation and optimum safety for personnel.



## Assets of switchboards

### 1. A dependable electrical installation

The total compatibility of Schneider Electric devices with the PrismaSeT P Active is a key advantage in ensuring a high level of installation dependability.

### 2. An upgradeable electrical installation

Thanks to modular design, PrismaSeT P Active switchboards can be modified easily to integrate new functional units as needed. Maintenance operations, carried out with the switchboard de-energised, are fast and straight-forward due to easy access to devices.

### 3. Total safety for personnel

Work in a switchboard must be carried out by authorised persons in compliance with all applicable safety regulations.

To increase the safety of personnel, devices are installed behind protective front plates; only the operating handles are accessible.

Additional internal protection (partitions, barriers) is available to create form 2, 3 or 4 separation to protect against direct contacts with live parts.

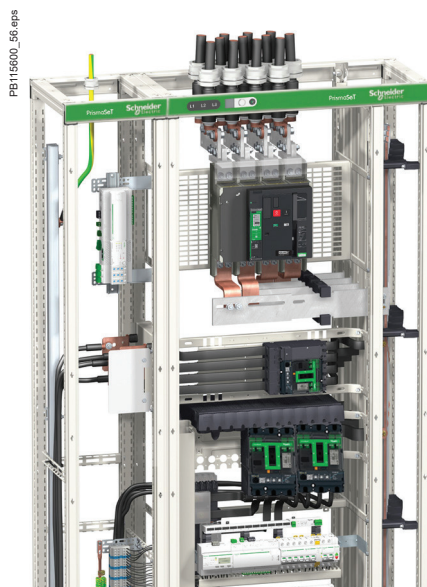
Terminal shields are mandatory for installation of ComPacT NSX and INS/INV devices in PrismaSeT P Active enclosures.

### 4. Connected solutions

- Fire prevention
- Power availability
- Energy Management

# Electrical switchboards up to 4000 A

System design has been validated by type tests as per standards IEC 61439-1 and 2 and benefits from the combined experience of Schneider Electric customers over many years.



B



## Electrical characteristics

Complying with standards IEC 62208 and EN 62208:

- rated insulation level of main busbars: 1000 V
- $I_n$  A : 4000 A
- rated peak withstand current  $I_{pk}$ : 220 kA
- rated short-time withstand current  $I_{cw}$ : 100 kA rms / 1 second
- frequency: 50/60 Hz
- voltage  $U_e$  = 690 V under conditions



## Mechanical characteristics

- Steel sheet metal
- Cathaphoresis treatment + hot-polymerised polyester epoxy powder, white colour RAL 9003
- Can be dismantled
- Can be combined side-by-side and back-to-back
- Degree of protection:
  - IP30: with IP30 cover panels including a door or a cover frame
  - IP31: with IP30 cover panels including a door + gasket
  - IP55: with IP55 cover panels
- Degree of protection against mechanical impacts:
  - IK07: with cover frame
  - IK08: with IP30 door
  - IK10: with IP55 door
- Framework dimensions:
  - four widths:
    - W = 300: cable compartment
    - W = 400: cable compartment or device compartment
    - W = 650: device compartment or cable compartment
    - W = 800: device compartment with busbar compartment or cable compartment
  - two depths: 400, 600 mm
  - height: 2000 mm.
- Indoor cubicles.



See "How to assemble an electrical switchboard"  
Guide DESW043EN



Electrical switchboards built using the PrismaSeT P Active functional system and Schneider Electric recommendations fully comply with international standards IEC 61439-1 and 2.

# PrismaSeT 6300 - LV switchboards for harsh environments up to 4000 A

When demanding applications and severe conditions require the best, assure your success with PrismaSeT 6300.



## Technical characteristics

- High grade steel, durable epoxy painting techniques and ingenious design for a remarkable robustness.
- Steel sheet metal, thickness 1.5 mm on panels and 1.8 mm on doors.
- Electrophoresis treatment and hot-polymerised polyester epoxy powder.
- White color RAL 9003.
- Degree of protection: IP55 (IEC 60529).
- Degree of protection against mechanical impacts: IK10 with door (IEC 62262).
- Frame dimensions:
  - 2 widths:
    - 700 mm (for functional units)
    - 300 mm (for vertical busbars and cables ducts)
  - 2 depths:
    - 500 mm (up to 1600 A)
    - 800 mm (up to 4000 A)
  - height: 2000 mm.



## Reinforced solution for low voltage switchboards up to 4000 A

More than PrismaSeT, PrismaSeT 6300 contributes to safety of persons as well as to reliability and continuity of service of the electrical installation. Thanks to its reinforced metal structure, it combines outstanding robustness with versatility and flexibility, by resisting to harsh environments and heavy loads. PrismaSeT PH is ready to perform in any condition.

As PrismaSeT, PrismaSeT PH is a solution of kit cubicles for low voltage electrical distribution switchboards:

- the components (switchgear, busbars, etc.) are designed for joint operation
- all the most demanding switchboard configurations have been tested and are IEC standard compliant.



## Total safety and reliability

PrismaSeT 6300 is designed to operate up to 4000 A.

It is fully tested to perform in extreme conditions, and fully compliant with standards IEC 61439-1 and 2, IEC 62208.

PrismaSeT 6300 withstands seismic vibrations (Standard EDF CRT91C11200, AS1170, EAK 2000, ENDESA 1986, RPA 99 2003, Gore GR 63, Turkish Seismic Code, GOST 17516.1-90).

Seismic tests are performed by an external laboratory, CESI Labs. All documentation required by local authorities and customers in order to get the approval are available.

Seismic resistance for civil installations: 0.7 g APN (rms) and 3.5 g peak, without any extra accessories.



# Solutions for continuity of service in electrical installations with PrismaSeT



## The right level of continuity of service

All organizations have some sensitivity to the continuity of service of electrical power.

For some power is a vital component to their ongoing success and viability.

The required level of continuity of service must be considered for each application so that the electrical installation can be optimised accordingly.

The stakes of continuity of service are high. Even a brief electrical distribution failure can have serious consequences on many activities.

### Continuity of service solutions for Operation, Maintenance, Evolution

All solutions proposed comply with standards EN 61439-1 and EN 61439-2.

The system solutions proposed include Schneider Electric products exclusively to fully ensure compatibility and operation.

To ensure safety, solutions with switchgear mounted on plug-in bases, withdrawable chassis and disconnectable or withdrawable mounting plates include safety trip levers that open the circuit breaker if it is removed in closed position.

B



## For highest continuity of services

### Functional units with devices on live-disconnectable mounting plates

Disconnectable IS 223:  
(correspondence with standard IEC 61439-2: WFD)

- High continuity of service
- Maximum time to restore power after maintenance: 1 CEhour
- Live upgrading.

### Functional units with devices on live-withdrawable mounting plates

Disconnectable IS 233: (correspondence with standard IEC 61439-2 : WWW)

- High continuity of service
- Maximum time to restore power after maintenance: 1/4 h
- Live upgrading.



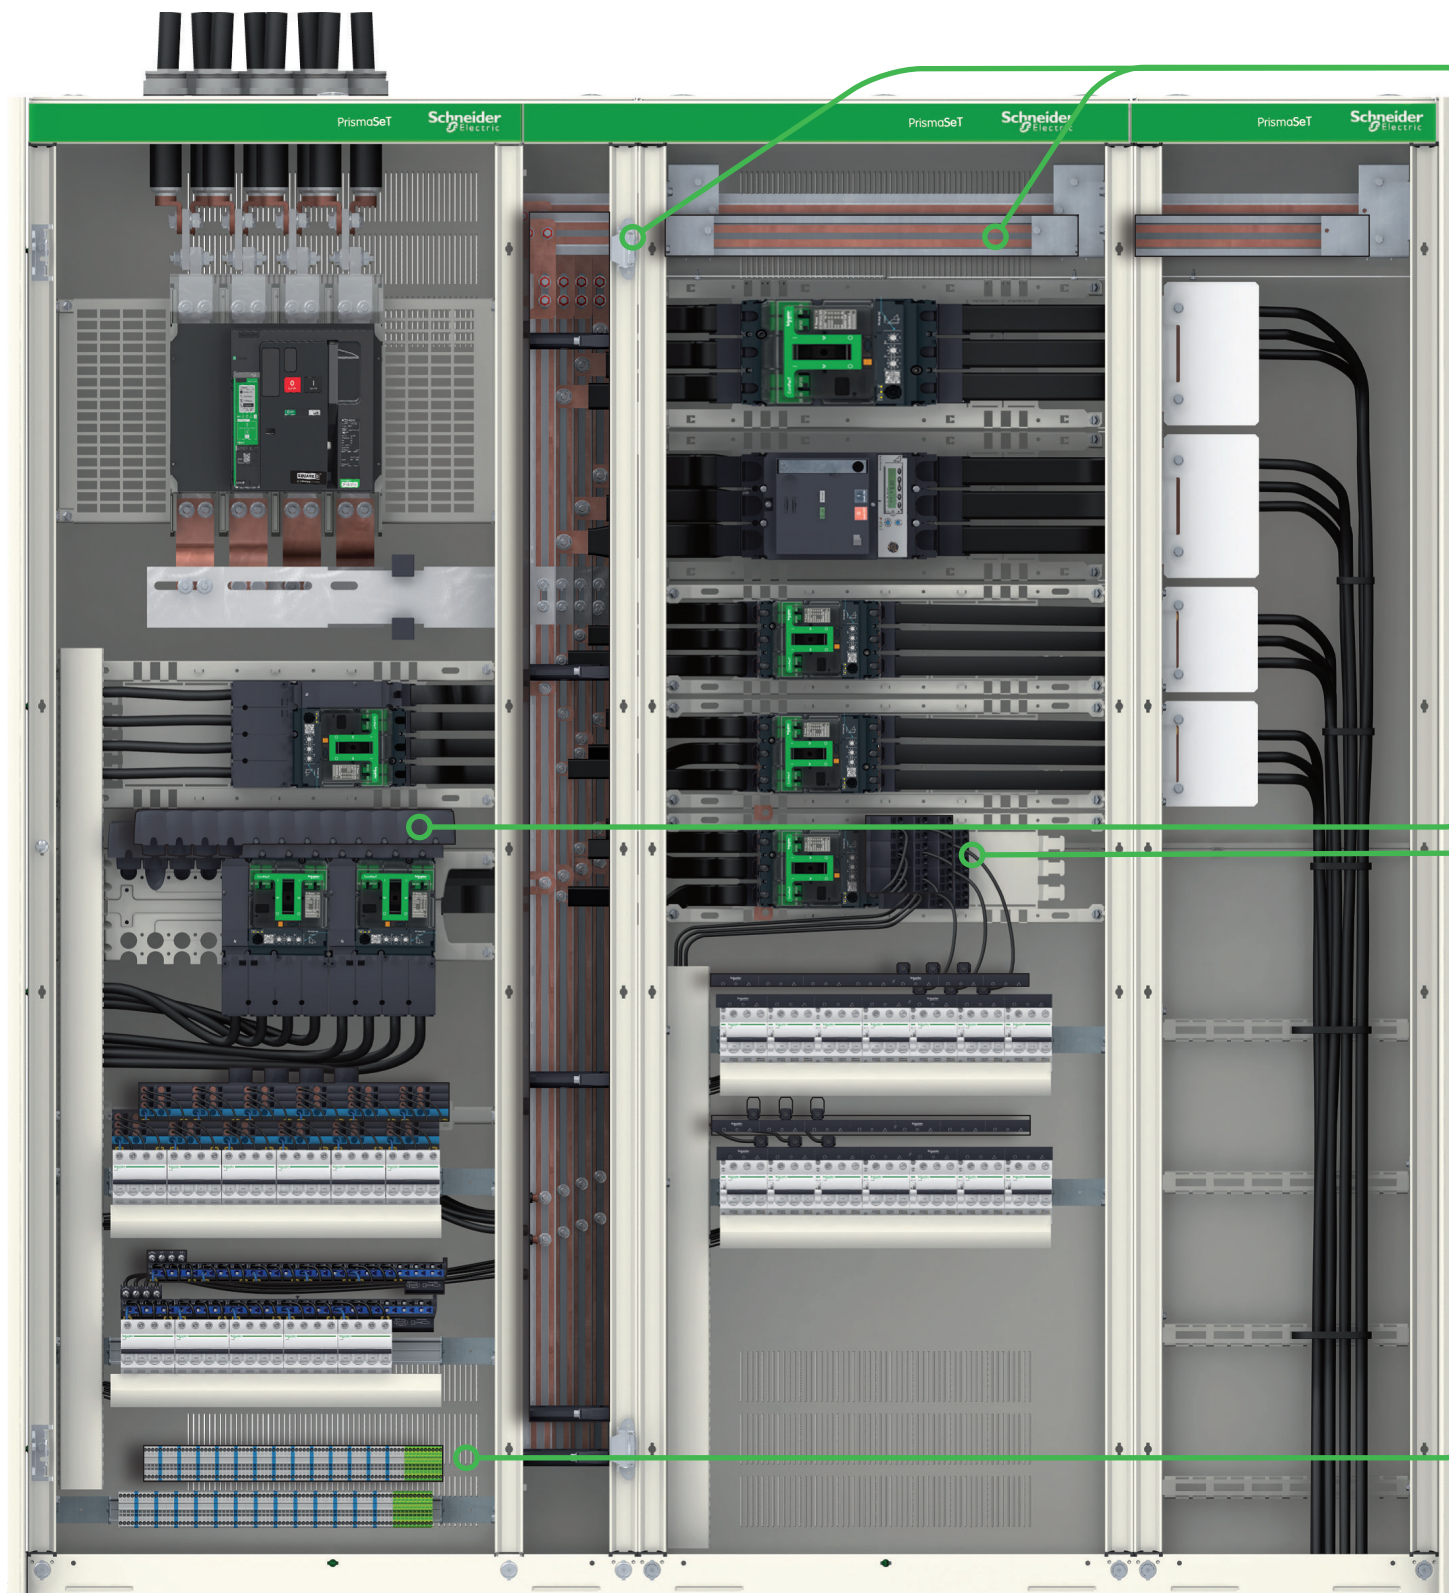
See Linergy HK "Hot plug distribution"

- Quick connections
- Panel easily upgradeable
- Reliable "hot plug" modification or upgrade (LVYED213001EN).





# Linerity offers you smart power network




# solutions for your switchboard.

B

## Linergy LGY / LGYE / BS

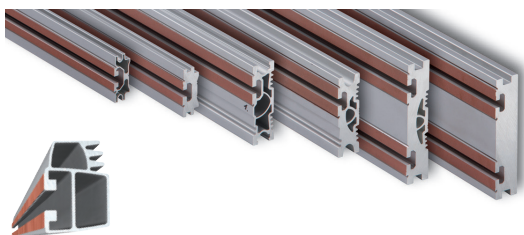Power busbars




- Solutions available up to 4000 A
- Connection everywhere without drilling (with LGY and LGYE profile)

👉 page G-2 to G-5

## Linergy FC

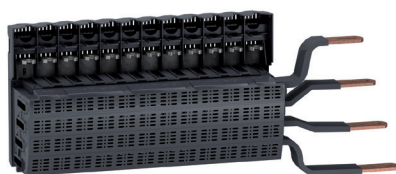Quick distribution blocks




- ComPacT NSXm (4 x 4P / 5 x 3P) solution
- ComPacT NSX (3 x 4P / 4 x 3P) solution
- Reliable connection
- Quick connection system dedicated to ComPacT NSXm up to 160A / ComPacT NSX up to 250 A

👉 pages G-18, G-20

## Linergy DP

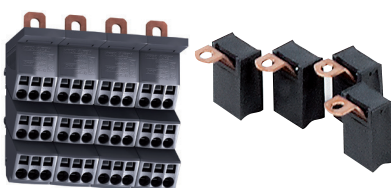Distribution blocks




- Simplicity of use
- Quick connection system dedicated to ComPacT NSXm up to 160A / ComPacT NSX up to 250 A

👉 pages G-16, G-17

## Linergy TR

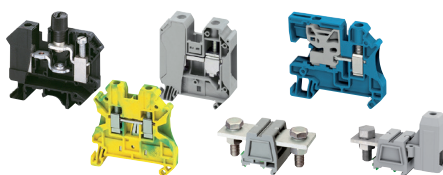Terminal blocks and bars



- Simplicity of use
- Consistency and cross-functionality guaranteed

👉 page G-42

# Secure power distribution and monitoring solution for operating theatres

To ensure the safety of patients, the availability and quality of electric power are essential. The electrical installations of operating theatres should enable the continuity of healthcare in all circumstances.



## A solution you can trust...

- All the components of this solution are designed, manufactured, and tested by Schneider Electric to operate together and be implemented by trained and approved partners.
- Schneider Electric provides maintenance plans and operating procedures linked to this solution.
- Schneider Electric ensure the continuity of the components throughout the installation's life.

## ... thanks to secure power distribution...

- The solution Schneider Electric incorporates an isolation transformer and a continuous insulation monitor in compliance with the required standards to ensure the supply of power to medical equipment in the event of a first insulation fault.
- The continuity of the electric power supply is ensured thanks to total coordination of all the Schneider Electric components, including and uninterruptible power supply.
- The Schneider Electric solution is designed, wired and tested to attenuate electromagnetic disturbances in accordance with the IEC 60364-4-44 standard.

## ... to event monitoring and traceability

The Schneider Electric solution incorporates a monitoring system to:

- inform maintenance and medical personnel in real time in the event of an electrical fault in the operating room
- monitor the operating room environment and record all environmental events and data
- provide data to the hospital building management system.



To know more, see the solution guide, ref. DESWED109024.



## Enhancing patient safety

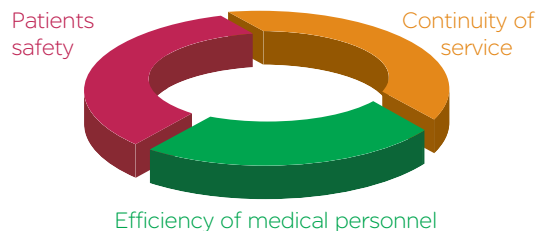
Ensuring the satisfactory operation of operating room is essential for a hospital.

## Ensuring continuity of electrical service

Because nothing must disturb the medical team during operations.

## Improving the efficiency of hospital personnel

A controllable environment and perfectly functioning equipment mean more comfort.







# Green Premium™

An industry leading portfolio of offers delivering sustainable value



More than 75% of our product sales offer superior transparency on the material content, regulatory information and environmental impact of our products:

- RoHS compliance
- REACH substance information
- Industry leading # of PEP's\*
- Circularity instructions



Discover what we  
mean by green  
**Check your products!**

The Green Premium program stands for our commitment to deliver customer valued sustainable performance. It has been upgraded with recognized environmental claims and extended to cover all offers including Products, Services and Solutions.

#### CO<sub>2</sub> and P&L impact through... Resource Performance

Green Premium brings improved resource efficiency throughout an asset's lifecycle. This includes efficient use of energy and natural resources, along with the minimization of CO<sub>2</sub> emissions.

#### Cost of ownership optimization through... Circular Performance

We're helping our customers optimize the total cost of ownership of their assets. To do this, we provide IoT-enabled solutions, as well as upgrade, repair, retrofit, and remanufacture services.

#### Peace of mind through... Well-being Performance

Green Premium products are RoHS and REACH compliant. We're going beyond regulatory compliance with step-by-step substitution of certain materials and substances from our products.

#### Improved sales through... Differentiation

Green Premium delivers strong value propositions through third-party labels and services. By collaborating with third-party organizations we can support our customers in meeting their sustainability goals such as green building certifications.

\*PEP: Product Environmental Profile (i.e. Environmental Product Declaration)



# Standards and certifications

# Contents

## Standards and tested switchboards

### Standards

|                                  |     |
|----------------------------------|-----|
| Regional standardization systems | C-2 |
| Standards types                  | C-3 |

## Enclosure characteristics

|                                |     |
|--------------------------------|-----|
| Properties of metal enclosures | C-7 |
|--------------------------------|-----|

## Thermal characteristics of switchboards

### Thermal management of switchboards

|                    |      |
|--------------------|------|
| General            | C-9  |
| Comparative method | C-11 |
| Example            | C-12 |
| Charts             | C-14 |
| Ventilation        | C-15 |
| Heating            | C-16 |

## Specific application

### PrismaSeT P Active Seismic

|                         |      |
|-------------------------|------|
| Specific application    | C-17 |
| Seismic kit             | C-18 |
| Installation conditions | C-19 |

## Standards

### Regional standardization systems



### Standards and tested switchboards

#### IEC international standards

##### IEC member countries

|                 |                |
|-----------------|----------------|
| Argentina       | Luxemburg      |
| Australia       | Malaysia       |
| Austria         | Mexico         |
| Belarus         | Netherlands    |
| Belgium         | New Zealand    |
| Brazil          | Norway         |
| Bulgaria        | Pakistan       |
| Canada          | Poland         |
| China           | Portugal       |
| Croatia         | Rumania        |
| Czech Rep.      | Russia         |
| Denmark         | Singapore      |
| Egypt           | Slovakia       |
| Finland         | Slovenia       |
| France          | South Africa   |
| Germany         | Spain          |
| Greece          | Sweden         |
| Hungary         | Switzerland    |
| India           | Thailand       |
| Indonesia       | Turkey         |
| Iran            | Ukraine        |
| Ireland         | United Kingdom |
| Israel          | United States  |
| Italy           | Yugoslavia     |
| Japan           |                |
| Korea (Rep. of) |                |

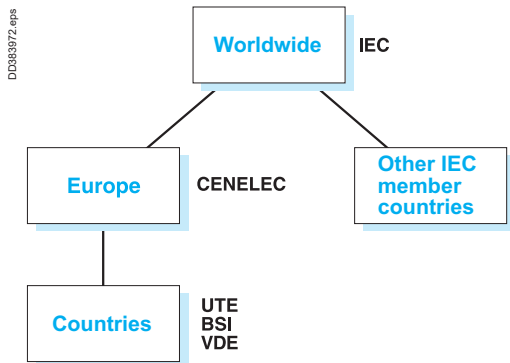
The IEC (International Electrotechnical Commission) is a worldwide organisation for standardisation comprising all national electrotechnical committees (IEC National Committees).

The object of the IEC is to promote international cooperation on all questions concerning standardisation in the electrical and electronic fields.

To that end, the IEC publishes International Standards.

Their preparation is entrusted to technical committees and any IEC National Committee interested in the subject dealt with may participate in the preparatory work.

#### Local standards



##### In Europe

The IEC documents are first studied by CENELEC, which establishes:

- either a European standard (EN), often identical to the IEC standard, which then becomes the applicable national standard in all the member countries
- or, in the event of differences, a harmonisation document (HD).

##### Other IEC member countries

Each country is autonomous and can accept the IEC standard as the national standard, with or without modifications.

Even though they are IEC members, countries such as Japan and the United States continue to develop their own standardisation systems.

##### Countries without a standardisation system

It is possible to refer to an IEC standard in the framework of a project.

##### CEI / IEC

Commission Electrotechnique Internationale

##### CENELEC

Comité Européen de Normalisation ELECTrotechnique

##### UTE

Union Technique de l'Électricité

##### VDE

Verband der Elektrotechnik, Elektronik und Informationstechnik

e.v. (German electrotechnical, electronics and computer technology standardisation organisation)

##### BSI

British Standards Institution

## Standards

### Standards types



## Standards and tested switchboards

### The different types of standards

There are different types of standards, including:

- management standards
- installation standards
- product standards.

#### Management standards

**ISO 9004:** Quality-management systems - guidelines for performance improvements. Used in setting up a quality-management system.

**ISO 9001:** Quality management systems - requirements. Used for certification audits.

**ISO 14004:** Environmental-management systems. General guidelines on the principles, systems and supporting techniques.

**ISO 14001:** Environmental-management systems. Specification with guidance for use

- The majority of Schneider Electric development centres and factories are certified ISO 9001 and ISO 14001.

#### Installation standards

The set of IEC 60364-X standards defines the main principles and rules on:

- determining general characteristics of installations
- protection
- selection and installation of equipment
- verification and maintenance of installations.

#### Product standards

They apply to devices or assemblies and are aimed at ensuring correct operation and safety of the concerned products.

- standards on low-voltage switchgear and controlgear:

- IEC 60947-1: general rules
- IEC 60947-2: circuit breakers
- IEC 60947-3: switches and disconnectors
- IEC 60947-4: contactors
- IEC 62208: empty enclosures.

- standards on low-voltage switchgear and controlgear assemblies:

- IEC 61439-1: general rules
- IEC 61439-2: power switchgear and controlgear assemblies
- IEC 61439-3: distribution boards
- IEC 61439-4: assemblies for construction sites
- IEC 61439-5: assemblies for power distribution
- IEC 61439-6: busbar trunking systems.

Regulations in a given country may make certain standards legally binding and may also create additional safety requirements.

In addition to providing proof of the conformity of its quality-management system, a product manufacturer can demonstrate the quality of products by providing proof that the design and manufacture comply with the requirements in the applicable standard.


Proof of conformity may be a declaration by the manufacturer or a certificate supplied by an independent organisation.




Design and manufacture.



Switchgear and controlgear assemblies.



Switchgear and controlgear.



Installation.



## Standards



## Standards and tested switchboards

## CE marking

CE marking is a regulatory symbol attributed under the sole responsibility of the manufacturer and intended for the verification authorities of the European countries that enforce the European regulations.

It allows free circulation of a product in the European Union and certifies that it complies with the basic requirements in all the applicable European directives.

CE marking is not a quality symbol and does not indicate conformity with a standard.

The CE declaration is intended exclusively for the authorities in charge of verifying compliance with the applicable regulations and it is drafted, signed and held for presentation to the authorities by the manufacturer.

For the PrismaSeT P Active range, the declaration is the responsibility of the Schneider Electric

unit that has designed and developed the product.

For LV switchboards, the declaration is the responsibility of the panelbuilder.

The following products receive CE marking:

- all products that are liable to endanger the safety of persons, animals and property (LV directive)
- all products likely to emit electromagnetic disturbances above a standardised threshold or to be disturbed during operation (EMC directive).

Consequences:

- the PrismaSeT P Active range falls under the LV directive only
- LV switchboards are covered by the LV directive and may also fall under the EMC directive, depending on the type of devices incorporated.



For the PrismaSeT P Active range, CE marking is applied:

- on the packing of "mechanical" components
- on the product itself for "electrical" components.

For the LV assemblies created by the panelbuilder, CE marking is applied:

- on the packing
- on the rating plate (if applicable)
- on one of the documents accompanying the switchboard when it is shipped.



## Standards and tested switchboards

### Degree of protection

### IP code

Standard IEC 60364-5-51 lists and codifies a large number of external influences to which electrical installations can be subjected, including the presence of water, solid objects, shocks, vibrations, corrosive substances, etc.












Standard IEC 60529 (IP code, February 2001) indicates the degrees of protection provided by an enclosure for electrical devices against access to hazardous parts, against penetration of solid foreign objects and against penetration of water.

These standards do not apply for the protection against the risks of explosion or conditions such a humidity, corrosive vapour, fungus or vermin.

The IP code is made up of two characteristic numerals and can include an additional letter when the actual protection for persons against access to the hazardous parts is better than that indicated by the first numeral.

The first numeral characterises the protection provided against the ingress of solid foreign objects and the protection of persons.

The second numeral characterises the protection provided against the ingress of water with harmful effects.

| 1 <sup>st</sup> numeral |                                                                                                                                                 | 2 <sup>nd</sup> numeral                                                                                                                                                 |   |                                                                                                                                                                    |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protection of persons   |                                                                                                                                                 | Protection against ingress of solid objects                                                                                                                             |   |                                                                                                                                                                    |
| 1                       | Protected against access with back of hand<br>Dd381959.eps<br> | Protection against solid foreign objects larger than 50 mm<br>Dd381959.eps<br>         | 1 | Protected against vertically dripping water (condensation)<br>Dd381966.eps<br>  |
| 2                       | Protected against access with a finger<br>Dd381960.eps<br>   | Protection against solid foreign objects larger than 12.5 mm<br>Dd381963.eps<br>     | 2 | Protected against dripping water up to 15° from vertical<br>Dd381967.eps<br>  |
| 3                       | Protected against access with a tool<br>Dd381961.eps<br>     | Protection against solid foreign objects larger than 2.5 mm<br>Dd381964.eps<br>      | 3 | Protected against spraying water up to 60° from vertical<br>Dd381968.eps<br>  |
| 4                       | Protected against access with a wire<br>Dd381962.eps<br>     | Protection against solid foreign objects larger than 1 mm<br>Dd381962.eps<br>        | 4 | Protected against splashing water from all directions<br>Dd381969.eps<br>     |
| 5                       | Protected against access with a wire<br>Dd381962.eps<br>     | Protected against dust (dust protected)<br>Dd381964.eps<br>                          | 5 | Protected against water jets from all directions<br>Dd381970.eps<br>          |
| 6                       | Protected against access with a wire<br>Dd381962.eps<br>     | Dust tight<br>Dd381965.eps<br>                                                       | 6 | Protected against powerful water jets from all directions<br>Dd381971.eps<br> |
|                         |                                                                                                                                                 | 7                                                                                                                                                                       |   |                                                                                                                                                                    |
|                         |                                                                                                                                                 | Protected against the effects of temporary immersion in water<br>Dd381972.eps<br>  |   |                                                                                                                                                                    |
|                         |                                                                                                                                                 | 8                                                                                                                                                                       |   |                                                                                                                                                                    |
|                         |                                                                                                                                                 | Protected against the effects of continuous immersion in water<br>Dd381973.eps<br> |   |                                                                                                                                                                    |
|                         |                                                                                                                                                 | 9                                                                                                                                                                       |   |                                                                                                                                                                    |
|                         |                                                                                                                                                 | Protected against close-range high pressure, high temperature spray downs                                                                                               |   |                                                                                                                                                                    |



## Standards and tested switchboards

### Degree of protection

#### IP Code

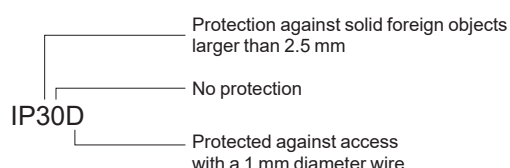
Standard IEC 60364-5-51 lists and codifies a large number of external influences to which electrical installations can be subjected, including the presence of water, solid objects, shocks, vibrations, corrosive substances, etc.

The additional letter is used only if the actual protection of persons is higher than that indicated by the first characteristic numeral of the IP code.

| Additional letter | Protection                                            |
|-------------------|-------------------------------------------------------|
| A                 | Protected against access with back of hand            |
| B                 | Protected against access with a 12 mm diameter finger |
| C                 | Protected against access with a 2.5 mm diameter tool  |
| D                 | Protected against access with a 1 mm diameter wire    |

If only the protection of persons is of interest, the two characteristic numerals are replaced by the letter "X", e.g. IPXXB.

#### Illustration of the above explanations:



#### Remarks

- The degree of protection IP must always be read and understood numeral by numeral and not as a whole.  
For example, an IP31 wall-mount enclosure is suitable for an environment that requires a minimum degree of protection IP21. However an IP30 wall-mount enclosure is not suitable.
- the degrees of protection indicated in this catalog are valid for the enclosures as presented. However, the indicated degree of protection is guaranteed only when installation and device mounting are carried out in accordance with professional standards that conserve the initial degree of protection.

#### IK code

Standard IEC 62262 defines an IK code characterising the capacity of products to resist mechanical impacts from all sides.

| IK code | Impact energy (joules) |
|---------|------------------------|
| 01      | 0.14                   |
| 02      | 0.2                    |
| 03      | 0.35                   |
| 04      | 0.5                    |
| 05      | 0.7                    |
| 06      | 1                      |
| 07      | 2                      |
| 08      | 5                      |
| 09      | 10                     |
| 10      | 20                     |

IK codes can be selected according to the risks of impacts on a given site.

|                                                        | Site               | Recommended IK             |
|--------------------------------------------------------|--------------------|----------------------------|
| No risk of major impact                                | Technical premises | 07                         |
| Significant risk of impact that can damage devices     | Hallways           | 08 (switchboard with door) |
| Maximum risk of impact that can damage the switchboard | Workshops          | 10                         |

## Properties of metal enclosures

### Enclosure characteristics

#### Anti-corrosion withstand

Schneider Electric enclosures comply with standard IEC 62208, EN 50298 for empty enclosures. The sheet metal used for Schneider Electric enclosures receives an anti-corrosion cathodolysis primer treatment and a coating of a thermosetting, polyester-resinmodified epoxy powder for colour and appearance. This two-coat system provides excellent finish and corrosion protection. The characteristics of this coating are much better than those of traditional epoxy powders:

- improved colour stability
- wider operating temperature range.

#### Mechanical properties of frame

##### Static load on doors, wall-mounted and floor-standing enclosures and cubicles

|              |        |
|--------------|--------|
| Cubicle      | 400 kg |
| Cubicle door | 12 kg  |

#### Mechanical properties of powder coated surfaces

##### Test conditions

**Test piece made of 1 mm thick steel sheet, degreased, iron phosphated, final rinsing with 100 kΩ cm DI water, 15 microns of anti-corrosion electrophoresis treatment and 35 microns of powder paint.**

|                                     |                  |            |
|-------------------------------------|------------------|------------|
| Adhesion (cross-hatch and pull-off) | class 0 required | (ISO 2409) |
| Impact strength <sup>(1)</sup>      | > 1 kg/50 cm     | (ISO 6272) |
| Mandrel bending test <sup>(2)</sup> | < 10 mm          | (ISO 6860) |
| Persoz hardness                     | 300 s            | (ISO 1522) |

<sup>(1)</sup> No cracking of the paint film after dropping a weight of 1 kg on the test piece from a height of 50 cm.

<sup>(2)</sup> Film cracks over a length of 10 mm maximum.

#### Artificial ageing test on powder coating

##### Test conditions:

**Two tests carried out on the same 1 mm thick steel sheet test piece.**

- cyclical damp-heat test:
  - as per standard IEC 68-2-30
  - six 24-hour cycles at temperatures higher than 40 °C
- continuous resistance to neutral salt mist:
  - the tests were carried out over a period of 400 hours, far more than the 48 hours required by the standard for indoor installations
  - as per standard IEC 68-2-11 and ISO 7253
  - 400 hours without blistering for normal surface on test piece
  - 250 hours for a scratched surface.

##### Evaluation of corrosion as per ISO 4628:

- adhesion: class ≤ 1
  - blistering: degree 1 dim. 1
  - rusting: Ri 1
  - cracking: class 1
  - flaking imp. 1 dim. 1
- propagation of corrosion under scratch with respect to the scratch axis: 3 mm max.



## Properties of metal enclosures

### Enclosure characteristics

#### Chemical properties of powder coating

Tests carried out at ambient temperature on phosphated test pieces coated with a 150 to 200 micron film.

| Test duration (months) |                      | 2 | 4 | 6 | 8 | 10 | 12 |
|------------------------|----------------------|---|---|---|---|----|----|
| Acids                  | Concentration        |   |   |   |   |    |    |
|                        | Acetic 20 %          |   |   |   |   |    |    |
|                        | Sulphuric 30 %       |   |   |   |   |    |    |
|                        | Nitric 30 %          |   |   |   |   |    |    |
|                        | Phosphoric 30 %      |   |   |   |   |    |    |
|                        | Hydrochloric 30 %    |   |   |   |   |    |    |
|                        | Lactic 10 %          |   |   |   |   |    |    |
| Bases                  | Citric 10 %          |   |   |   |   |    |    |
|                        | Soda 10 %            |   |   |   |   |    |    |
| Water                  | Ammonia 10 %         |   |   |   |   |    |    |
|                        | Distilled water      |   |   |   |   |    |    |
|                        | Seawater             |   |   |   |   |    |    |
|                        | Tap water            |   |   |   |   |    |    |
| Solvents               | Diluted bleach       |   |   |   |   |    |    |
|                        | Petrol               |   |   |   |   |    |    |
|                        | High alcohols        |   |   |   |   |    |    |
|                        | Aliphatics           |   |   |   |   |    |    |
|                        | Aromatics            |   |   |   |   |    |    |
|                        | Ketones, esters      |   |   |   |   |    |    |
|                        | Tri-perchlorethylene |   |   |   |   |    |    |

 Film intact.

 Film damaged (blisters, yellowing, loss of shine).

# Thermal management of switchboards

## General

### Thermal characteristics of switchboards

A switchboard is designed for operation under normal ambient conditions. Most devices do not operate correctly outside a temperature range of -10 and +70 °C.

It is therefore important to maintain the switchboard internal temperature within this temperature range by:


- correctly sizing the switchboard during design
- correcting the temperature using suitable means.

### Management of the internal temperature


#### Cooling

There are a number of ways to dissipate heat from the switchboard. The drawings below present the various means.



##### Convection



Ensured naturally in PrismaSeT P Active enclosures.




##### Forced-air ventilation




Using fans, it significantly increases the thermal capacity of an enclosure.

##### Forced-air ventilation with air-air exchanger



On special request.

##### Forced convection and cooling



For these extreme cases, many installers prefer to set up the switchboards with other electrotechnical and electronic devices in air-conditioned electrical rooms.

#### Heating

The means employed to raise the internal temperature in a switchboard is a resistor-based heater, used to:

- avoid condensation by limiting variations in temperature
- ensure that the switchboard does not freeze.

# Thermal management of switchboards

## General

### Thermal characteristics of switchboards

#### Calculation of the internal temperature

Calculation of the temperature is the means to check that the enclosure can evacuate the dissipated power of the installed devices.

##### Important note

**Correct thermal management of the switchboard depends on compliance with the installation requirements for the distribution system (power circuits).**

Incorrect installation will have major consequences on the connected device, but almost none on the internal temperature of the enclosure.


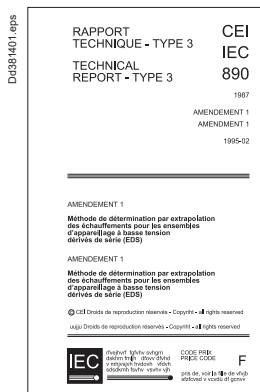
Once the circuit has been correctly sized, it is necessary to check whether the assembly (devices + distribution system + cables) have a level of dissipated power  $P(W) \leq$  the  $P(W)$  that the enclosure can handle.

##### Method defined by IEC 890 technical report

This IEC guide for switchboards proposes a calculation method to determine three levels of internal temperature, depending on the dissipated power of the devices and distribution blocks installed in the switchboard.

Users can consult this document when it is necessary to determine precisely the internal temperature in view of optimising the switchboard.


On request, Schneider Electric can carry out a thermal study to check that the installed assembly and the thermal capacity of the enclosure are compatible.



##### Comparative method

A number of qualified and tested configurations serve as the basis for indicating the thermal capacity of PrismaSeT P Active enclosures.

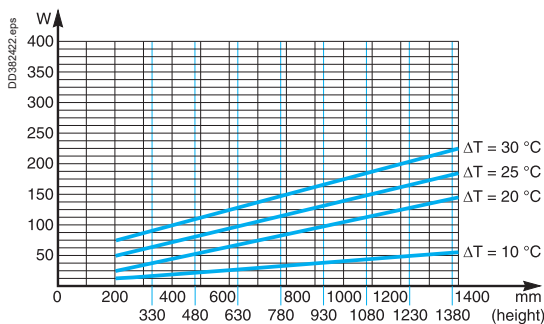This is an empirical means to check whether the dissipated power of the desired configuration is close to that of a tested configuration.



##### Method using charts taking into account enclosure characteristics

To speed up calculations, Schneider Electric produces charts based on the company's experience and a number of assumptions on the installation. They can be used sufficiently precisely to determine the variations in temperature and the dissipated-power levels for the different types of wall-mounted enclosures, floor-standing enclosures and cubicles.

For details on the calculation of the dissipated power in the device zone, see page C-12.

## Thermal management of switchboards

## Comparative method

## Thermal characteristics of switchboards

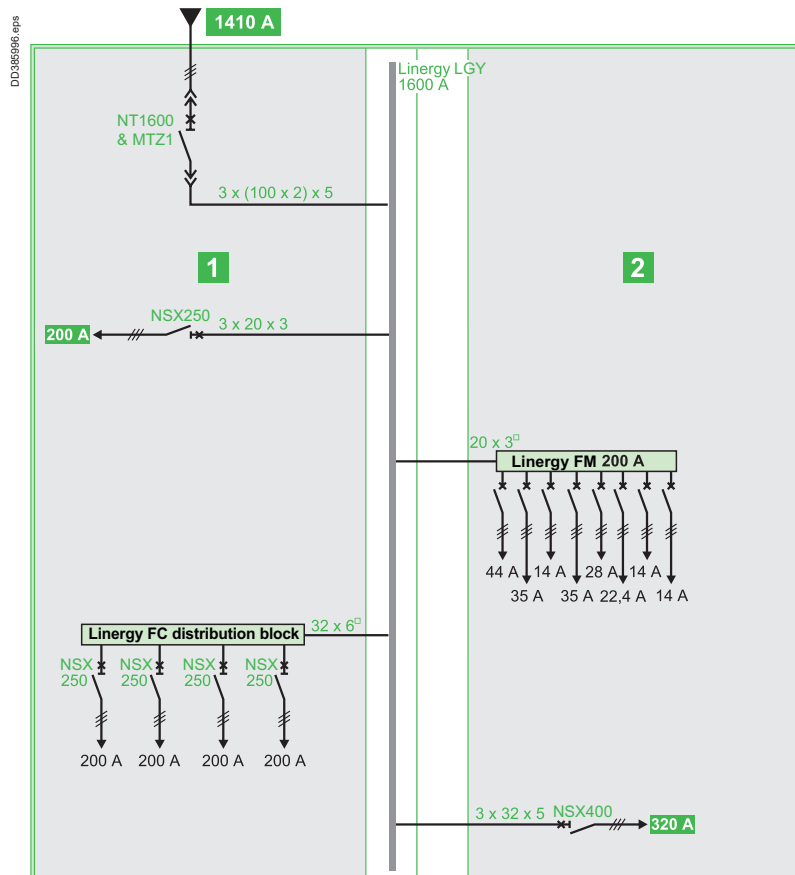
Two cubicles with busbar compartment, 800 mm wide, 400 mm deep, IP30

Diversity factor: 0.7 and 0.8

Ambient temperature around the switchboard: 35 °C

Cubicle **1**: P(W) of device zone = 580 W

Cubicle **2**: P(W) of device zone = 180 W




Two cubicles with busbar compartment, 800 mm wide, 1000 mm deep, two 300 mm wide ducts, IP30

Diversity factor: 0.7

Ambient temperature around the switchboard: 35 °C

Cubicle **1**: P(W) of device zone = 880 W

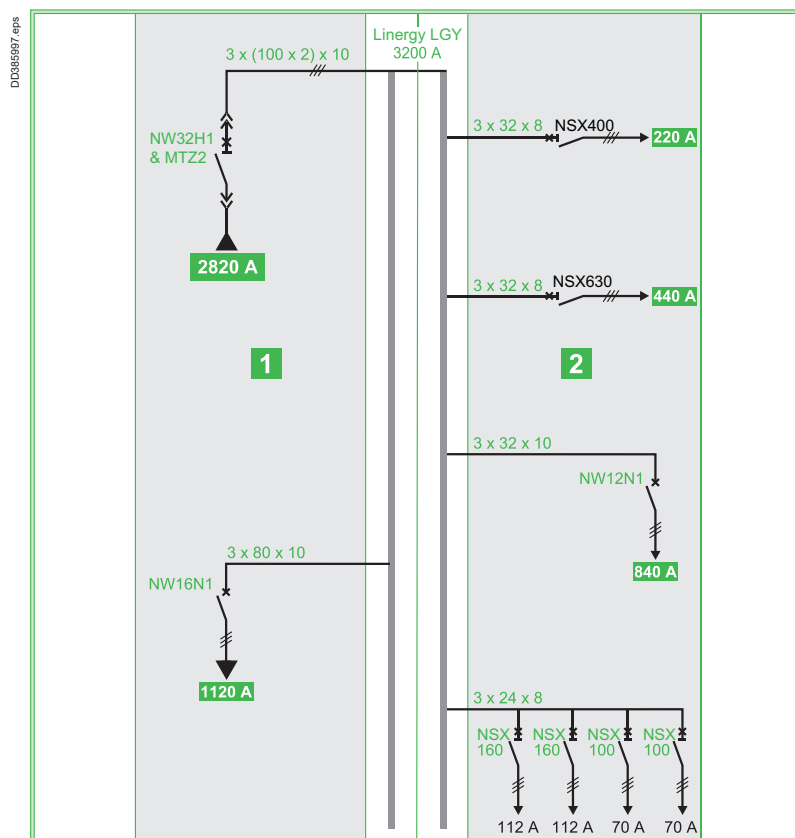Cubicle **2**: P(W) of device zone = 330 W





## Thermal management of switchboards

## Example

## Thermal characteristics of switchboards

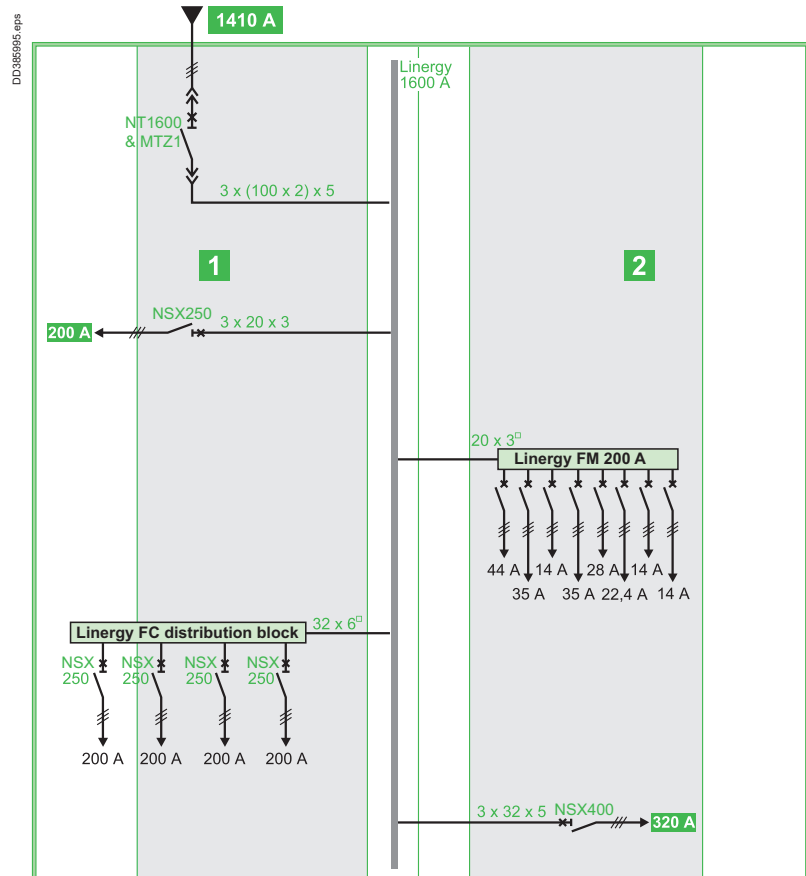
Two cubicles with busbar compartment, 800 mm wide, 1000 mm deep, two 300 mm wide ducts, IP30

Diversity factor: 0.7

Ambient temperature around the switchboard: 35 °C

Cubicle **1**: P(W) of device zone = 580 W

Cubicle **2**: P(W) of device zone = 180 W



## Application of the diversity factor

In the configuration below, the standardised diversity factor (K div.) for a total of 14 outgoing circuits is 0.6, i.e. 60 % of In for each outgoing circuit. Schneider Electric prefers a more conservative approach and therefore divides the installation into four main circuits:

- ComPacT NSX250
- 200 A Linergy FM: 8 outgoers → K div. = 0.7
- Linergy FC: 4 outgoers → K div. = 0.8
- ComPacT NSX400.

1 ComPacT NSX250 + 1 Linergy FM 200 A + 1 Linergy FC + 1 ComPacT NSX400 → 4 outgoers, i.e. a diversity factor of 0.8.

As a result, the current flowing in each circuit is at least 70 % and up to 80 % of In.

## Calculation of the power dissipated by devices in the incoming cubicle

Dissipated power of the NT1600 & MTZ1 indicated by the manufacturer: 460 W. The power dissipated by the connections is approximately 30 % of the device P(W):

$$0.3 \times 460 = 138 \text{ W.}$$

Power of circuit breaker + connections = 460 + 138 = 598 W at 1600 A.

For  $I^2$  (the Watts are proportional to the square of the current) at 1410 A (In of the incoming device):

Dissipated power of the ComPacT NSX250 indicated by the manufacturer: 42 W.

Dissipated power of the connections:  $0.3 \times 42 = 12.6 \text{ W.}$

Power of circuit breaker + connections = 42 + 12.6 = 54.6 W at 250 A.

For 200 A (the tested value):

$$\frac{54.6}{250^2} \times 200^2 = 35 \text{ W}$$

Dissipated power of the Linergy FC and its four ComPacT NSX250 circuit breakers:

$$4 \times 35 \text{ W (same calculation as above)} = 140 \text{ W}$$

Sum of the dissipated power in the incoming cubicle:

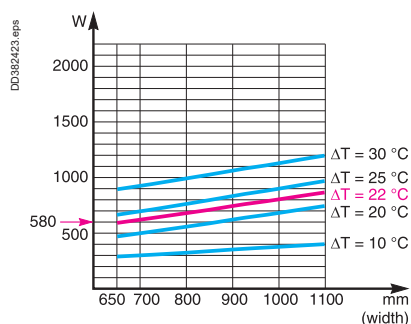
$$P(W) = 405 + 35 + 140 = 580 \text{ W}$$

# Thermal management of switchboards

## Example

### Thermal characteristics of switchboards

Once the dissipated power of the devices has been determined and the enclosure with its IP selected, transfer the results (sum of the dissipated power and width of the device zone) to the chart corresponding to the enclosure IP.



Draw a line parallel to the others on the chart and read the corresponding difference in temperature.

For the given example, the heat rise is 22 °C at mid-height in the enclosure.

The internal temperature = external temperature + heat rise

$$= 35\text{ °C} + 22\text{ °C} = 57\text{ °C}$$

57 °C < 60 °C stipulated by the standard, i.e. the result is acceptable for an IP3 cubicle.

This gives roughly: Internal temperature = 60 °C at mid-height in the enclosure for a low IP value.

Internal temperature = 70 °C at mid-height in the enclosure for a high IP value.

## Thermal management of switchboards

## Charts

## Thermal characteristics of switchboards

Test conditions: the cubicle is on the floor against a wall, the indicated internal heat rise is that measured at mid-height in the enclosure.

For the enclosures not mentioned on the previous pages, use the equation:

$$\Delta T = \frac{P}{S \times K}$$

**ΔT:** internal temperature - external temperature

**P:** power dissipated by the devices, connections and busbars (in Watts)

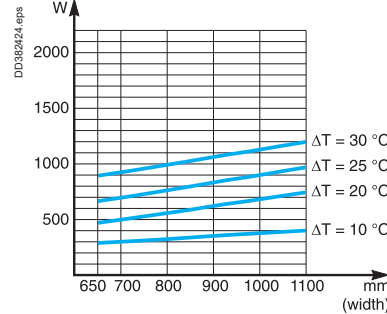
**S:** total free surface area of the enclosure (expressed in m<sup>2</sup>)

**K:** thermal-conduction coefficient of the material (W/m<sup>2</sup> °C)


**K = 5.5 W/m<sup>2</sup> °C for painted sheet metal.**

**Note:** the dissipated power of each device is provided by the manufacturer. Add approximately 30 % to account for the connections and the busbars.

IP3X cubicle, 400 mm deep




IP3X cubicle, 600 mm deep

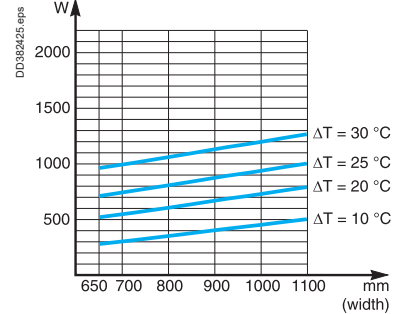


PrismaSeT P Active has been tested in a laboratory for a seismic withstand. The switchboards have been tested according to the standards IEC60068-3-3 & 2-57.

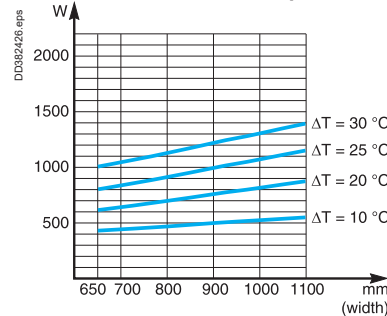
IP3X cubicle, 800 mm deep




IP3X cubicle, 1000 mm deep

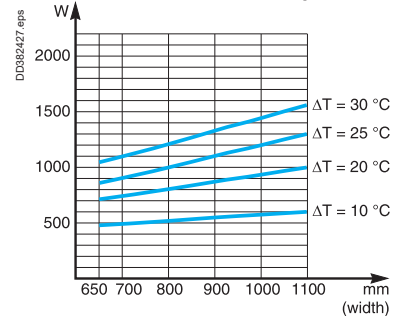


IP55 cubicle, 400 mm deep

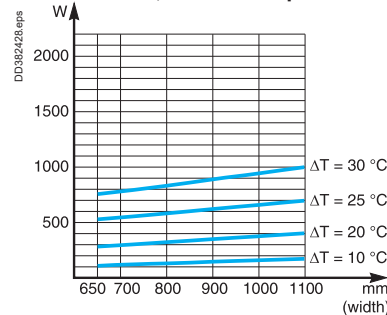


IP55 cubicle, 600 mm deep

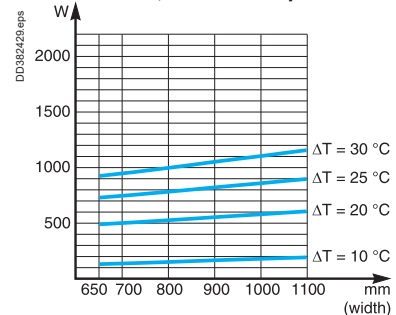

IP55 cubicle, 800 mm deep

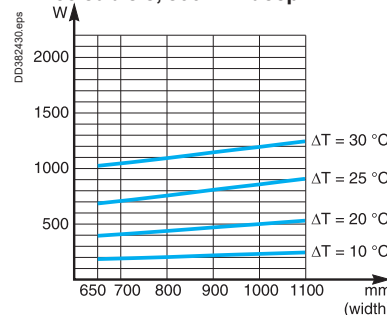

IP55 cubicle, 1000 mm deep

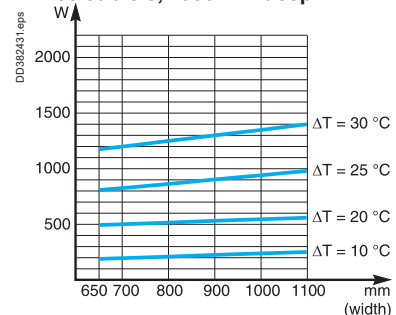

## Thermal management of switchboards

## Ventilation

## Thermal characteristics of switchboards

The air enters the lower section via the fans and exits the upper section:

- through a ventilated roof
- or through a ventilation opening.

The air throughput of the fans is determined by the equation:

$$D = 3.1 \times \left( \frac{P}{\Delta T} - KS \right)$$

The chart below can be used to determine the necessary throughput, based on the dissipated power, the difference in temperature (internal - external) and the exposed surface area of the enclosure.

**Example**

Consider an IP3X cubicle, 650 mm wide and 400 mm deep, containing components (devices, connections, busbars, etc.) dissipating 1000 W.

The ambient temperature around the cubicle is 50 °C.

Given that the average temperature at mid-height should not exceed 60 °C, the difference in temperature  $\Delta T$  is equal to 60 - 50 = 10 °C.

The exposed surface of the cubicle (non adjacent to a wall or other cubicle) is 4.46 m<sup>2</sup>.

(back = 1.3 m<sup>2</sup>, front = 1.3 m<sup>2</sup>, roof = 0.26 m<sup>2</sup>, side panels = 1.6 m<sup>2</sup>).

What is the necessary throughput of the ventilation system?

The throughput can be calculated as:

$$D = 3.1 \times \left( \frac{1000}{10} - 5.5 \times 4.46 \right)$$

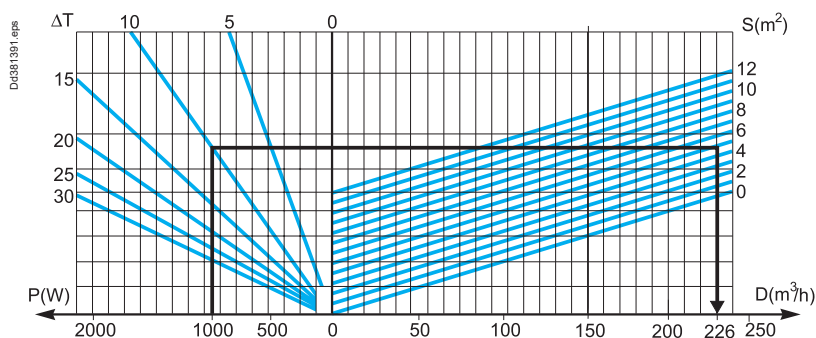
$D = 234 \text{ m}^3/\text{h}$ .

In the range of PrismaSeT P Active accessories, select a system with a throughput of 300 m<sup>3</sup>/h.

Ref: **LVS08710**

In the duct 150mm & 300mm = no need cross members

In the duct 400mm without devices = no need cross members

**Calculation data**

**P:** power dissipated by the devices, connections and busbars (in Watts)

**Pr:** power of the heating resistor (in Watts)

**Tm:** maximum internal temperature in the device zone (in °C)

**Ti:** average internal temperature (in °C)

**Te:** average external temperature (in °C)

$\Delta T_m = T_m - T_e$

$\Delta T = T_i - T_e$

**S:** total free surface area of the enclosure (expressed in m<sup>2</sup>)

**K:** thermal-conduction coefficient of the material (W/m<sup>2</sup> °C)

$K = 5.5 \text{ W/m}^2 \text{ °C}$  for painted sheet metal

**D:** ventilation throughput (in m<sup>3</sup>/h)

**Note:** The dissipated power of each device is provided by the manufacturer. Add approximately 30 % to account for the connections and the busbars.



# Thermal management of switchboards

## Heating

### Thermal characteristics of switchboards


The heating resistor, placed in the bottom of the switchboard, maintains the internal temperature 10 °C higher than the external temperature. When the switchboard is not in operation, the heater compensates the dissipated power normally emitted by the switchboard.

The power of the heating resistor is calculated:


■ using the equation:  $P_r = (\Delta T \times S \times K) - P$

■ or using the charts below, based on the exposed surface area of the enclosure and the desired difference in temperature.

**Chart to determine the heating resistor for small wall-mounted enclosures (exposed surfaces  $\leq 1 \text{ m}^2$ )**

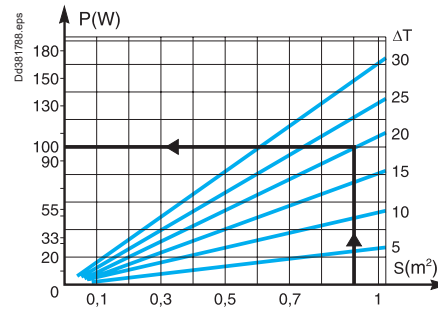

**Chart to determine the heating resistor for all types of enclosures and cubicles**

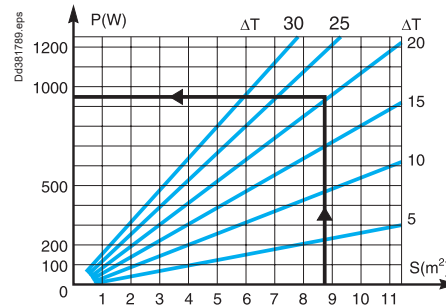

#### Calculation data

**P:** power dissipated by the devices, connections and busbars (in Watts)

**P<sub>r</sub>:** power of the heating resistor (in Watts)

**T<sub>m</sub>:** maximum internal temperature in the device zone (in °C)

**T<sub>i</sub>:** average internal temperature (in °C)

**T<sub>e</sub>:** average external temperature (in °C)

$\Delta T_m = T_m - T_e$

$\Delta T = T_i - T_e$

**S:** total free surface area of the enclosure (expressed in  $\text{m}^2$ )

**K:** thermal-conduction coefficient of the material ( $\text{W}/\text{m}^2 \text{ } ^\circ\text{C}$ )

**K = 5.5  $\text{W}/\text{m}^2 \text{ } ^\circ\text{C}$  for painted sheet metal**

**D:** ventilation throughput (in  $\text{m}^3/\text{h}$ ).

**Note:** The dissipated power of each device is provided by the manufacturer.  
Add approximately 30 % to account for the connections and the busbars.

# PrismaSeT P Active Seismic

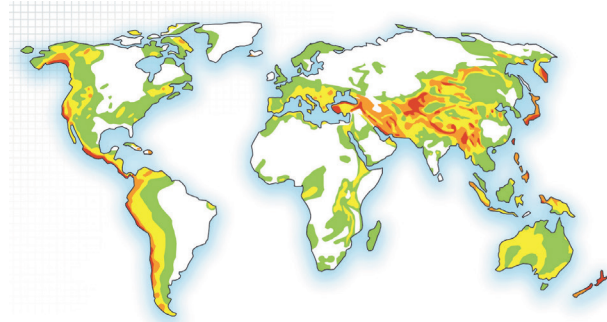
## Specific application

Specific application

## Seismic zone

Around the world can be found different zones with a specific seismic risk.

These zones have been classified according to the Uniform Building Code (UBC).



Zone 0

Zone 1

Zone 2

Zone 3

Zone 4

## Switchboard qualification

Tests are carried out on switchboards to ensure that they operate correctly (structural and functional integrity) under severe earthquake conditions and meet specific safety requirements.

The tests carried out to qualify these switchboards are described in the international standard IEC 60068-3-3.

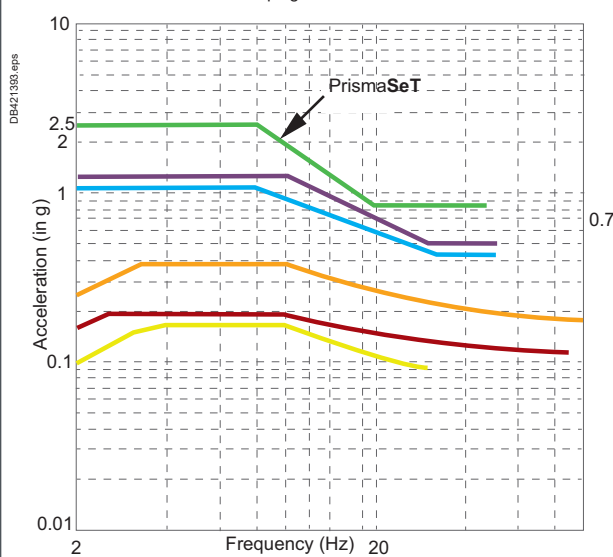
## Classification

From weak to strong earthquakes, PrismaSeT P Active has been tested in the following ground accelerations to guarantee the right performance on seismic risk.


| IEC 60068 -3-3<br>Ground acceleration | Seismic characteristics              |                         |               |          |
|---------------------------------------|--------------------------------------|-------------------------|---------------|----------|
| References                            | General description                  | Richter scale magnitude | MSK Intensity | UBC Zone |
| AG2                                   | Intensity from weak to average       | < 5.5                   | < VIII        | 0        |
| AG3                                   | Intensity from average to strong     | 5.5 to 7.0              | VIII to IX    | 1 2 3    |
| AG5                                   | Intensity from strong to very strong | > 7.0                   | > IX          | 4        |

PrismaSeT P Active is compliant up to level AG5 from IEC 60068-3-3 (2.5 g) :

Compare PrismaSeT switchboard performances with seismic standards  
Damping 5% - horizontal



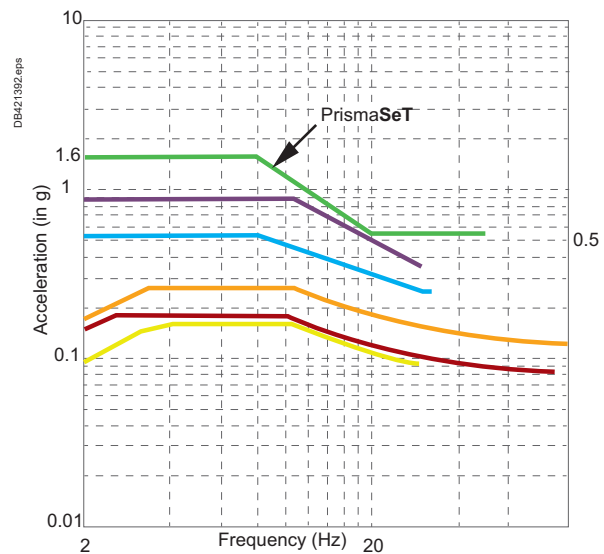Compare PrismaSeT switchboards performances with seismic standards  
Damping 5% - vertical



| Country            | Standard                  | Parameters                                                                                               |
|--------------------|---------------------------|----------------------------------------------------------------------------------------------------------|
| PrismaSeT P Active | IEC60068-3-3              | Up to level AG5                                                                                          |
| Russia             | GOST 17516.1-90           | Civil Market (Seismic intensity 8, all installation levels) or (Up to Seismic Intensity 9, Level 1 only) |
| Chile              | ENDESA 1986               | All seismic categories                                                                                   |
| Turkey             | Seismic Turkish Code 2009 | All seismic zones, all site class                                                                        |
| Greece             | EAK 2000                  | All soil types, Worst case                                                                               |
| Australia          | AS1170                    | All soil types, Worst case                                                                               |
| UBC                | 1997-AC156                | Zone 4 - Ground Level                                                                                    |

## PrismaSeT P Active Seismic

## Seismic kit

## Specific application

## Reinforcement

PrismaSeT P Active seismic cubicles are 2.5 g compliant.

Special parts have been created, specific reinforced side panels and bottom reinforcement brackets.

## Reinforced side panels

Ref: LVS08765D

To respect seismic withstand, use side panels in IP55 version (even with an IP30 switchboard).



## Seismic reinforcement brackets

Ref: LVS08710

Foot part to be added in each bottom angle to reinforce the structure.



## Seismic Kit with cross-members

With ducts 150 mm & 300 mm = cross-members not needed

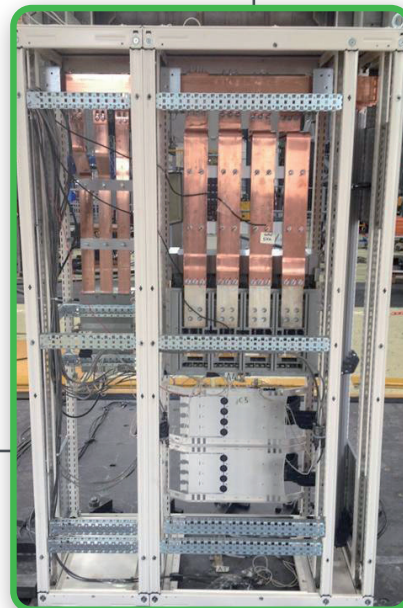
With duct 400 mm without devices = cross-members not needed

## For the cubicles

Ref: LVS03587 x2 or LVS08774 x1

- >1 cross-member at the top, on the rear upright
- >1 cross-member in the middle, on the rear upright
- >2 cross-members at the bottom, on the rear uprights.

**Note :** Cross-members must be added in a rear compartment in case of depth 1000 mm.



## PrismaSeT P Active Seismic

## Installation conditions

## Specific application

## PrismaSeT P Active cubicle frames

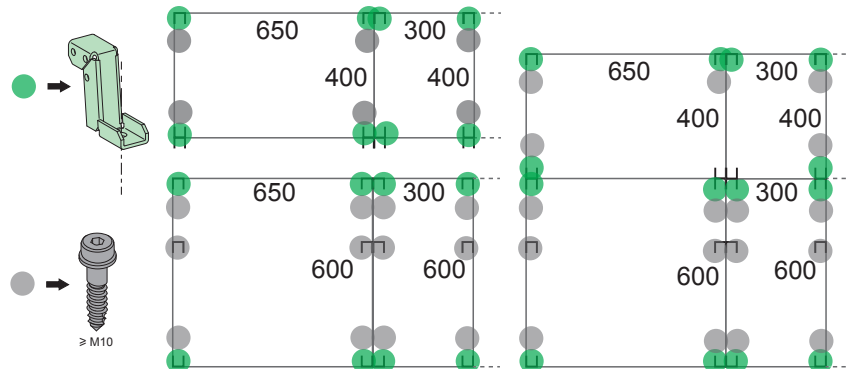
PrismaSeT P Active cubicle frames have to be assembled according to the mounting instructions (04696505) and must respect the tightening torque and association screws position.

Functional units have to be assembled according to the mounting instructions supplied with each reference.

## Fixing points to ground

## Structure fixing points

## Customer ground points



Tightening torque = 50 Nm with customer M10 screws

**Nota :** cubicle of the same switchboard must have the same depth

Refer to QGH13690 leaflet for compliant assembly

## Sizes to respect

Dimensional specifications have to be taken into account for the switchboard sizes and busbar ratings.

## Switchboard sizes:

- > Minimum switchboard width (1) = 1200 mm
- > Minimum cubicle depth = 400 mm
- > Height = 2000 mm

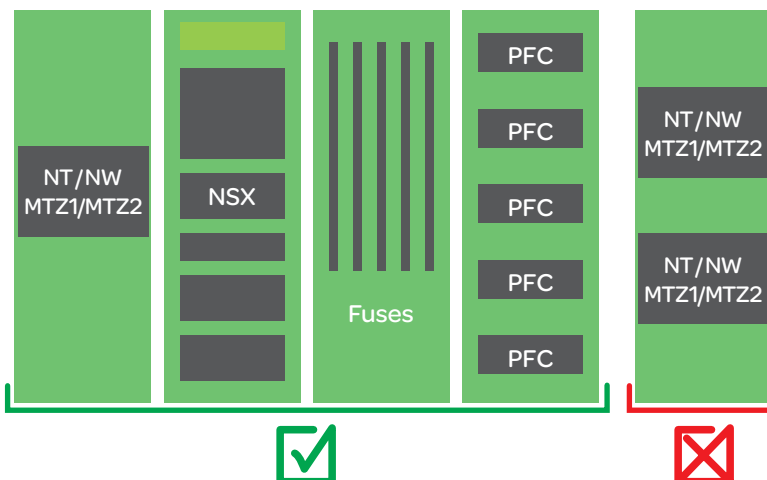
**Nota :** Seismic switchboards must not be installed with any plinth.

(1) Switchboard must be equipped with horizontal busbars

## Maximum busbar ratings:

|                         | 3P         | 4P         |
|-------------------------|------------|------------|
| Horizontal Linergy BS   | 2b 80 x 10 | 2b 80 x 10 |
| Horizontal Linergy LGYE | LGYE 4000  | LGYE 4000  |

## Devices installation limit



**Nota :** Seismic cubicles not not exceed the unit weight of 350 kg, devices and busbars included.

☒ Yes

- > Cable entry : top/bottom
- > Transparent door
- > IP 30/31
- > IP55

☐ No

- > Connection to busways
- > Plinth 100 mm or 2 x 100 mm

## NOTICE

## HAZARD OF STRUCTURAL FAILURE

Seismic cubicles must have the same depth. Plinths are not allowed in seismic configurations

**Failure to follow these instructions can result in equipment damage**

# Selection guide



Selection guide

---

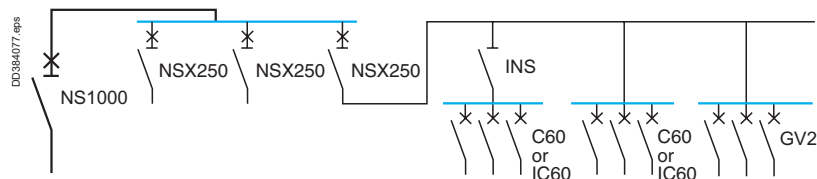
Select a cubicle configuration

D-2

D

# Select a cubicle configuration


Starting with the electrical diagram:  
IP30 switchboard



Prisma P Functional units


## Install the incomer

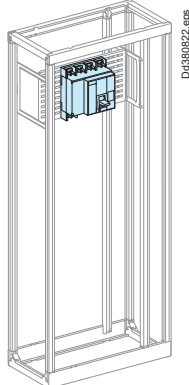See page E-2




Order  
■ connection components  
■ mounting plates and front plates  
■ busbar connections.


### 1 Front conn. using cables



### 2 Device installation



### 3 Linergy LGY BB conn.



| Device                       | Fixed device                     |
|------------------------------|----------------------------------|
| Arc chute screen             | NS630b/1000 3P 33596<br>4P 33597 |
| Vertical connection adapters | 3P 33642<br>4P 33643             |
| Front connection cover       | 04851                            |


| Mounting Device           | Front connection with cables    |
|---------------------------|---------------------------------|
|                           | Fixed device                    |
|                           | NS630b/1000 NS1250/1600         |
| Number of devices per row | 1 1                             |
| No. of vertical modules   | 12 14                           |
| Mounting plates           | 03482 03482                     |
| Front plates              | upstream 03802 [2] 03804 [4]    |
| [No. of vertical modules] | with cut-out 03690 or 03701 [7] |
|                           | downstream 03803 [3] 03803 [3]  |

| Device                       | Fixed device                                      |
|------------------------------|---------------------------------------------------|
| Connection type              | NS630b/1250 NS1600                                |
| Busbars connection           | Front connection delivered with the device        |
|                              | For Linergy LGY busbars: prefabricated connection |
|                              | 3P 04485 04487                                    |
|                              | 4P 04486 04488                                    |
| Cover for busbars connection | 04926                                             |
| Linergy LGY, LGYE, BS        |                                                   |

Prisma P Functional units


## Install the Compact devices

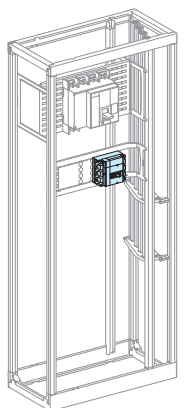See page E-20



Order  
■ mounting plates and front plates  
■ busbar connections  
■ connection accessories.


### 1 Installation



### 2 Linergy LGY BB conn.



### 3 Connection




| Device                    | Toggle                           |
|---------------------------|----------------------------------|
|                           | NSX100/250, Vigi NSX100/250      |
| Number of device per row  | 3P 1 4P 1                        |
| No. of vertical modules   | 3 4                              |
| Mounting plates           | 03411 03412                      |
| Front plates              | with cut-out 03604 [3] 03606 [4] |
| [No. of vertical modules] |                                  |

| Device                   | Linergy LGY Toggle          |
|--------------------------|-----------------------------|
|                          | NSX100/250, Vigi NSX100/250 |
|                          | 3P 4P                       |
| Prefabricated connection | 04423 04424                 |


| Device                    | Toggle                                               |
|---------------------------|------------------------------------------------------|
|                           | NSX100/160 Vigi NSX100/160 NSX250 Vigi NSX250        |
| Number of device per row  | 3/4 3/4 3/4 3/4                                      |
| No. of vertical modules   | 6 8 7 9                                              |
| Mounting plates           | 03420 03420 03420 03420                              |
| Front plates              | with cut-out 03243 [5] 03241 [7] 03243 [5] 03241 [7] |
| [No. of vertical modules] | downstream 03801 [1] 03801 [1] 03802 [2] 03802 [2]   |

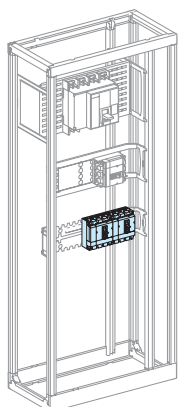Prisma P Functional units



Order  
■ mounting plates and front plates  
■ distribution block  
■ connection accessories.

### 1 Installation



### 2 Linergy LGY BB conn.



### 3 Connection



| Device                    | Toggle                                               |
|---------------------------|------------------------------------------------------|
|                           | NSX100/160 Vigi NSX100/160 NSX250 Vigi NSX250        |
| Number of device per row  | 3/4 3/4 3/4 3/4                                      |
| No. of vertical modules   | 6 8 7 9                                              |
| Mounting plates           | 03420 03420 03420 03420                              |
| Front plates              | with cut-out 03243 [5] 03241 [7] 03243 [5] 03241 [7] |
| [No. of vertical modules] | downstream 03801 [1] 03801 [1] 03802 [2] 03802 [2]   |

| Device                                           | Linergy LGY Toggle                              |
|--------------------------------------------------|-------------------------------------------------|
|                                                  | NSX100/160, Vigi NSX100/160 NSX250, Vigi NSX250 |
|                                                  | 3P 4P 3P 4P                                     |
| Number of devices                                | 4 3 4 3                                         |
| Linergy FC distribution blocks (with connection) | 04403 04404 04403 04404                         |

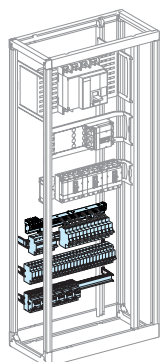
| Device                                 | Toggle                                          |
|----------------------------------------|-------------------------------------------------|
|                                        | NSX100/160, Vigi NSX100/160 NSX250, Vigi NSX250 |
|                                        | 3P 4P 3P 4P                                     |
| Front connection long terminal shields | LV429517 LV429518 LV429517 LV429518             |
| Rear connection short terminal shields | LV429515 LV429516 LV429515 LV429516             |

# PrismaSeT P Active - Selection guide

## Select a cubicle configuration

www.se.com

### Install the modular devices




DD385315 eps

Order the mounting plates and front plates taking into account:

- supply to the rows
- cable running.


#### 1 Acti 9

See page E-61



#### 2 GV2 circuit breaker

See page E-58



DD381919 eps

| Device                        | All modular devices | Modular devices ≤ 40 A |
|-------------------------------|---------------------|------------------------|
| Rail length (modules of 9 mm) | 48                  | 48                     |
| No. of vertical modules       | 4                   | 3                      |
| Rail (48 modules of 9 mm)     | 03401               | 03401                  |
| Modular front plates          | 03204 [4]           | 03203 [3]              |
| Blanking plate strip          | 03220               | 03220                  |
| divisible                     | 03221               | 03221                  |

| Device                     | Circuit breaker       | GV3       |
|----------------------------|-----------------------|-----------|
| No. of vertical modules    | GV2RT - GV2ME - GV2LE | 5         |
| Useful length of rail (mm) | 432                   |           |
| Modular rail (adjustable)  | 03401                 | 03402     |
| Front plates with cut-out  | 03203 [3]             | 03205 [5] |
| [No. of vert mod]          |                       |           |

Linery FH comb busbar see page <?> to <?>

Cable running see page <?>

### Determine the size of the switchboard

- count the number of modules occupied
- determine the number of cubicles
- order the additional plain front plate.

32 modules

1 cubicle

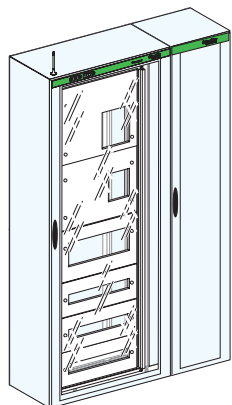
Plain front plate  
See page F-23

The capacity of a cubicle is 36 modules.

| Device            | Plain front plate W = 500 mm |            |            |            |            |            |
|-------------------|------------------------------|------------|------------|------------|------------|------------|
|                   | H = 50 mm                    | H = 100 mm | H = 150 mm | H = 200 mm | H = 250 mm | H = 300 mm |
| [No. of vert mod] | [1]                          | [2]        | [3]        | [4]        | [5]        | [6]        |
| Cat. no           | 03801                        | 03802      | 03803      | 03804      | 03805      | 03806      |

### Select the enclosures

See page <?>



DD380827 eps

#### 1 Frameworks

#### 2 Hinged front plate support frame

#### 3 Doors

#### 4 Rear panels

#### 5 Side panels

#### 6 Roofs

#### 7 Plinth, gland plates, finishing parts, etc.

| Device     | 300   | 400   | 650   | 800   | 800 (650 + 150) |
|------------|-------|-------|-------|-------|-----------------|
| Base frame |       |       |       |       |                 |
| Cat. no    | 08403 | 08404 | 08406 | 08408 | 08407           |

| Device                           | 400   | 650   |
|----------------------------------|-------|-------|
| Hinged front plate support frame |       |       |
| Cat. no                          | 08564 | 08566 |

| Device           | W = 300 | W = 400 | W = 650 | W = 800 |
|------------------|---------|---------|---------|---------|
| Plain door       | 08513   | 08514   | 08516   | 08518   |
| Transparent door | -       | 08534   | 08536   | 08538   |

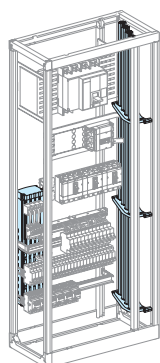
| Dimensions  | W = 300 mm | W = 400 mm | W = 650 mm | W = 800 mm |
|-------------|------------|------------|------------|------------|
| Rear panels | 08733      | 08734      | 08736      | 08738      |

| Dimensions  | D = 400 mm | D = 600 mm |
|-------------|------------|------------|
| Side panels | 08750      | 08760      |

| Dimensions | W = 300 mm | W = 400 mm | W = 650 mm | W = 800 mm |
|------------|------------|------------|------------|------------|
| Plain roof | 08433      | 08434      | 08436      | 08438      |
| D = 400 mm |            |            |            |            |
| Plain roof | 08633      | 08634      | 08636      | 08638      |
| D = 600 mm |            |            |            |            |

### Plan the distribution system


See page <?>



DD385317 eps

#### Linergy LGY busbars


#### 1 See page G-4



DD380880 eps

#### 2 Linergy BW busbars

See page G-14



DD380881 eps

| Intensity (A) | Linergy LGY profiles |         | Number of busbars supports |    |    |    |    |    |    |    |    |
|---------------|----------------------|---------|----------------------------|----|----|----|----|----|----|----|----|
|               | for table<br>IP ≤ 31 | IP > 31 | Icw (kA rms/1s)            | 25 | 30 | 40 | 50 | 60 | 65 | 75 | 85 |
| 630           | 04502                |         |                            |    |    |    |    |    |    |    |    |
|               |                      | 04503   |                            |    |    |    |    |    |    |    |    |
| 800           | 04503                |         |                            |    |    |    |    |    |    |    |    |
|               |                      | 04504   |                            |    |    |    |    |    |    |    |    |
| 1000          | 04504                |         |                            |    |    |    |    |    |    |    |    |

| Designation C  | at. No. |
|----------------|---------|
| Busbar support | 04851   |

| Linergy BW busbars | 160 A             | 250 A | 400 A | 630 A |
|--------------------|-------------------|-------|-------|-------|
| 3P                 | W = 1000 mm 04111 | 04112 | 04113 | 04114 |
|                    | W = 1400 mm 04116 | 04117 | 04118 | 04119 |
| 4P                 | W = 1000 mm 04121 | 04122 | 04123 | 04124 |
|                    | W = 1400 mm 04126 | 04127 | 04128 | 04129 |

# Functional units

## Contents

## Circuit breakers

|                                                         |      |
|---------------------------------------------------------|------|
| <b>MasterPacT MTZ2</b>                                  |      |
| Cables connection                                       | E-2  |
| Canalis connection                                      | E-4  |
| Dedicated cubicle                                       | E-6  |
| Partial front plate support frames                      | E-8  |
| <b>MasterPacT MTZ1</b>                                  |      |
| Toggle and motor mechanism - Cables connection          | E-10 |
| Dedicated cubicle 3P                                    | E-12 |
| <b>ComPacT NS1600b to 3200</b>                          |      |
| Cables connection                                       | E-14 |
| <b>ComPacT NS630b to NS1600</b>                         |      |
| Canalis connection                                      | E-16 |
| Horizontal mounting                                     | E-17 |
| Dedicated cubicle                                       | E-18 |
| <b>ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX</b> |      |
| NSX 100 to 630 - Horizontal mounting                    | E-20 |
| NSX 400/630 - Vertical mounting                         | E-25 |
| NSX 100 to 630 - Vertical mounting W = 400 mm           | E-30 |
| NSX 100/160/250 - Vertical mounting                     | E-31 |
| <b>ComPacT NSXm up to 160</b>                           |      |
| Horizontal mounting, vertical mounting, modular devices | E-35 |

## Switch-disconnectors

|                                      |      |
|--------------------------------------|------|
| <b>ComPacT INS-INV630b to 2500</b>   |      |
| Vertical fixed mounting              | E-39 |
| <b>ComPacT INS-INV250 to 630</b>     |      |
| Horizontal / Vertical fixed mounting | E-40 |

## Source-changeover

|                                                        |      |
|--------------------------------------------------------|------|
| MasterPacT MTZ1 06/16                                  | E-41 |
| MasterPacT MTZ2 08/32                                  | E-42 |
| ComPacT NS630b to 1000                                 | E-49 |
| ComPacT NSX100/630                                     | E-50 |
| ComPacT INS-INV250 to 630 - Front direct rotary handle | E-52 |
| ComPacT INS-INV250 to 630 - Complete assembly device   | E-53 |

## Changeover System

|                     |      |
|---------------------|------|
| <b>TransferPacT</b> |      |
| 32A-100A            | E-54 |
| 80A-16A             | E-55 |

## Fusegear

|             |      |
|-------------|------|
| Fupact ISFL | E-56 |
|-------------|------|

## Fusegear/Switch-disconnector

|             |      |
|-------------|------|
| Fupact ISFT | E-57 |
| Fupact GS   | E-58 |

## Others

|                                                          |      |
|----------------------------------------------------------|------|
| Power factor correction equipment                        | E-59 |
| Industrial control devices                               | E-60 |
| <b>Modular devices</b>                                   |      |
| Acti 9 ≤ 63 A, 80/160 A switchboard incomer              | E-61 |
| Metering (Single-phase and 3-phase kilowatt-hour meters) | E-63 |
| Human-switchboard interface (PowerLogic™ Meters)         | E-64 |







## MasterPacT MTZ2 08 to 32



## Cables connection

Fixed, withdrawable

## Circuit breakers

| Mounting                                                                          |              | Front connection                                                                  |              |                     |               |
|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|--------------|---------------------|---------------|
|  |              |  |              |                     |               |
| Devices                                                                           |              | Fixed device                                                                      |              | Withdrawable device |               |
|                                                                                   |              | MTZ2 08/16                                                                        | MTZ2 20/32   | MTZ2 08/16          | MTZ2 20/32    |
| Number of devices per row                                                         |              | 1                                                                                 | 1            | 1                   | 1             |
| No. of vertical modules (1)                                                       |              | 18                                                                                | 19           | 19                  | 20            |
| Mounting plates                                                                   |              | LVS03500                                                                          | LVS03500     | LVS03500            | LVS03500      |
| Front plates<br>[No. of vertical modules]                                         | upstream     | LVS03804 [4]                                                                      | LVS03805 [5] | LVS03804 [4]        | LVS03805 [5]  |
|                                                                                   | with cut-out | LVS03711 [9]                                                                      | LVS03711 [9] | LVS03710 [10]       | LVS03710 [10] |
|                                                                                   | downstream   | LVS03805 [5]                                                                      | LVS03805 [5] | LVS03805 [5]        | LVS03805 [5]  |
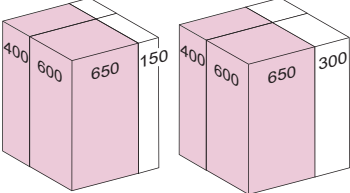
| Mounting                                                                           |              | Rear connection                                                                    |              |                     |               |
|------------------------------------------------------------------------------------|--------------|------------------------------------------------------------------------------------|--------------|---------------------|---------------|
|  |              |  |              |                     |               |
| Devices                                                                            |              | Fixed device                                                                       |              | Withdrawable device |               |
|                                                                                    |              | MTZ2 08/16                                                                         | MTZ2 20/32   | MTZ2 08/16          | MTZ2 20/32    |
| Number of devices per row                                                          |              | 1                                                                                  | 1            | 1                   | 1             |
| No. of vertical modules                                                            |              | 14                                                                                 | 14           | 15                  | 15            |
| Mounting plates                                                                    |              | LVS03500                                                                           | LVS03500     | LVS03500            | LVS03500      |
| Front plates<br>[No. of vertical modules]                                          | with cut-out | LVS03711 [9]                                                                       | LVS03711 [9] | LVS03710 [10]       | LVS03710 [10] |
|                                                                                    | downstream   | LVS03805 [5]                                                                       | LVS03805 [5] | LVS03805 [5]        | LVS03805 [5]  |
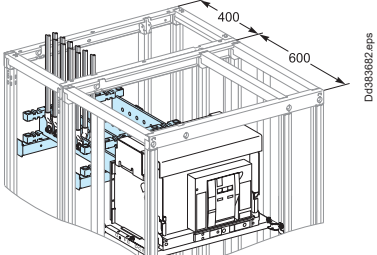
| Connection                                                                          |              | Upstream on incomer                                                                                                                                                      |                                   |
|-------------------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
|  |              |   |                                   |
| Devices                                                                             |              | Fixed device<br>MTZ2 08/32                                                                                                                                               | Withdrawable device<br>MTZ2 08/32 |
| Type of terminals                                                                   |              | Vertical rear connections supplied with the device                                                                                                                       |                                   |
| Connection                                                                          |              | must be made (2)                                                                                                                                                         |                                   |
| Front connection                                                                    | bar supports | 2 x LVS04694 + LVS04678                                                                                                                                                  |                                   |
|                                                                                     | cables cover | LVS04861                                                                                                                                                                 |                                   |
| Rear connection                                                                     | bar supports | 2 x LVS04694                                                                                                                                                             |                                   |
|                                                                                     | cables cover | LVS04863                                                                                                                                                                 |                                   |

(1) For downstream connection with copper.

For downstream prefabricated connection with Linergy LGYE, 1 additional module is required only for MTZ2 3200A. Select downstream plain front plate (LVS03806).




(2) Connection to be made according to the busbar drawings supplied by Schneider Electric.

## MasterPacT MTZ2 08 to 32

## Cables connection

Fixed, withdrawable

## Circuit breakers

| Distribution                                                                                        |                                         | Downstream on Linergy LGY, LGYE or BS busbars                                                     |    |                                                                                                                            |    |                                                                                           |              |              |
|-----------------------------------------------------------------------------------------------------|-----------------------------------------|---------------------------------------------------------------------------------------------------|----|----------------------------------------------------------------------------------------------------------------------------|----|-------------------------------------------------------------------------------------------|--------------|--------------|
|                    |                                         | <br>DD385815.eps |    |                                                                                                                            |    |                                                                                           |              |              |
| Devices                                                                                             |                                         | Fixed and withdrawable<br>MTZ2 08/16                                                              |    | Fixed and withdrawable<br>MTZ2 20/25                                                                                       |    | Fixed and withdrawable<br>MTZ2 32                                                         |              |              |
|                                                                                                     |                                         | 3P                                                                                                | 4P | 3P                                                                                                                         | 4P | 3P                                                                                        | 4P           |              |
| Type of terminals                                                                                   |                                         | Front connections supplied with the device.                                                       |    |                                                                                                                            |    |                                                                                           |              |              |
| <br>DD385818.eps   | For vertical busbar<br>Linergy BS       | Must be made according to the busbar drawings supplied by Schneider Electric.                     |    |                                                                                                                            |    |                                                                                           |              |              |
|                                                                                                     | Connection                              |                                                                                                   |    |                                                                                                                            |    |                                                                                           |              |              |
|                                                                                                     | Joint                                   | -                                                                                                 | -  | Order one joint per phase: 1 joint for busbars, W = 50/60 mm (LVS04640),<br>1 joint for busbars, W = 80/100 mm (LVS04641). |    |                                                                                           |              |              |
|                                                                                                     | Free support                            | 2 x LVS04662<br>For I <sub>cw</sub> ≥ 75 kA rms, add an additional free support LVS04662.         |    |                                                                                                                            |    |                                                                                           |              |              |
|                                                                                                     | Cover                                   | LVS04926 + LVS04927                                                                               |    |                                                                                                                            |    |                                                                                           |              |              |
| <br>DD385817.eps  | For vertical busbar<br>Linergy LGY      | LVS04493                                                                                          |    | LVS04494                                                                                                                   |    | must be made according to the busbar drawings supplied by Schneider Electric.             |              |              |
|                                                                                                     | Joint                                   | LVS04683                                                                                          |    | LVS04684                                                                                                                   |    | -                                                                                         |              |              |
|                                                                                                     | Free support                            | -                                                                                                 |    | -                                                                                                                          |    | 2 x LVS04662<br>For I <sub>cw</sub> ≥ 75 kA rms, add an additional free support LVS04662. |              |              |
|                                                                                                     | Cover                                   | LVS04925 + LVS04928                                                                               |    | LVS04926 + LVS04927                                                                                                        |    |                                                                                           |              |              |
| <br>DD385816.eps | For vertical busbar<br>Linergy LGYE (1) | -                                                                                                 |    | LVS04495                                                                                                                   |    | LVS04496                                                                                  | LVS04497 (2) | LVS04498 (2) |
|                                                                                                     | Joint                                   | -                                                                                                 |    | 3 x LVS04685                                                                                                               |    | 4 x LVS04685                                                                              | 3 x LVS04687 | 4 x LVS04687 |
|                                                                                                     | Cover                                   | LVS04925 + LVS04928                                                                               |    |                                                                                                                            |    |                                                                                           |              |              |

(1) For LGYE 08/25, use a duct W = 150 mm. For LGYE 32/40, use a duct W = 300 mm.

(2) One additional module is required, select LVS03806 plain front plate for downstream.

**Note:** to make measurements:

Install the CTs preferably upstream, on the supply terminal extension bars or install the CTs on the horizontal busbars (busbar connection). In this case, add one module and a plain front plate (LVS03801) or install a Micrologic control unit capable of displaying the values.



Selection of busbars: Linergy LGY &gt; page G-4, Linergy LGYE &gt; page G-5, Linergy BS &gt; page G-6.



## MasterPacT MTZ2 08 to 32



Canalis connection

Fixed, withdrawable

Circuit breakers

| Mounting                                                                          |              | Front connection                                                                  |                                   |                     |                                  |
|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|-----------------------------------|---------------------|----------------------------------|
|  |              |  |                                   |                     |                                  |
| Devices                                                                           |              | Fixed device                                                                      |                                   | Withdrawable device |                                  |
|                                                                                   |              | MTZ2 08/16                                                                        | MTZ2 20/32                        | MTZ2 08/16          | MTZ2 20/32                       |
| Number of devices per row                                                         |              | 1                                                                                 | 1                                 | 1                   | 1                                |
| No. of vertical modules (1)                                                       |              | 27                                                                                | 28                                | 27                  | 28                               |
| Mounting plates                                                                   |              | LVS03500                                                                          | LVS03500                          | LVS03500            | LVS03500                         |
| Front plates<br>[No. of vertical modules]                                         | upstream     | LVS03805 [5]<br>2 x LVS03804 [8]                                                  | 2 x LVS03805 [10]<br>LVS03804 [4] | 3 x LVS03804 [12]   | LVS03805 [5]<br>2 x LVS03804 [8] |
|                                                                                   | with cut-out | LVS03711 [9]                                                                      | LVS03711 [9]                      | LVS03710 [10]       | LVS03710 [10]                    |
|                                                                                   | downstream   | LVS03805 [5]                                                                      | LVS03805 [5]                      | LVS03805 [5]        | LVS03805 [5]                     |

| Mounting                                                                           |              | Rear connection                                                                    |                                |                                |                                |
|------------------------------------------------------------------------------------|--------------|------------------------------------------------------------------------------------|--------------------------------|--------------------------------|--------------------------------|
|  |              |  |                                |                                |                                |
| Devices                                                                            |              | Fixed device                                                                       |                                | Withdrawable device            |                                |
|                                                                                    |              | MTZ2 08/16                                                                         | MTZ2 20/32                     | MTZ2 08/16                     | MTZ2 20/32                     |
| Number of devices per row                                                          |              | 1                                                                                  | 1                              | 1                              | 1                              |
| No. of vertical modules                                                            |              | 16                                                                                 | 16                             | 17                             | 17                             |
| Mounting plates                                                                    |              | LVS03500                                                                           | LVS03500                       | LVS03500                       | LVS03500                       |
| Front plates<br>[No. of vertical modules]                                          | upstream     | LVS03804 [4]<br>+ LVS03803 [3]                                                     | LVS03804 [4]<br>+ LVS03803 [3] | LVS03804 [4]<br>+ LVS03803 [3] | LVS03804 [4]<br>+ LVS03803 [3] |
|                                                                                    | with cut-out | LVS03711 [9]                                                                       | LVS03711 [9]                   | LVS03710 [10]                  | LVS03710 [10]                  |
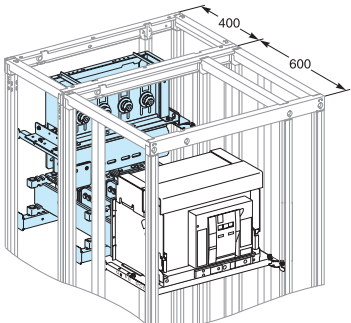
| Connection                                                                          |                | Upstream on incomer                                                                 |            |          |            |            |                                                                                       |                     |            |          |          |
|-------------------------------------------------------------------------------------|----------------|-------------------------------------------------------------------------------------|------------|----------|------------|------------|---------------------------------------------------------------------------------------|---------------------|------------|----------|----------|
|  |                |  |            |          |            |            |  |                     |            |          |          |
| Devices                                                                             |                | Fixed device                                                                        |            |          |            |            |                                                                                       | Withdrawable device |            |          |          |
|                                                                                     |                | MTZ2 08/16                                                                          | MTZ2 20/25 | MTZ2 32  | MTZ2 08/16 | MTZ2 20/25 | MTZ2 32                                                                               | MTZ2 08/16          | MTZ2 20/25 | MTZ2 32  | MTZ2 32  |
| Type of terminals                                                                   |                | Vertical rear connections supplied with the device                                  |            |          |            |            |                                                                                       |                     |            |          |          |
| Canalis support                                                                     |                | LVS03561                                                                            |            |          |            |            |                                                                                       |                     |            |          |          |
| Canalis interface (2)                                                               |                | 3P                                                                                  | 4P         | 3P       | 4P         | 3P         | 4P                                                                                    | 3P                  | 4P         | 3P       | 4P       |
|                                                                                     |                | LVS04715                                                                            | LVS04716   | LVS04725 | LVS04726   | LVS04735   | LVS04736                                                                              | LVS04715            | LVS04716   | LVS04725 | LVS04726 |
| Front connection                                                                    | Bar supports   | 2 x LVS04694 + LVS04678                                                             |            |          |            |            |                                                                                       |                     |            |          |          |
|                                                                                     | Extension bars | must be made (3)                                                                    |            |          |            |            |                                                                                       |                     |            |          |          |
|                                                                                     | Canalis Cover  | LVS04871 + LVS04861                                                                 |            |          |            |            |                                                                                       |                     |            |          |          |
| Rear connection                                                                     | Bar supports   | 2 x LVS04694                                                                        |            |          |            |            |                                                                                       |                     |            |          |          |
|                                                                                     | Extension bars | must be made (3)                                                                    |            |          |            |            |                                                                                       |                     |            |          |          |
|                                                                                     | Canalis Cover  | LVS04871 + LVS04863                                                                 |            |          |            |            |                                                                                       |                     |            |          |          |

(1) For downstream connection with copper.

For downstream prefabricated connection with Linergy LGYE, 1 additional module is required only for MTZ2 3200A. Select downstream plain front plate (LVS03806).

(2) To tight the screws of the Canalis interface use the special tool 87808.




(3) Connection to be made according to the busbar drawings supplied by Schneider Electric.

## MasterPacT MTZ2 08 to 32

Canalis connection

Fixed, withdrawable

Circuit breakers

| Distribution                                                                                        |              | Downstream on Linergy LGY, LGYE or BS busbars                                                            |                 |                                                                                                                                           |                     |                     |                     |
|-----------------------------------------------------------------------------------------------------|--------------|----------------------------------------------------------------------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------------------|---------------------|
|                    |              | <br>DD385815.eps        |                 |                                                                                                                                           |                     |                     |                     |
| Fixed / withdrawable devices                                                                        |              | MTZ2 08/16                                                                                               |                 | MTZ2 20/25                                                                                                                                |                     | MTZ2 32             |                     |
|                                                                                                     |              | 3P                                                                                                       | 4P              | 3P                                                                                                                                        | 4P                  | 3P                  | 4P                  |
| Type of terminals                                                                                   |              | Front connections supplied with the device.                                                              |                 |                                                                                                                                           |                     |                     |                     |
| <br>DD385818.eps   | Connection   | Must be made according to the busbar drawings supplied by Schneider Electric.                            |                 |                                                                                                                                           |                     |                     |                     |
|                                                                                                     | Joint        | -                                                                                                        | -               | Order one joint per phase: 1 joint for busbars, W = 50/60 mm ( <b>LVS04640</b> ), 1 joint for busbars, W = 80/100 mm ( <b>LVS04641</b> ). |                     |                     |                     |
|                                                                                                     | Free support | 2 x <b>LVS04662</b><br>For I <sub>cw</sub> ≥ 75 kA rms, add an additional free support <b>LVS04662</b> . |                 |                                                                                                                                           |                     |                     |                     |
|                                                                                                     | Cover        | <b>LVS04926 + LVS04927</b>                                                                               |                 |                                                                                                                                           |                     |                     |                     |
| <br>DD385817.eps   | Connection   | <b>LVS04493</b>                                                                                          | <b>LVS04494</b> | must be made according to the busbar drawings supplied by Schneider Electric.                                                             |                     |                     |                     |
|                                                                                                     | Joint        | <b>LVS04683</b>                                                                                          | <b>LVS04684</b> | -                                                                                                                                         |                     |                     |                     |
|                                                                                                     | Free support | -                                                                                                        | -               | 2 x <b>LVS04662</b><br>For I <sub>cw</sub> ≥ 75 kA rms, add an additional free support <b>LVS04662</b> .                                  |                     |                     |                     |
|                                                                                                     | Cover        | <b>LVS04925 + LVS04928</b>                                                                               |                 | <b>LVS04926 + LVS04927</b>                                                                                                                |                     |                     |                     |
| <br>DD385816.eps | Connection   | -                                                                                                        | -               | <b>LVS04495</b>                                                                                                                           | <b>LVS04496</b>     | <b>LVS04497 (2)</b> | <b>LVS04498 (2)</b> |
|                                                                                                     | Joint        | -                                                                                                        | -               | 3 x <b>LVS04685</b>                                                                                                                       | 4 x <b>LVS04685</b> | 3 x <b>LVS04687</b> | 4 x <b>LVS04687</b> |
|                                                                                                     | Cover        | <b>LVS04925 + LVS04928</b>                                                                               |                 |                                                                                                                                           |                     |                     |                     |
|                                                                                                     |              |                                                                                                          |                 |                                                                                                                                           |                     |                     |                     |

(1) For LGYE 08/25, use a duct W = 150 mm. For LGYE 32/40, use a duct W = 300 mm.

(2) One additional module is required, select LVS03806 plain front plate for downstream.

**Note:** to make measurements:

Install the CTs preferably upstream, on the supply terminal extension bars or install the CTs on the horizontal busbars (busbar connection). In this case, add one module and a plain front plate (LVS03801) or install a Micrologic control unit capable of displaying the values.




Selection of busbars: Linergy LGY &gt; page G-4, Linergy LGYE &gt; page G-5, Linergy BS &gt; page G-6.

## MasterPacT MTZ2 08 to 40

Dedicated cubicle - W = 650 mm

Fixed, withdrawable

## Circuit breakers

| Mounting                                                                           |                                                                                     | Dedicated cubicle                                                                  |             |                              |             |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------|------------------------------|-------------|
|   |                                                                                     |   |             |                              |             |
| Devices                                                                            |                                                                                     | Fixed device                                                                       |             | Withdrawable device          |             |
|                                                                                    |                                                                                     | MTZ2 08/32                                                                         | MTZ2 40 (2) | MTZ2 08/32                   | MTZ2 40 (2) |
| Number of devices per row                                                          |                                                                                     | 1                                                                                  | (2)         | 1                            | (2)         |
| No. of vertical modules                                                            |                                                                                     | 36                                                                                 | (2)         | 36                           | (2)         |
| Mounting plates                                                                    |                                                                                     | LVS03500                                                                           | (2)         | LVS03500                     | (2)         |
| Front plates<br>[No. of vertical<br>modules]                                       | upstream (1)                                                                        | LVS03808 [12]                                                                      | (2)         | LVS03808 [12]                | (2)         |
|                                                                                    | with cut-out                                                                        | LVS03711 [9]                                                                       | (2)         | LVS03710 [10]                | (2)         |
|                                                                                    | downstream                                                                          | LVS03808 [12] + LVS03803 [3]                                                       | (2)         | LVS03808 [12] + LVS03802 [2] | (2)         |
| Connection                                                                         |                                                                                     | Upstream with bottom cables                                                        |             |                              |             |
|  |                                                                                     |  |             |                              |             |
| Fixed / withdrawable devices                                                       |                                                                                     | MTZ2 08/32                                                                         |             | MTZ2 40 (2)                  |             |
| Type of terminals                                                                  |  | Vertical rear connectors                                                           |             | (2)                          |             |
| Terminal extension bars for connection                                             |  | must be made (3)                                                                   |             | (2)                          |             |
| Terminal extension bar supports                                                    |  | LVS04694 x 2                                                                       |             | (2)                          |             |
| Cables cover                                                                       |                                                                                     | LVS04861                                                                           |             | (2)                          |             |

(1) One or two 3-module front plates for 72 x 72 and 96 x 96 mm measurement devices can be installed just above the cut-out front plate:

■ 2 3-module front plates + 1 plain front plate LVS03806 (6 modules)

(2) Contact Schneider Electric for 4000 A dedicated cubicle.

(3) Connection to be made according to the busbar drawings supplied by Schneider Electric.

Human-switchboard interface &gt; page E-64.






## MasterPacT MTZ2 08 to 40



Dedicated cubicle - W = 650 mm

Fixed, withdrawable

Circuit breakers

| Distribution                                                                                                    | Downstream up links on horizontal busbars<br>Linergy LGYE   Linergy BS            |              |              |             |                             |              |             |
|-----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------|--------------|-------------|-----------------------------|--------------|-------------|
|                                |  |              |              |             |                             |              |             |
| Fixed / withdrawable devices                                                                                    | MTZ2 08/16                                                                        | MTZ2 20/25   | MTZ2 32      | MTZ2 40 (1) | MTZ2 08/25                  | MTZ2 32      | MTZ2 40 (1) |
| Type of terminals<br>          | Front connection                                                                  |              |              |             | Front connection            |              |             |
| Spacing rods for flat bars<br> | LVS04690 x 2                                                                      | LVS04690 x 2 | LVS04690 x 2 | -           | LVS04690 x 2                | LVS04690 x 2 | -           |
| Connection                                                                                                      | Connection must be made (2)                                                       |              |              |             | Connection must be made (2) |              |             |
| horizontal 3200 A<br>mounting hardware                                                                          | -                                                                                 | -            | -            | -           | LVS04637 (3)                | LVS04637 (3) | -           |
| Busbar cover (4)<br>          | LVS04860                                                                          | LVS04860     | LVS04860     | -           | LVS04860                    | LVS04860     | -           |

## Accessories

|                 |  |                                                         |
|-----------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Cross-members   |                                                                                     |                                                                                                                                             |
| Catalog number  | LVS03584                                                                            | LVS03586                                                                                                                                    |
| Characteristics | Set of 2<br>For 650 mm wide and 400 mm deep cubicle                                 | Set of 2<br>W = 200 mm, can be added to the 400 mm cross-members for frameworks that are 600 mm deep. They can also be installed separately |

(1) Contact Schneider Electric for 4000 A dedicated cubicle.

(2) Connection to be made according to the busbar drawings supplied by Schneider Electric.

(3) Catalog number LVS04637 includes 1 connection only. Order 1 connection per phase.





(4) The cover is compulsory behind front plates designed for measurement devices.

## MasterPacT MTZ2 08 to 32

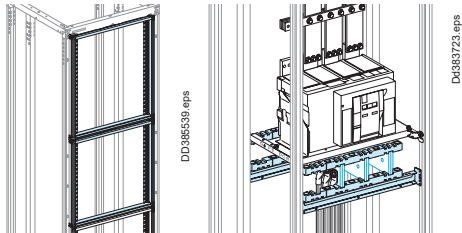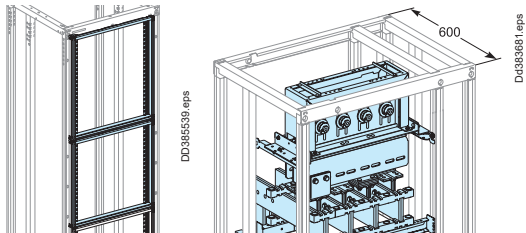Partial front plate support frames

Withdrawable

Circuit breakers



| Mounting                                                                           |              | Front connection with cables in dedicated cubicle                                  |                                         |
|------------------------------------------------------------------------------------|--------------|------------------------------------------------------------------------------------|-----------------------------------------|
|   |              |   |                                         |
| Devices                                                                            |              | Withdrawable device                                                                |                                         |
|                                                                                    |              | <b>MTZ2 08/32</b>                                                                  |                                         |
| No. of vertical modules                                                            |              | <b>36 (3)</b>                                                                      |                                         |
| Mounting plates                                                                    |              | <b>LVS03500</b>                                                                    |                                         |
| Front plates<br>[No. of vertical modules]                                          | upstream     | <b>2 x LVS03806 [12]</b>                                                           |                                         |
|                                                                                    | with cut-out | <b>LVS03709 [10]</b>                                                               |                                         |
|                                                                                    | downstream   | <b>2 x LVS03806 [12]</b>                                                           |                                         |
| 1/3 front plate support frame                                                      |              | <b>LVS08560 (1) + 2 x LVS08562 (2)</b>                                             |                                         |
| Cover                                                                              |              | <b>LVS04861</b>                                                                    |                                         |
| Mounting                                                                           |              | Canalis front connection                                                           |                                         |
|  |              |  |                                         |
| Devices                                                                            |              | Withdrawable device                                                                |                                         |
|                                                                                    |              | <b>MTZ2 08/16</b>                                                                  | <b>MTZ2 20/32</b>                       |
| No. of vertical modules                                                            |              | <b>27 (3)</b>                                                                      | <b>28 (3)</b>                           |
| Mounting plates                                                                    |              | <b>LVS03500</b>                                                                    | <b>LVS03500</b>                         |
| Front plates<br>[No. of vertical modules]                                          | upstream     | <b>3 x LVS03804 [12]</b>                                                           | <b>2 x LVS03805 [10] + LVS03802 [2]</b> |
|                                                                                    | with cut-out | <b>LVS03709 [10]</b>                                                               | <b>LVS03710 [10]</b>                    |
|                                                                                    | downstream   | <b>LVS03804 [4]</b>                                                                | <b>LVS03804 [4]</b>                     |
| 1/3 front plate support frame                                                      |              | <b>LVS08560 (1) + 2 x LVS08562 (2)</b>                                             | <b>LVS08560 (1) + 2 x LVS08562 (2)</b>  |
| Cover                                                                              |              | <b>LVS04861</b>                                                                    | <b>LVS04861</b>                         |

## MasterPacT MTZ2 08 to 32

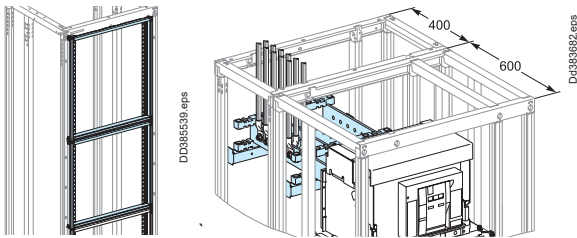Partial front plate support frames

Withdrawable

Circuit breakers

| Mounting                                                                          |  | Rear connection with cables                                                        |                      |
|-----------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------|----------------------|
|  |  |  |                      |
| Devices                                                                           |  | Withdrawable device                                                                |                      |
|                                                                                   |  | <b>MTZ2 08/32</b>                                                                  |                      |
| No. of vertical modules                                                           |  | <b>15 (3)</b>                                                                      |                      |
| Mounting plates                                                                   |  | <b>LVS03500</b>                                                                    |                      |
| Front plates                                                                      |  | -                                                                                  |                      |
| [No. of vertical modules]                                                         |  | upstream                                                                           | -                    |
|                                                                                   |  | with cut-out                                                                       | <b>LVS03709 [10]</b> |
|                                                                                   |  | downstream                                                                         | <b>LVS03804 [4]</b>  |
| 1/3 front plate support frame                                                     |  | <b>LVS08560 (1) + 2 x LVS08562 (2)</b>                                             |                      |

(1) 1/3 front plate support frame 10 modules.

(2) 1/3 front plate support frame 12 modules.

(3) Modularity includes the space of one module between each front plate support frame.






E

## MasterPacT MTZ1 06 to 16

## Cables connection

Toggle, motor mechanism - Fixed, withdrawable

## Circuit breakers

| Mounting                                                                            |                           | Front connection with cables                                                        |                     |                     |                     |
|-------------------------------------------------------------------------------------|---------------------------|-------------------------------------------------------------------------------------|---------------------|---------------------|---------------------|
|    |                           |    |                     |                     |                     |
| Devices                                                                             |                           | Fixed device                                                                        |                     | Withdrawable device |                     |
|                                                                                     |                           | MTZ1 06/10                                                                          | MTZ1 12/16          | MTZ1 06/10          | MTZ1 12/16          |
| Number of devices per row                                                           |                           | 1                                                                                   | 1                   | 1                   | 1                   |
| No. of vertical modules                                                             |                           | 12                                                                                  | 14                  | 13                  | 15                  |
| Mounting plates                                                                     |                           | LVS03484                                                                            | LVS03484            | LVS03483            | LVS03483            |
| Front plates<br>[No. of vertical modules]                                           | upstream                  | LVS03802 [2]                                                                        | LVS03804 [4]        | LVS03802 [2]        | LVS03804 [4]        |
|                                                                                     | with cut-out              | LVS03692 [7]                                                                        | LVS03692 [7]        | LVS03691 [8]        | LVS03691 [8]        |
|                                                                                     | downstream                | LVS03803 [3]                                                                        | LVS03803 [3]        | LVS03803 [3]        | LVS03803 [3]        |
| Mounting                                                                            |                           | Rear connection with cables                                                         |                     |                     |                     |
|    |                           |    |                     |                     |                     |
| Devices                                                                             |                           | Fixed device                                                                        |                     | Withdrawable device |                     |
|                                                                                     |                           | MTZ1 06/16                                                                          | MTZ1 06/16          | MTZ1 06/16          | MTZ1 06/16          |
| Number of devices per row                                                           |                           | 1                                                                                   | 1                   | 1                   | 1                   |
| No. of vertical modules                                                             |                           | 11                                                                                  | 11                  | 11                  | 11                  |
| Mounting plates                                                                     |                           | LVS03484                                                                            | LVS03484            | LVS03483            | LVS03483            |
| Front plates<br>[No. of vertical modules]                                           | upstream                  | LVS03801 [1]                                                                        | LVS03801 [1]        | -                   | -                   |
|                                                                                     | with cut-out              | LVS03692 [7]                                                                        | LVS03692 [7]        | LVS03691 [8]        | LVS03691 [8]        |
|                                                                                     | downstream                | LVS03803 [3]                                                                        | LVS03803 [3]        | LVS03803 [3]        | LVS03803 [3]        |
| Connection                                                                          |                           | Upstream on incomer                                                                 |                     |                     |                     |
|  |                           |                                                                                     |                     |                     |                     |
| Devices                                                                             |                           | Fixed device                                                                        |                     | Withdrawable device |                     |
|                                                                                     |                           | MTZ1 06/10                                                                          | MTZ1 12/16          | MTZ1 06/10          | MTZ1 12/16          |
|                                                                                     |                           | 3P                                                                                  | 4P                  | 3P                  | 4P                  |
| Front connection                                                                    | type of terminals         | Front connections supplied with the device                                          |                     |                     |                     |
|                                                                                     | vert. connection adapters | 33642 (1)                                                                           | 33643 (1)           | 33642 (1)           | 33643 (1)           |
|                                                                                     | cable-lug adapters        | Direct                                                                              | 33644 (1) 33645 (1) | Direct              | 33644 (1) 33645 (1) |
|                                                                                     | spacing rods              | -                                                                                   | LVS04691            | -                   | LVS04691            |
|                                                                                     | arc-chute cover           | 47335                                                                               | 47336               | -                   | -                   |
| Rear connection                                                                     | cables cover              | LVS04852                                                                            |                     |                     |                     |
|                                                                                     | type of terminals         | Vertical rear connections supplied with the device                                  |                     |                     |                     |
|                                                                                     | terminal extension bar    | 2 x LVS04693                                                                        |                     |                     |                     |
|                                                                                     | support                   |                                                                                     |                     |                     |                     |
|                                                                                     | cables cover              | LVS04854                                                                            |                     |                     |                     |
|                                                                                     |                           | extension bars must be made (2)                                                     |                     |                     |                     |
| Distribution                                                                        |                           | Downstream on Linergy LGY or BS busbars                                             |                     |                     |                     |
|  |                           |  |                     |                     |                     |
| Devices                                                                             |                           | Fixed device                                                                        |                     | Withdrawable device |                     |
|                                                                                     |                           | MTZ1 06/12                                                                          | MTZ1 16             | MTZ1 06/12          | MTZ1 16             |
|                                                                                     |                           | 3P                                                                                  | 4P                  | 3P                  | 4P                  |
| Type of terminals                                                                   |                           | Front connections supplied with the device                                          |                     |                     |                     |
| Prefabricated connection to busbars                                                 | Linergy LGY               | LVS04475                                                                            | LVS04476            | LVS04477            | LVS04478            |
|                                                                                     | Linergy BS                | must be made (2)                                                                    |                     |                     |                     |
|                                                                                     |                           | add free supports: 2 x LVS04662                                                     |                     |                     |                     |
| Cover for busbars connection                                                        |                           | LVS04926                                                                            |                     |                     |                     |

(1) Vertical connection adapters and cable-lug adapters and CT, are not compatible with input voltage  $\geq 440V$  due to mandatory barriers installation (33648 or 33768)

(2) Connection to be made according to the busbar drawings supplied by Schneider Electric.

**Note:** to make measurements: install the CTs on the horizontal busbars (busbar connection); in this case, an additional module is required; add a plain front plate (LVS03801) or install a Micrologic control unit capable of displaying the values.







Selection of busbars: Linergy LGY &gt; page G-4, Linergy LGYE &gt; page G-5, Linergy BS &gt; page G-6.

## MasterPacT MTZ1 06 to 16

## Canalis connection

Toggle, motor mechanism - Fixed, withdrawable

## Circuit breakers

| Mounting                                                                            |                                | Canalis front connection                                                            |          |          |          |                                                                                       |          |          |          |
|-------------------------------------------------------------------------------------|--------------------------------|-------------------------------------------------------------------------------------|----------|----------|----------|---------------------------------------------------------------------------------------|----------|----------|----------|
|    |                                |    |          |          |          |                                                                                       |          |          |          |
| Devices                                                                             |                                | Fixed device                                                                        |          |          |          | Withdrawable device                                                                   |          |          |          |
|                                                                                     |                                | MTZ1 06/12                                                                          |          | MTZ1 16  |          | MTZ1 06/12                                                                            |          | MTZ1 16  |          |
| Number of devices per row                                                           |                                | 1                                                                                   |          | -        |          | 1                                                                                     |          | -        |          |
| No. of vertical modules                                                             |                                | 17                                                                                  |          | -        |          | 18                                                                                    |          | -        |          |
| Mounting plates                                                                     |                                | LVS03484                                                                            |          | -        |          | LVS03483                                                                              |          | -        |          |
| Front plates<br>[No. of vertical modules]                                           | upstream                       | LVS03804 [4] + LVS03803 [3]                                                         |          | -        |          | LVS03804 [4] + LVS03803 [3]                                                           |          | -        |          |
|                                                                                     | with cut-out                   | LVS03692 [7]                                                                        |          | -        |          | LVS03691 [8]                                                                          |          | -        |          |
|                                                                                     | downstream                     | LVS03803 [3]                                                                        |          | -        |          | LVS03803 [3]                                                                          |          | -        |          |
| Mounting                                                                            |                                | Canalis rear connection                                                             |          |          |          |                                                                                       |          |          |          |
|    |                                |    |          |          |          |                                                                                       |          |          |          |
| Devices                                                                             |                                | Fixed device                                                                        |          |          |          | Withdrawable device                                                                   |          |          |          |
|                                                                                     |                                | MTZ1 06/16                                                                          |          |          |          | MTZ1 06/16                                                                            |          |          |          |
| Number of devices per row                                                           |                                | 1                                                                                   |          |          |          | 1                                                                                     |          |          |          |
| No. of vertical modules                                                             |                                | 16                                                                                  |          |          |          | 16                                                                                    |          |          |          |
| Mounting plates                                                                     |                                | LVS03484                                                                            |          |          |          | LVS03483                                                                              |          |          |          |
| Front plates<br>[No. of vertical modules]                                           | upstream                       | LVS03806 [6]                                                                        |          |          |          | LVS03805 [5]                                                                          |          |          |          |
|                                                                                     | with cut-out                   | LVS03692 [7]                                                                        |          |          |          | LVS03691 [8]                                                                          |          |          |          |
|                                                                                     | downstream                     | LVS03803 [3]                                                                        |          |          |          | LVS03803 [3]                                                                          |          |          |          |
| Connection                                                                          |                                | Upstream on incomer                                                                 |          |          |          |                                                                                       |          |          |          |
|  |                                |                                                                                     |          |          |          |                                                                                       |          |          |          |
| Devices                                                                             |                                | Fixed device                                                                        |          |          |          | Withdrawable device                                                                   |          |          |          |
|                                                                                     |                                | MTZ1 06/12                                                                          |          | MTZ1 16  |          | MTZ1 06/12                                                                            |          | MTZ1 16  |          |
|                                                                                     |                                | 3P                                                                                  | 4P       | 3P       | 4P       | 3P                                                                                    | 4P       | 3P       | 4P       |
| Canalis support                                                                     |                                | LVS03561                                                                            |          |          |          |                                                                                       |          | -        |          |
| Canalis interface (1)                                                               |                                | LVS04703                                                                            | LVS04704 | LVS04703 | LVS04704 | LVS04703                                                                              | LVS04704 | LVS04703 | LVS04704 |
| Front connection                                                                    |                                | Front connections supplied with the device                                          |          |          |          |                                                                                       |          |          |          |
| Type of terminals                                                                   | Canalis/device connection      | LVS04711                                                                            | LVS04712 | -        |          | LVS04711                                                                              | LVS04712 | -        |          |
|                                                                                     | Arc-chute cover                | 47335                                                                               | 47336    | -        |          | -                                                                                     |          | -        |          |
|                                                                                     | Canalis cover                  | LVS04871 + LVS04852                                                                 |          | -        |          | LVS04871 + LVS04852                                                                   |          | -        |          |
| Rear connection                                                                     |                                | Vertical rear connections supplied with the device                                  |          |          |          |                                                                                       |          |          |          |
| Type of terminals                                                                   | Terminal extension bar support | 2 x LVS04693                                                                        |          |          |          |                                                                                       |          | -        |          |
|                                                                                     | Canalis/device connection      | LVS04713                                                                            | LVS04714 | LVS04713 | LVS04714 | LVS04713                                                                              | LVS04714 | LVS04713 | LVS04714 |
|                                                                                     | Cable cover                    | LVS04871 + LVS04854                                                                 |          |          |          |                                                                                       |          |          |          |
| Extension bars                                                                      |                                | must be made (2)                                                                    |          |          |          |                                                                                       |          |          |          |
| Distribution                                                                        |                                | Downstream on Linergy LGY or BS busbars                                             |          |          |          |                                                                                       |          |          |          |
|  |                                |  |          |          |          |  |          |          |          |
| Devices                                                                             |                                | Fixed device                                                                        |          |          |          | Withdrawable device                                                                   |          |          |          |
|                                                                                     |                                | MTZ1 06/12                                                                          |          | MTZ1 16  |          | MTZ1 06/12                                                                            |          | MTZ1 16  |          |
|                                                                                     |                                | 3P                                                                                  | 4P       | 3P       | 4P       | 3P                                                                                    | 4P       | 3P       | 4P       |
| Type of terminals                                                                   |                                | Front connections supplied with the device                                          |          |          |          |                                                                                       |          |          |          |
| Prefabricated connection to busbars                                                 | Linergy LGY                    | LVS04475                                                                            | LVS04476 | LVS04489 | LVS04490 | LVS04477                                                                              | LVS04478 | LVS04491 | LVS04492 |
|                                                                                     | Linergy BS                     | must be made (2)                                                                    |          |          |          |                                                                                       |          |          |          |
| Cover for busbars connection                                                        |                                | add free supports: 2 x LVS04662                                                     |          |          |          |                                                                                       |          |          |          |
|                                                                                     |                                | LVS04926                                                                            |          |          |          |                                                                                       |          |          |          |

(1) To tight the screws of the Canalis interface use the special tool 87808.

(2) Connection to be made according to the busbar drawings supplied by Schneider Electric.

**Note:** to make measurements: install the CTs on the horizontal busbars (busbar connection); in this case, an additional module is required; add a plain front plate (LVS03801) or install a Micrologic control unit capable of displaying the values.

Selection of busbars: Linergy LGY &gt; page G-4, Linergy LGYE &gt; page G-5, Linergy BS &gt; page G-6.





## MasterPacT MTZ1 06 to 16

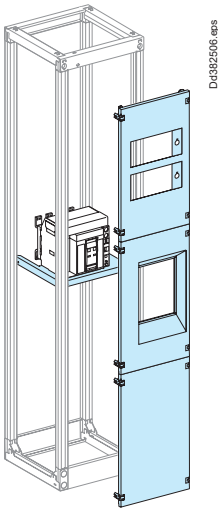Dedicated cubicle 3P - W = 400 mm

Fixed, withdrawable


Circuit breakers

| Mounting                                                                          |                                                                                   |                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------|
|  |  |                     |
| Devices                                                                           | Fixed device                                                                      | Withdrawable device |
|                                                                                   | MTZ1 06 to MTZ1 16                                                                |                     |
| Number of devices per cubicle                                                     | 1                                                                                 | 1                   |
| No. of vertical modules                                                           | 37                                                                                | 37                  |
| Mounting plates                                                                   | LVS03489                                                                          | LVS03488            |
| Front plates                                                                      | with cut-out                                                                      | LVS03698 [11]       |
| [No. of vertical modules]                                                         | upstream (1) cut-out for 72 x 72 or 96 x 96 mm                                    | LVS03723 [13]       |
|                                                                                   | or plain                                                                          | LVS03722 [13]       |
|                                                                                   | downstream (1) plain                                                              | LVS03722 [13]       |

## Measurement-device installation

Measurement devices are installed on a front plate (**LVS03723**) using plastic mounting plates with cut-outs. The front plate can hold:

- six 72 x 72 mm cases
- or four 96 x 96 mm cases + 2 switches
- or two 96 x 96 mm cases + 2 switches (2)

| Number and type of devices per row                                      | Metal front plate with cut-out                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | No. of vertical modules | Plastic mounting plates with cut-out                                                             | Blanking plate or device support                                                                                                                                                           |
|-------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mounting on interface with plastic mounting plates                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                         |                                                                                                  |                                                                                                                                                                                            |
| 3 x <div>72 x 72</div> Vigirex and other devices 72 x 72 without switch |                                                                                                                                                                                                                                                                                                                                                                                                                                  | 13                      |  DD385465 eps |  DD385468 eps<br>To blank-off or install:<br>- from 1 to 4 buttons Ø 16 or 22 mm<br>- 1 device 45 x 45 |
| 2 x <div>96 x 96</div> Power Meter and others devices 96 x 96           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                         | LVS03902                                                                                         | LVS03900                                                                                                                                                                                   |
| 1 x (2) For PM200, 200P, PM5 & PM8 series meters                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                         |                                                                                                  |                                                                                                                                                                                            |
|                                                                         | LVS03723                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                         |                                                                                                  |  DD385467 eps                                                                                           |
|                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                         | LVS03903                                                                                         | LVS03901                                                                                                                                                                                   |
| Characteristics                                                         | <div>■ Installation of three devices (72 x 72 mm cases) using plastic mounting plates (LVS03902) and two devices (96 x 96 mm cases) + a switch using plastic mounting plates (LVS03903) on a hinged front plate (LVS03723)</div> <div>■ The plain mounting plates have knock-outs for lamps, pushbuttons, switches or devices.<br/>Knock-outs for LVS03900: 4 Ø 16 mm, 5 Ø 22 mm or one for a 45 x 45 mm device.<br/>Knock-outs for LVS03901: 4 Ø 16 mm, 5 Ø 22 mm or one for a 45 x 45 or 72 x 72 mm device.</div> |                         |                                                                                                  |                                                                                                                                                                                            |

(1) Hinged or reversible (left or right-hand opening) front plates connect directly to the framework, without a front-plate support frame.




(2) For PM200, 200P, PM5 &amp; PM 8 series meters, use 1 no. blank-off sheet with each meter in a row.



## MasterPacT MTZ1 06 to 16




Dedicated cubicle 3P - W = 400 mm

Fixed, withdrawable

## Circuit breakers

| Connection                                                                                             | Upstream on incomer                                                                                 |                                                                                                    |
|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
|                       | <br>Dd382672_1.eps | <br>Dd382689.eps |
| <b>Devices</b>                                                                                         | <b>Fixed device</b>                                                                                 | <b>Withdrawable device</b>                                                                         |
|                                                                                                        | <b>MTZ1 06 to MTZ1 16</b>                                                                           |                                                                                                    |
| Type of terminals<br> | Front connection                                                                                    | Front connection                                                                                   |
| Arc-chute cover<br>   | 47335                                                                                               | -                                                                                                  |
| Vert. conn. adapters                                                                                   | 33642 (1)                                                                                           | 33642 (1)                                                                                          |
| Cable-lug adapters                                                                                     | 33644 (1)                                                                                           | 33644 (1)                                                                                          |
| Spacing rods<br>      | LVS04691                                                                                            | LVS04691                                                                                           |

| Accessories                                                                                            |                                                                                                     |                                                                                                      |                     |
|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------|
|                                                                                                        | <br>Dd8825 13.eps | <br>Dd8825 14.eps |                     |
|                                                                                                        | <b>W = 400</b>                                                                                      | <b>D = 400</b>                                                                                       | <b>D = 600</b>      |
| 4 cable tie supports for framework                                                                     | LVS08774                                                                                            | LVS08794                                                                                             | LVS08794 + LVS08796 |
| (1) Vertical connection adapters and cable-lug adapters are not compatible with input voltage ≥ 500 V. |                                                                                                     |                                                                                                      |                     |

| Distribution                                                                                             | Downstream on horizontal busbars                                                                    |                                                           | Downstream on vertical busbars                                                                        |
|----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
|                                                                                                          | Linergy LGYE                                                                                        | Linergy BS                                                | Linergy LGY or BS                                                                                     |
|                       | <br>Dd385890.eps |                                                           | <br>Dd385814.eps |
| <b>Fixed / withdrawable devices</b>                                                                      | <b>MTZ1 06 to MTZ1 16</b>                                                                           |                                                           | <b>MTZ1 06 to MTZ1 16</b>                                                                             |
| Type of terminals<br> | Front connection                                                                                    | Front connection                                          | Front connection                                                                                      |
| Support<br>           | 2 x LVS04692 For MTZ1 H1 & H2<br>3 x LVS04692 For MTZ1 H3                                           | 2 x LVS04692 For MTZ1 H1 & H2<br>3 x LVS04692 For MTZ1 H3 | LVS04662                                                                                              |
| Barrier (1)<br>       | LVS04855                                                                                            | LVS04855                                                  | LVS04855                                                                                              |
| Horizontal-busbar connections<br>10 mm thickness bars                                                    | must be made (2)                                                                                    | must be made (2)                                          | -                                                                                                     |
| Vertical-busbar connections                                                                              | -                                                                                                   | LVS04636 (3)                                              | -                                                                                                     |
| Free support                                                                                             | -                                                                                                   | -                                                         | LVS04662                                                                                              |

(1) A barrier must be installed behind front plate LVS03723 when measurement devices are installed.

(2) Connection to be made according to the busbar drawings supplied by Schneider Electric.



(3) Catalog number LVS04636 includes 1 connection only. Order 1 connection per phase.

## ComPacT NS1600b to 3200



## Cables connection



## Fixed

## Circuit breakers

| Mounting                                                                                                      | Front connection                                                                  |
|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| <br>NS1600b      NS2000/3200 |  |

| Devices                                   |              | Fixed device                   |
|-------------------------------------------|--------------|--------------------------------|
|                                           |              | NS1600b      NS2000/3200       |
| Number of devices per row                 |              | 1      1                       |
| No. of vertical modules                   |              | 14      16                     |
| Mounting plates                           |              | LVS03501      LVS03501         |
| Front plates<br>[No. of vertical modules] | upstream     | LVS03802 [2]      LVS03802 [2] |
|                                           | with cut-out | LVS03716 [8]      LVS03716 [8] |
|                                           | downstream   | LVS03804 [4]      LVS03806 [6] |
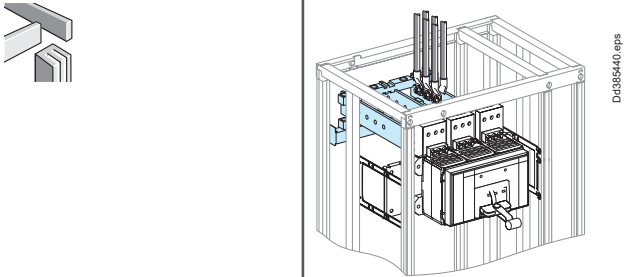
| Connection                                                                         | Upstream on incomer                                                                |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|  |  |
| Fixed devices                                                                      | NS1600b/2500      NS3200                                                           |
| Type of terminals                                                                  | Front connections supplied with the device                                         |
| Vertical-connection adapters    3P                                                 | 33975      33975                                                                   |
| 4P                                                                                 | 33976      33976                                                                   |
| Terminal extension bar support                                                     | LVS04694                                                                           |
| Extension bars                                                                     | must be made (1)                                                                   |
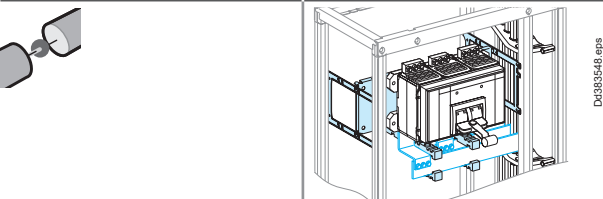
| Distribution                                                                        | Downstream on Linergy LGY, LGYE or BS busbars                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |
| Fixed devices                                                                       | NS1600b      NS2000/2500      NS3200                                                |
| Type of terminals                                                                   | Front connections supplied with the device                                          |
| Busbars connection                                                                  | must be made (1) (2)                                                                |
| Free support for busbars connection                                                 | 2 x LVS04662                                                                        |
| Cover for busbars connection                                                        | LVS04926      LVS04926      LVS04926                                                |
| Additional cover                                                                    | -      LVS04927      LVS04927                                                       |

(1) Connection to be made according to the busbar drawings supplied by Schneider Electric. LGYE: +17.5 mm than BS.

(2) For the connection to flat busbars > 1600 A, order one joint per phase:

- 1 joint for busbars, W = 50/60 mm (LVS04640)
- 1 joint for busbars, W = 80/100 mm (LVS04641)

Note: to make measurements:

- install the CTs on the horizontal busbars (busbar connection); in this case, an additional module is required; add a plain front plate (LVS03801)
- or install a Micrologic control unit capable of displaying the values.






Selection of busbars: Linergy LGY > page G-4, Linergy LGYE > page G-5, Linergy BS > page G-6.

## ComPacT NS630b to NS1600

## Cables connection

Toggle, rotary handle, motor mechanism - Fixed, withdrawable

## Circuit breakers

| Mounting                                                                            |                                | Front connection with cables                                                        |              |                     |              |
|-------------------------------------------------------------------------------------|--------------------------------|-------------------------------------------------------------------------------------|--------------|---------------------|--------------|
|    |                                |    |              |                     |              |
| Devices                                                                             |                                | Fixed device                                                                        |              | Withdrawable device |              |
|                                                                                     |                                | NS630b/1000                                                                         | NS1250/1600  | NS630b/1000         | NS1250/1600  |
| Number of devices per row                                                           |                                | 1                                                                                   | 1            | 1                   | 1            |
| No. of vertical modules                                                             |                                | 12                                                                                  | 14           | 13                  | 15           |
| Mounting plates                                                                     |                                | LVS03482                                                                            | LVS03482     | LVS03483            | LVS03483     |
| Front plates<br>[No. of vertical modules]                                           | upstream                       | LVS03802 [2]                                                                        | LVS03804 [4] | LVS03802 [2]        | LVS03804 [4] |
|                                                                                     | with cut-out                   | LVS03690 or LVS03701 (1) [7]                                                        |              | LVS03691 [8]        | LVS03691 [8] |
|                                                                                     | downstream                     | LVS03803 [3]                                                                        | LVS03803 [3] | LVS03803 [3]        | LVS03803 [3] |
| Mounting                                                                            |                                | Rear connection with cables                                                         |              |                     |              |
|    |                                |    |              |                     |              |
| Devices                                                                             |                                | Fixed device                                                                        |              | Withdrawable device |              |
|                                                                                     |                                | NS630b/1600                                                                         |              | NS630b/1600         |              |
| Number of devices per row                                                           |                                | 1                                                                                   |              | 1                   |              |
| No. of vertical modules                                                             |                                | 10                                                                                  |              | 11                  |              |
| Mounting plates                                                                     |                                | LVS03482                                                                            |              | LVS03483            |              |
| Front plates<br>[No. of vertical modules]                                           | with cut-out                   | LVS03690 or LVS03701 (1) [7]                                                        |              | LVS03691 [8]        |              |
|                                                                                     | downstream                     | LVS03803 [3]                                                                        |              | LVS03803 [3]        |              |
| Connection                                                                          |                                | Upstream on incomer                                                                 |              |                     |              |
|  |                                |                                                                                     |              |                     |              |
| Devices                                                                             |                                | Fixed device                                                                        |              | Withdrawable device |              |
|                                                                                     |                                | NS630b/1000                                                                         | NS1250/1600  | NS630b/1000         | NS1250/1600  |
|                                                                                     |                                | 3P                                                                                  | 4P           | 3P                  | 4P           |
| Front connection                                                                    | Type of terminals              | Front connections supplied with the device                                          |              |                     |              |
|                                                                                     | Vertical connection adapters   | 33642 (3)                                                                           | 33643 (3)    | 33642 (3)           | 33643 (3)    |
|                                                                                     | Cable-lug adapters             | Direct                                                                              | 33644 (3)    | Direct              | 33644 (3)    |
|                                                                                     | Spacing rods                   | -                                                                                   | LVS04691 (3) | -                   | LVS04691 (3) |
|                                                                                     | Arc-chute cover                | 33596                                                                               | 33597        | -                   | -            |
| Rear connection                                                                     | Cables cover                   | LVS04851                                                                            |              | LVS04852            |              |
|                                                                                     | Type of terminals              | Vertical rear connections supplied with the device                                  |              |                     |              |
|                                                                                     | Terminal extension bar support | 2 x LVS04693                                                                        |              |                     |              |
|                                                                                     | Cables cover                   | LVS04853                                                                            |              | LVS04854            |              |
|                                                                                     | Extension bars                 | must be made (2)                                                                    |              |                     |              |
| Connection                                                                          |                                | Downstream distribution via Linergy LGY or BS busbars                               |              |                     |              |
|  |                                |  |              |                     |              |
| Devices                                                                             |                                | Fixed device                                                                        |              | Withdrawable device |              |
|                                                                                     |                                | NS630b/1250                                                                         | NS1600       | NS630b/1250         | NS1600       |
|                                                                                     |                                | 3P                                                                                  | 4P           | 3P                  | 4P           |
| Type of terminals                                                                   |                                | Front connections supplied with the device                                          |              |                     |              |
| Busbars connection                                                                  |                                | For Linergy LGY busbars: prefabricated connection                                   |              |                     |              |
|                                                                                     |                                | LVS04485                                                                            | LVS04486     | LVS04477            | LVS04478     |
|                                                                                     |                                | LVS04487                                                                            | LVS04488     | LVS04491            | LVS04492     |
|                                                                                     |                                | For Linergy BS busbars: must be made (2).                                           |              |                     |              |
| Free support for busbars connection                                                 |                                | For Linergy BS busbars: 2 x LVS04662                                                |              |                     |              |
| Cover for busbars connection                                                        |                                | LVS04926                                                                            |              |                     |              |

(1) For devices with toggle or rotary handle catalog number LVS03690, with a motor mechanism catalog number LVS03701.

(2) Connection to be made according to the busbar drawings supplied by Schneider Electric.

(3) Vertical connection adapters and cable-lug adapters and CT, are not compatible with input voltage  $\geq 500V$  due to mandatory barriers installation (33648 or 33768).**Note:** to make measurements:

■ install a Micrologic control unit capable of displaying the values.

■ or install the CTs on the horizontal busbars; in this case, an additional module is required; add a plain front plate downstream (LVS03801).

Selection of busbars: Linergy LGY &gt; page G-4, Linergy LGE &gt; page G-5, Linergy BS &gt; page G-6.









## ComPacT NS630b to 1000


Horizontal mounting


Toggle, rotary handle - Fixed

Circuit breakers

| Mounting                                                                          | Front connection                                                                  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|  |  |
| <b>Devices</b>                                                                    | <b>Fixed device</b>                                                               |
|                                                                                   | <b>NS630b/1000</b>                                                                |
| Number of devices per row                                                         | 1                                                                                 |
| No. of vertical modules                                                           | <b>7 (1)</b>                                                                      |
| Mounting plates                                                                   | <b>LVS03480</b>                                                                   |
| Front plates with cut-outs                                                        | <b>LVS03687</b>                                                                   |

| Mounting                                                                          | Rear connection                                                                   |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|  |  |
| <b>Devices</b>                                                                    | <b>Fixed device</b>                                                               |
|                                                                                   | <b>NS630b/1000</b>                                                                |
| Number of devices per row                                                         | 1                                                                                 |
| No. of vertical modules                                                           | <b>7 (1)</b>                                                                      |
| Mounting plates                                                                   | <b>LVS03480</b>                                                                   |
| Front plates with cut-outs                                                        | <b>LVS03687</b>                                                                   |

| Connection                                                                          | Upstream on incomer                                                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  |                                                                                                                                                                                             |
| <b>Fixed devices</b>                                                                | <b>NS630b/1000</b>                                                                                                                                                                                                                                                             |
|                                                                                     | <b>3P</b>                                                                                                                                                                                                                                                                      |
| Type of terminals front connection                                                  | Front connections supplied with the device                                                                                                                                                                                                                                     |
| rear connection                                                                     | Vertical rear connections supplied with the device                                                                                                                                                                                                                             |
| Connection transfer assembly for front connection                                   | <b>LVS04483</b>                                                                                                                                                                                                                                                                |
|                                                                                     | <b>LVS04484</b>                                                                                                                                                                                                                                                                |
|                                                                                     | If cubicle w300 mm then 3x300 mm <sup>2</sup> , if cubicle w400 mm then 4x300 mm <sup>2</sup> , same concept for 185 mm <sup>2</sup> .<br>Three 300 mm <sup>2</sup> or six 185 mm <sup>2</sup> cables can be connected per phase with lugs that are not of the two-metal type. |
| Cover rear connection                                                               | -                                                                                                                                                                                                                                                                              |

| Connection                                                                          | Downstream via Linergy LGY, LGYE or BS busbars                                      |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |
| <b>Fixed devices</b>                                                                | <b>NS630b/1000</b>                                                                  |
|                                                                                     | <b>3P</b>                                                                           |
| Type of terminals                                                                   | Front connections supplied with the device                                          |
| Busbars connection                                                                  | For Linergy LGY busbars: prefabricated connection                                   |
|                                                                                     | <b>LVS04473</b>                                                                     |
|                                                                                     | <b>LVS04474</b>                                                                     |
|                                                                                     | must be made. For Linergy LGYE (> page G-13) and Linergy BS busbars                 |
| Cover for busbars connection                                                        | <b>LVS04842</b>                                                                     |
| Arc-chute cover                                                                     | <b>33596</b>                                                                        |
|                                                                                     | <b>33597</b>                                                                        |

(1) Mounting of LVS03480 + connection transfer assembly LVS04483 or LVS04484 needs 8 vertical modules (use of one complementary front plate 1 module LVS03801) at the bottom of the functional unit.



Selection of busbars: Linergy LGY > page G-4, Linergy LGYE > page G-5, Linergy BS > page G-6.

## ComPacT NS630b to 1600

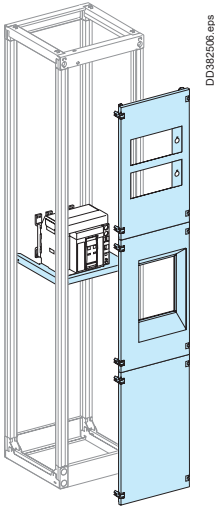Dedicated cubicle - W = 400 mm

Fixed, withdrawable


## Circuit breakers

| Mounting                                                                          |                                                            | Toggle, rotary handle and motor mechanism                                         |                       |
|-----------------------------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------|
|  |                                                            |  |                       |
| Devices                                                                           |                                                            | Fixed device                                                                      | Withdrawable device   |
|                                                                                   |                                                            | <b>NS630b/1600 3/4P</b>                                                           | <b>NS630b/1600 3P</b> |
| Number of devices per cubicle                                                     |                                                            | 1                                                                                 | 1                     |
| No. of vertical modules                                                           |                                                            | <b>37</b>                                                                         | <b>37</b>             |
| Mounting plates                                                                   |                                                            | <b>LVS03487</b>                                                                   | <b>LVS03488</b>       |
| Front plates<br>[No. of vertical modules]                                         | with cut-out                                               | <b>LVS03697</b> [11]                                                              | <b>LVS03699</b> [11]  |
|                                                                                   | upstream (1) with cut-out for 72 x 72 or 96 x 96 mm meters | <b>LVS03723</b> [13]                                                              | <b>LVS03723</b> [13]  |
|                                                                                   | or plain                                                   | <b>LVS03722</b> [13]                                                              | <b>LVS03722</b> [13]  |
|                                                                                   | downstream (1) plain                                       | <b>LVS03722</b> [13]                                                              | <b>LVS03722</b> [13]  |

## Measurement-device installation

Measurement devices are installed on a front plate (**LVS03723**) using plastic mounting plates with cut-outs. The front plate can hold:

- six 72 x 72 mm cases
- or four 96 x 96 mm cases + 2 switches.

| Number and type of devices per row                                       | Metal front plate with cut-out                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | No. of vertical modules | Plastic mounting plates with cut-out                                                | Blanking plate or device support                                                                                                                                                                               |          |
|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| Mounting on an interface with plastic mounting plates                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                         |                                                                                     |                                                                                                                                                                                                                |          |
| 3 x <div>72 x 72</div> Vigirex and other devices 72 x 72 without switch  |                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 13                      |  |  <div>To blank-off or install:<br/>- from 1 to 4 buttons Ø 16 or 22 mm<br/>- 1 device 45 x 45</div>                        |          |
| 2 x <div>96 x 96</div> Power Meter and other devices 96 x 96 with switch |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                         |  |  <div>To blank-off or install:<br/>- from 1 to 4 buttons Ø 16 or 22 mm<br/>- 1 device 45 x 45<br/>- 1 device 72 x 72</div> |          |
|                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                         | LVS03723                                                                            | LVS03902                                                                                                                                                                                                       | LVS03900 |
|                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                         |                                                                                     | LVS03903                                                                                                                                                                                                       | LVS03901 |
| Characteristics                                                          | <div>■ Installation of three devices (72 x 72 mm cases) using plastic mounting plates (<b>LVS03902</b>) and two devices (96 x 96 mm cases) + a switch using plastic mounting plates (<b>LVS03903</b>) on a hinged front plate (<b>LVS03723</b>)</div> <div>■ The plain mounting plates have knock-outs for lamps, pushbuttons, switches or devices.<br/>Knock-outs for LVS03900: 4 Ø 16 mm, 5 Ø 22 mm or one for a 45 x 45 mm device.<br/>Knock-outs for LVS03901: 4 Ø 16 mm, 5 Ø 22 mm or one for a 45 x 45 or 72 x 72 mm device.</div> |                         |                                                                                     |                                                                                                                                                                                                                |          |



(1) Hinged or reversible (left or right-hand opening) front plates connect directly to the framework, without a front-plate support frame.



## ComPacT NS630b to 1600

Dedicated cubicle - W = 400 mm





Fixed, withdrawable

Circuit breakers

| Connection                                                                                          | Upstream on incomer                                                               |                  |                     |
|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------|---------------------|
|                    |  |                  |                     |
| Devices                                                                                             | Fixed device                                                                      |                  | Withdrawable device |
|                                                                                                     | <b>NS630b/1600</b>                                                                |                  |                     |
|                                                                                                     | <b>3P</b>                                                                         | <b>4P</b>        | <b>3P</b>           |
| Type of terminals  | Front connection                                                                  |                  | Front connection    |
| Arc-chute cover    | <b>33596</b>                                                                      | <b>33597</b>     | -                   |
| Vert. conn. adapters                                                                                | <b>33642 (1)</b>                                                                  | <b>33643 (1)</b> | <b>33642 (1)</b>    |
| Cable-lug adapters                                                                                  | <b>33644 (1)</b>                                                                  | <b>33645 (1)</b> | <b>33644 (1)</b>    |
| Spacing rods       | <b>LVS04691</b>                                                                   |                  | <b>LVS04691</b>     |

| Accessories                        |                                                                                    |                                                                                     |                            |
|------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------|
|                                    |  |  |                            |
|                                    | <b>W = 400</b>                                                                     | <b>D = 400</b>                                                                      | <b>D = 600</b>             |
| 4 cable tie supports for framework | <b>LVS08774</b>                                                                    | <b>LVS08794</b>                                                                     | <b>LVS08794 + LVS08796</b> |

(1) Vertical connection adapters and cable-lug adapters are not compatible with input voltage  $\geq 500$  V.

| Distribution                                                                                          | Connection to horizontal busbars                                                    |                     |                                                                                      |                     | Connection to vertical busbars                                                        |                       |
|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------|--------------------------------------------------------------------------------------|---------------------|---------------------------------------------------------------------------------------|-----------------------|
|                                                                                                       | Linergy LGYE                                                                        |                     | Linergy BS                                                                           |                     | Linergy LGY or BS                                                                     |                       |
|                                                                                                       |  |                     |  |                     |  |                       |
| Devices                                                                                               | Fixed                                                                               | Withdrawable        | Fixed                                                                                | Withdrawable        | Fixed                                                                                 | Withdrawable          |
|                                                                                                       | <b>NS630b/1600</b>                                                                  | <b>NS630b/1600</b>  | <b>NS630b/1600</b>                                                                   | <b>NS630b/1600</b>  | <b>NS630b/1600</b>                                                                    | <b>NS630b/1600 3P</b> |
|                                                                                                       | <b>3P/4P</b>                                                                        | <b>3P</b>           | <b>3P/4P</b>                                                                         | <b>3P</b>           | <b>3P/4P</b>                                                                          | <b>3P</b>             |
| Type of terminals  | Front connection                                                                    | Front connection    | Front connection                                                                     | Front connection    | Front connection                                                                      | Front connection      |
| Support            | 2 x <b>LVS04692</b>                                                                 | 2 x <b>LVS04692</b> | 2 x <b>LVS04692</b>                                                                  | 2 x <b>LVS04692</b> | -                                                                                     | -                     |
| Barrier (1)        | <b>LVS04855</b>                                                                     | <b>LVS04855</b>     | <b>LVS04855</b>                                                                      | <b>LVS04855</b>     | <b>LVS04855</b>                                                                       | <b>LVS04855</b>       |
| Horizontal-busbar connections                                                                         | must be made (2)                                                                    |                     | -                                                                                    | -                   | -                                                                                     | -                     |
| 50/60/80                                                                                              | -                                                                                   | -                   | <b>LVS04636 (3)</b>                                                                  | <b>LVS04636</b>     | -                                                                                     | -                     |
| Vertical-busbar connections                                                                           | -                                                                                   | -                   | -                                                                                    | -                   | must be made (2)                                                                      |                       |
| Free support                                                                                          | -                                                                                   | -                   | -                                                                                    | -                   | <b>LVS04662</b>                                                                       |                       |

(1) A barrier must be installed behind front plate **LVS03723** when measurement devices are installed.

(2) Connection to be made according to the busbar drawings supplied by Schneider Electric.

(3) Catalog number **LVS04636** includes 1 connection only. Order 1 connection per phase.

Connection device/horizontal busbar to make by customer.

Busbar selection Linergy BS to make connection: &gt; page G-3 and page G-6.




Busbar selection Linergy LGYE or LGY: &gt; page G-2 and page G-4.

## ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX 100 to 630

Horizontal mounting

Toggle - Fixed

Designed for PowerTag NSX  
Circuit breakers

| Mounting                                                                                         |  | Horizontal fixed                                                                                 |              |                                          |              |                               |              |
|--------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------|--------------|------------------------------------------|--------------|-------------------------------|--------------|
|                 |  |  DD38366 eps    |              |                                          |              |                               |              |
| Devices                                                                                          |  | Toggle                                                                                           |              |                                          |              |                               |              |
|                                                                                                  |  | NSX (1) / NSX Vigi (ELCB) (1) / Vigi NSX 100/160/250                                             |              | NSX (1) / NSX Vigi (ELCB) (1) 400/630    |              | Vigi NSX 400/630              |              |
|                                                                                                  |  | 3P                                                                                               | 4P           | 3P                                       | 4P           | 3P                            | 4P           |
| Number of devices per row                                                                        |  | 1                                                                                                | 1            | 1                                        | 1            | 1                             | 1            |
| PowerTag NSX compatibility                                                                       |  | ~)                                                                                               | ~)           | ~)                                       | ~)           | -                             | -            |
| No. of vertical modules                                                                          |  | 3                                                                                                | 4            | 4                                        | 5            | 4                             | 5            |
| Mounting plates                                                                                  |  | LVS03411                                                                                         | LVS03412     | LVS03451                                 | LVS03452     | LVS03451                      | LVS03452     |
| Front plates with cut-out                                                                        |  | LVS03604 (2)                                                                                     | LVS03606 (2) | LVS03643                                 | LVS03644     | LVS03643                      | LVS03644     |
| Connection                                                                                       |  | Upstream from lateral busbars                                                                    |              |                                          |              |                               |              |
| Fixed devices                                                                                    |  | NSX / NSX Vigi (ELCB) / Vigi NSX 100/160/250                                                     |              | NSX / NSX Vigi (ELCB) / Vigi NSX 400/630 |              |                               |              |
|                                                                                                  |  | 3P                                                                                               | 4P           | 3P                                       | 4P           |                               |              |
| Linergy LGY                                                                                      |  |  DD380513 eps   |              |                                          |              |                               |              |
| Prefabricated connection                                                                         |  | LVS04423 (4)                                                                                     |              | LVS04424 (4)                             |              | LVS04453                      |              |
| Linergy BS, LGYE                                                                                 |  |  DD380693 eps |              |                                          |              |                               |              |
| Connection                                                                                       |  | must be made (3)                                                                                 |              |                                          |              |                               |              |
| Long terminal shields                                                                            |  | LV429517                                                                                         |              | LV429518                                 |              | LV432593                      |              |
|                                                                                                  |  |                                                                                                  |              |                                          |              | LV432594                      |              |
| Connection                                                                                       |  | Downstream distribution                                                                          |              |                                          |              |                               |              |
|  DD380694 eps |  |               |              |                                          |              |                               |              |
| Fixed devices                                                                                    |  | NSX / NSX Vigi (ELCB) 100/250                                                                    |              | Vigi NSX100/250                          |              | NSX / NSX Vigi (ELCB) 400/630 |              |
|                                                                                                  |  | 3P                                                                                               | 4P           | 3P                                       | 4P           | 3P                            | 4P           |
| Front connection                                                                                 |  | LV429517                                                                                         | LV429518     | LV429517                                 | LV429518     | LV432593                      | LV432594     |
| Connection                                                                                       |  | LVS04425                                                                                         | LVS04426     | LVS04429 (5)                             | LVS04430 (5) | LVS04455                      | LVS04456     |
| transfer assembly                                                                                |  | LVS04425                                                                                         | LVS04426     | -                                        | -            | LVS04459 (5)                  | LVS04460 (5) |
| connection with PowerTag NSX                                                                     |  |                                                                                                  |              |                                          |              |                               |              |
| long terminal shields                                                                            |  | -                                                                                                | -            | LV429517                                 | LV429518     | -                             | -            |
| Rear connection                                                                                  |  | LV429515 (4)                                                                                     | LV429516 (4) | LV429515 (4)                             | LV429516 (4) | LV432591 (4)                  | LV432592 (4) |
| short terminal shields                                                                           |  | LV429235                                                                                         |              | LV429235                                 |              | LV432475                      |              |
| short rear connectors                                                                            |  | LV429236                                                                                         |              | LV429236                                 |              | LV432476                      |              |
| long rear connectors                                                                             |  |                                                                                                  |              |                                          |              |                               |              |

(1) Metering and signaling features (ammeter...) can be added. Mounted on a ComPacT NSX, it has the same size than a ComPacT Vigi NSX. Refer to the corresponding column.

(2) Compatible with FDM121.

(3) Connections must be made with insulated flexible bars > page G-22.

(4) Compatible with Linergy LGYE vertical busbar.






(5) Complete the connection with insulated flexible bars (not supplied).

## ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX 100 to 630

Horizontal mounting

Toggle - Plug-in

Circuit breakers

| Mounting                                                                            |                                       | Horizontal plug-in                                                                  |              |                                                  |              |
|-------------------------------------------------------------------------------------|---------------------------------------|-------------------------------------------------------------------------------------|--------------|--------------------------------------------------|--------------|
|    |                                       |    |              |                                                  |              |
| Devices                                                                             |                                       | Toggle                                                                              |              |                                                  |              |
|                                                                                     |                                       | NSX (1) / NSX Vigi (ELCB) (1) / Vigi NSX 100/160/250                                |              | NSX (1) / NSX Vigi (ELCB) (1) / Vigi NSX 400/630 |              |
|                                                                                     |                                       | 3P                                                                                  | 4P           | 3P                                               | 4P           |
| Number of devices per row                                                           |                                       | 1                                                                                   | 1            | 1                                                | 1            |
| No. of vertical modules                                                             |                                       | 3                                                                                   | 4            | 4                                                | 5            |
| Mounting plates                                                                     |                                       | LVS03413 (5)                                                                        | LVS03414 (5) | LVS03453                                         | LVS03454     |
| Front plates with cut-out                                                           |                                       | LVS03604 (2)                                                                        | LVS03606 (2) | LVS03643                                         | LVS03644     |
| Connection                                                                          |                                       | Upstream from lateral busbars                                                       |              |                                                  |              |
| Plug-in devices                                                                     |                                       | NSX / NSX Vigi (ELCB) / Vigi NSX 100/160/250                                        |              | NSX / NSX Vigi (ELCB) / Vigi NSX 400/630         |              |
|                                                                                     |                                       | 3P                                                                                  | 4P           | 3P                                               | 4P           |
| Linery LGY                                                                          |                                       |                                                                                     |              |                                                  |              |
|    |                                       |   |              |                                                  |              |
| Prefabricated connection                                                            |                                       | LVS04431 (3)                                                                        | LVS04432 (3) | LVS04461                                         | LVS04462     |
| Short terminal shields on device                                                    |                                       | LV429515                                                                            | LV429516     | LV432591                                         | LV432592     |
| Linery BS, LGYE                                                                     |                                       |                                                                                     |              |                                                  |              |
|  |                                       |  |              |                                                  |              |
| Connection                                                                          |                                       | must be made with insulated flexible bars > page G-22.                              |              |                                                  |              |
| Connection adapter for plug-in base                                                 |                                       | LV429306                                                                            | LV429307     | LV432584                                         | LV432585     |
| Long terminal shields on plug-in base                                               |                                       | LV429517                                                                            | LV429518     | LV432593                                         | LV432594     |
| Short terminal shields on device                                                    |                                       | LV429515                                                                            | LV429516     | LV432591                                         | LV432592     |
| Connection                                                                          |                                       | Downstream distribution                                                             |              |                                                  |              |
|  |                                       |  |              |                                                  |              |
| Plug-in devices                                                                     |                                       | NSX / NSX Vigi (ELCB) / Vigi NSX 100/160/250                                        |              | NSX / NSX Vigi (ELCB) / Vigi NSX 400/630         |              |
|                                                                                     |                                       | 3P                                                                                  | 4P           | 3P                                               | 4P           |
| Front connection                                                                    | connection adapter for plug-in base   | LV429306                                                                            | LV429307     | LV432584                                         | LV432585     |
|                                                                                     | short terminal shields on device      | LV429515                                                                            | LV429516     | LV432591                                         | LV432592     |
|                                                                                     | long terminal shields on plug-in base | LV429517                                                                            | LV429518     | LV432593                                         | LV432594     |
| Connection transfer assembly                                                        | connection                            | LVS04429 (4)                                                                        | LVS04430 (4) | LVS04459 (4)                                     | LVS04460 (4) |
|                                                                                     | connection adapter for plug-in base   | LV429306                                                                            | LV429307     | LV432584                                         | LV432585     |
|                                                                                     | short terminal shields                | LV429515                                                                            | LV429516     | LV432591                                         | LV432592     |
| Rear connection                                                                     | long terminal shields                 | LV429517                                                                            | LV429518     | LV432593                                         | LV432594     |
|                                                                                     | short terminal shields                | 2 x LV429515                                                                        | 2 x LV429516 | 2 x LV432591                                     | 2 x LV432592 |
|                                                                                     | short rear connectors                 | LV429235                                                                            | LV429235     | LV432475                                         | LV432475     |
|                                                                                     | long rear connectors                  | LV429236                                                                            | LV429236     | LV432476                                         | LV432476     |
| connection adapter for plug-in base                                                 |                                       | LV429306                                                                            | LV429307     | LV432584                                         | LV432585     |

(1) Metering and signaling features (ammeter...) can be added. Mounted on a ComPacT NSX, it has the same size than a ComPacT Vigi NSX. Refer to the corresponding column.

(2) Compatible with FDM121.

(3) Compatible with Linergy LGYE vertical busbar.

(4) Complete the connection with insulated flexible bars (not supplied).

(5) Precut not to be removed for rotary handle & motor mechanism.






## ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX 100 to 630



Horizontal mounting

Rotary handle, motor mechanism - Fixed

Designed for PowerTag NSX  
Circuit breakers

| Mounting                                                                            |  | Horizontal Fixed                                                                    |                 |                         |                 |                                                            |          |                 |          |                     |          |
|-------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|-----------------|-------------------------|-----------------|------------------------------------------------------------|----------|-----------------|----------|---------------------|----------|
|    |  |    |                 |                         |                 |                                                            |          |                 |          |                     |          |
| Devices                                                                             |  | Rotary handle, motor mechanism                                                      |                 |                         |                 |                                                            |          |                 |          |                     |          |
|                                                                                     |  | NSX (1) /<br>NSX Vigi (ELCB) (1)<br>100/160/250                                     |                 | Vigi NSX<br>100/160/250 |                 | NSX (1) / NSX Vigi (ELCB) (1)<br>400/630                   |          |                 |          | Vigi NSX<br>400/630 |          |
|                                                                                     |  | 3P                                                                                  | 4P              | 3P                      | 4P              | rotary handle                                              |          | motor mechanism |          | rotary handle       |          |
|                                                                                     |  |                                                                                     |                 |                         |                 | 3P                                                         | 4P       | 3P              | 4P       | 3P                  | 4P       |
| Number of devices per row                                                           |  | 1                                                                                   | 1               | 1                       | 1               | 1                                                          | 1        | 1               | 1        | 1                   | 1        |
| PowerTag NSX compatibility                                                          |  |                                                                                     |                 |                         |                 |                                                            |          |                 |          | -                   | -        |
| No. of vertical modules                                                             |  | 3                                                                                   | 4               | 3                       | 4               | 4                                                          | 5        | 4               | 5        | 4                   | 5        |
| Mounting plates                                                                     |  | LVS03413<br>(6)                                                                     | LVS03414<br>(6) | LVS03413<br>(6)         | LVS03414<br>(6) | LVS03453                                                   | LVS03454 | LVS03453        | LVS03454 | LVS03453            | LVS03454 |
| Fixing kit for control support                                                      |  | -                                                                                   | -               | -                       | -               | -                                                          | -        | LVS03460        | LVS03460 | -                   | -        |
| Front plates with cut-out                                                           |  | LVS03604<br>(2)                                                                     | LVS03606<br>(2) | LVS03604<br>(2)         | LVS03606<br>(2) | LVS03643                                                   | LVS03644 | LVS03643        | LVS03644 | LVS03643            | LVS03644 |
| Collar                                                                              |  | -                                                                                   | -               | LV429285                | LV429285        | -                                                          | -        | LV429285        | LV429285 | LV429285            | LV429285 |
| Connection                                                                          |  | Upstream from lateral busbars                                                       |                 |                         |                 |                                                            |          |                 |          |                     |          |
| Fixed devices                                                                       |  | NSX / NSX Vigi (ELCB) / Vigi NSX 100/160/250                                        |                 |                         |                 | NSX / NSX Vigi (ELCB) / Vigi NSX 400/630                   |          |                 |          |                     |          |
|                                                                                     |  | 3P                                                                                  |                 | 4P                      |                 | 3P                                                         |          | 4P              |          |                     |          |
| Linery LGY                                                                          |  |  |                 |                         |                 |                                                            |          |                 |          |                     |          |
| Connection                                                                          |  | LVS04427 (3)                                                                        |                 | LVS04428 (3)            |                 | must be made with insulated flexible bars > page G-22 (4). |          |                 |          |                     |          |
| Long terminal shields                                                               |  | -                                                                                   |                 |                         |                 | LV432593                                                   |          | LV432594        |          |                     |          |
| Linery BS, LGYE                                                                     |  |  |                 |                         |                 |                                                            |          |                 |          |                     |          |
| Connection                                                                          |  | must be made with insulated flexible bars > page G-22.                              |                 |                         |                 |                                                            |          |                 |          |                     |          |
| Long terminal shields                                                               |  | LV429517                                                                            |                 | LV429518                |                 | LV432593                                                   |          | LV432594        |          |                     |          |
| Connection                                                                          |  | Downstream distribution                                                             |                 |                         |                 |                                                            |          |                 |          |                     |          |
|  |  |  |                 |                         |                 |                                                            |          |                 |          |                     |          |
| Fixed devices                                                                       |  | NSX / NSX Vigi (ELCB) / Vigi NSX                                                    |                 |                         |                 |                                                            |          |                 |          |                     |          |
|                                                                                     |  | 100/160/250                                                                         |                 |                         |                 | 400/630                                                    |          |                 |          |                     |          |
|                                                                                     |  | 3P                                                                                  |                 | 4P                      |                 | 3P                                                         |          | 4P              |          |                     |          |
| Front connection long terminal shields                                              |  | LV429517                                                                            |                 | LV429518                |                 | LV432593                                                   |          | LV432594        |          |                     |          |
| Connection transfer assembly connection with or without PowerTag NSX                |  | LVS04429 (5)                                                                        |                 | LVS04430 (5)            |                 | LVS04459 (5)                                               |          | LVS04460 (5)    |          |                     |          |
| long terminal shields                                                               |  | LV429517                                                                            |                 | LV429518                |                 | LV432593                                                   |          | LV432594        |          |                     |          |
| Rear connection short terminal shields                                              |  | LV429515                                                                            |                 | LV429516                |                 | LV432591                                                   |          | LV432592        |          |                     |          |
| short rear connectors                                                               |  | LV429235                                                                            |                 |                         |                 | LV432475                                                   |          |                 |          |                     |          |
| long rear connectors                                                                |  | LV429236                                                                            |                 |                         |                 | LV432476                                                   |          |                 |          |                     |          |

(1) Metering and signaling features (ammeter...) can be added. Mounted on a ComPacT NSX, it has the same size than a ComPacT Vigi NSX. Refer to the corresponding column.

(2) Compatible with FDM121.

(3) Compatible with Linergy LGYE vertical busbar.

(4) To be made according to the busbar drawings supplied by Schneider Electric.

(5) Complete the connection with insulated flexible bars (not supplied).



(6) Precut not to be removed for rotary handle & motor mechanism.

## ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX 100 to 630

Horizontal mounting

Rotary handle, motor mechanism - Plug-in

Circuit breakers

| Mounting                                                                                            |                                     | Horizontal plug-in                                                                                        |              |                                                           |              |                                             |              |                                                                    |              |
|-----------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------------------------------------------------------------------------------------------|--------------|-----------------------------------------------------------|--------------|---------------------------------------------|--------------|--------------------------------------------------------------------|--------------|
|                    |                                     | <br>DD383865-plug-in.eps |              |                                                           |              |                                             |              |                                                                    |              |
| Devices                                                                                             |                                     | Rotary handle, motor mechanism                                                                            |              |                                                           |              |                                             |              |                                                                    |              |
|                                                                                                     |                                     | NSX (1) /<br>NSX Vigi (ELCB) (1)<br>100/160/250                                                           |              | Vigi NSX<br>100/160/250                                   |              | NSX (1) /<br>NSX Vigi (ELCB) (1)<br>400/630 |              | Vigi NSX 400/630<br>rotary handle<br>NSX400/630<br>motor mechanism |              |
|                                                                                                     |                                     | 3P                                                                                                        | 4P           | 3P                                                        | 4P           | 3P                                          | 4P           | 3P                                                                 | 4P           |
| Number of devices per row                                                                           |                                     | 1                                                                                                         | 1            | 1                                                         | 1            | 1                                           | 1            | 1                                                                  | 1            |
| No. of vertical modules                                                                             |                                     | 3                                                                                                         | 4            | 3                                                         | 4            | 4                                           | 5            | 4                                                                  | 5            |
| Mounting plates                                                                                     |                                     | LVS03413 (7)                                                                                              | LVS03414 (7) | LVS03413 (7)                                              | LVS03414 (7) | LVS03453 (2)                                | LVS03454 (2) | LVS03453 (2)                                                       | LVS03454 (2) |
| Front plates with cut-out                                                                           |                                     | LVS03604 (3)                                                                                              | LVS03606 (3) | LVS03604 (3)                                              | LVS03606 (3) | LVS03643                                    | LVS03644     | LVS03643                                                           | LVS03644     |
| Collar                                                                                              |                                     | -                                                                                                         | -            | LV429285                                                  | LV429285     | -                                           | -            | LV429285                                                           | LV429285     |
| Connection                                                                                          |                                     | Upstream from lateral busbars                                                                             |              |                                                           |              |                                             |              |                                                                    |              |
| Plug-in devices                                                                                     |                                     | NSX / NSX Vigi (ELCB) / Vigi NSX 100/160/250                                                              |              |                                                           |              | NSX / NSX Vigi (ELCB) / Vigi NSX 400/630    |              |                                                                    |              |
|                                                                                                     |                                     | 3P                                                                                                        |              | 4P                                                        |              | 3P                                          |              | 4P                                                                 |              |
| Linery LGY                                                                                          |                                     | <br>DD383563.eps        |              |                                                           |              |                                             |              |                                                                    |              |
| Connection                                                                                          |                                     | LVS04427 (4)                                                                                              | LVS04428 (4) | must be made with insulated flexible bars > page G-22 (5) |              |                                             |              |                                                                    |              |
| Short terminal shields                                                                              |                                     | LV429515                                                                                                  | LV429516     | LV432591                                                  | LV432592     |                                             |              |                                                                    |              |
| Long terminal shields                                                                               |                                     | -                                                                                                         |              | LV432593                                                  | LV432594     |                                             |              |                                                                    |              |
| Connection adapter for plug-in base                                                                 |                                     | LV429306                                                                                                  | LV429307     | LV432584                                                  | LV432585     |                                             |              |                                                                    |              |
| Linery BS, LGYE                                                                                     |                                     | <br>DD383564.eps       |              |                                                           |              |                                             |              |                                                                    |              |
| Connection                                                                                          |                                     | must be made with insulated flexible bars > page G-22.                                                    |              |                                                           |              |                                             |              |                                                                    |              |
| Short terminal shields                                                                              |                                     | LV429515                                                                                                  | LV429516     | LV432591                                                  | LV432592     |                                             |              |                                                                    |              |
| Long terminal shields                                                                               |                                     | LV429517                                                                                                  | LV429518     | LV432593                                                  | LV432594     |                                             |              |                                                                    |              |
| Connection adapter for plug-in base                                                                 |                                     | LV429306                                                                                                  | LV429307     | LV432584                                                  | LV432585     |                                             |              |                                                                    |              |
| Connection                                                                                          |                                     | Downstream distribution                                                                                   |              |                                                           |              |                                             |              |                                                                    |              |
| <br>DD383566.eps |                                     |                                                                                                           |              |                                                           |              |                                             |              |                                                                    |              |
| Plug-in devices                                                                                     |                                     | NSX / NSX Vigi (ELCB) / Vigi NSX 100/160/250                                                              |              |                                                           |              | NSX / NSX Vigi (ELCB) / Vigi NSX 400/630    |              |                                                                    |              |
|                                                                                                     |                                     | 3P                                                                                                        |              | 4P                                                        |              | 3P                                          |              | 4P                                                                 |              |
| Front connection                                                                                    | long terminal shields               | LV429517                                                                                                  | LV429518     | LV432593                                                  | LV432594     |                                             |              |                                                                    |              |
|                                                                                                     | short terminal shields              | LV429515                                                                                                  | LV429516     | LV432591                                                  | LV432592     |                                             |              |                                                                    |              |
|                                                                                                     | connection adapter for plug-in base | LV429306                                                                                                  | LV429307     | LV432584                                                  | LV432585     |                                             |              |                                                                    |              |
| Connection transfer assembly                                                                        | connection                          | LVS04429 (6)                                                                                              | LVS04430 (6) | LVS04459 (6)                                              | LVS04460 (6) |                                             |              |                                                                    |              |
|                                                                                                     | long terminal shields               | LV429517                                                                                                  | LV429518     | LV432593                                                  | LV432594     |                                             |              |                                                                    |              |
|                                                                                                     | short terminal shields              | LV429515                                                                                                  | LV429516     | LV432591                                                  | LV432592     |                                             |              |                                                                    |              |
| Rear connection                                                                                     | short terminal shields              | 2 x LV429515                                                                                              | 2 x LV429516 | 2 x LV432591                                              | 2 x LV432592 |                                             |              |                                                                    |              |
|                                                                                                     | short rear connectors               | LV429235                                                                                                  |              | LV432475                                                  |              |                                             |              |                                                                    |              |
|                                                                                                     | long rear connectors                | LV429236                                                                                                  |              | LV432476                                                  |              |                                             |              |                                                                    |              |
|                                                                                                     | connection adapter for plug-in base | LV429306                                                                                                  | LV429307     | LV432584                                                  | LV432585     |                                             |              |                                                                    |              |

(1) Metering and signaling features (ammeter...) can be added. Mounted on a ComPacT NSX, it has the same size than a ComPacT Vigi NSX. Refer to the corresponding column.

(2) Catalog number LVS03460 is recommended when installing an NSX with a motor mechanism.

(3) Compatible with FDM121.

(4) Compatible with Linery LGYE vertical busbar.

(5) To be made according to the busbar drawings supplied by Schneider Electric.

(6) Complete the connection with insulated flexible bars (not supplied).




(7) Precut not to be removed for rotary handle & motor mechanism.

## ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX 100 to 630

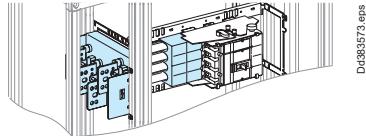Horizontal mounting

All controls - Withdrawable

Circuit breakers

| Mounting                                                                            |                                     | Horizontal withdrawable                                                             |                         |                                                            |                        |
|-------------------------------------------------------------------------------------|-------------------------------------|-------------------------------------------------------------------------------------|-------------------------|------------------------------------------------------------|------------------------|
|    |                                     |    |                         |                                                            |                        |
| Devices                                                                             |                                     | All controls<br>NSX / NSX Vigi (ELCB)<br>100/160/250 (1)                            | Vigi NSX<br>100/160/250 | NSX / NSX Vigi (ELCB)<br>400/630 (1)                       | Vigi NSX<br>400/630    |
| Number of devices per row                                                           |                                     | 1                                                                                   | 1                       | 1                                                          | 1                      |
| No. of vertical modules (1)                                                         |                                     | 5                                                                                   | 5                       | 6                                                          | 6                      |
| Mounting plates                                                                     |                                     | LVS03415                                                                            | LVS03415                | LVS03462 (2)                                               | LVS03462 (2)           |
| Front plates                                                                        |                                     | LVS03618                                                                            | LVS03618                | LVS03657                                                   | LVS03657               |
| Collar                                                                              |                                     | LV429284                                                                            | LV429285                | LV432534                                                   | LV429285               |
| Locking kit (3)                                                                     |                                     | LV429286                                                                            | LV429286                | LV429286 (4)                                               | LV429286 (4)           |
| Connection                                                                          |                                     | Upstream from lateral busbars                                                       |                         |                                                            |                        |
| Withdrawable devices                                                                |                                     | NSX / NSX Vigi (ELCB) / Vigi NSX 100/160/250<br>3P                                  | Vigi NSX 400/630<br>4P  | NSX / NSX Vigi (ELCB) / Vigi NSX 400/630<br>3P             | Vigi NSX 400/630<br>4P |
| Linerage LGY                                                                        |                                     |    |                         |                                                            |                        |
| Prefabricated connection for toggle                                                 |                                     | LVS04431                                                                            | LVS04432                | LVS04461                                                   | LVS04462               |
| Prefabricated connection for rotary handle & motor mechanism                        |                                     | LVS04427 (5)                                                                        | LVS04428 (5)            | must be made with insulated flexible bars > page G-22 (6). |                        |
| Connection adapter for plug-in base                                                 |                                     | -                                                                                   | -                       | LV432584 (7)                                               | LV432585 (7)           |
| Short terminal shields                                                              |                                     | LV429515                                                                            | LV429516                | LV432591                                                   | LV432592               |
| Long terminal shields                                                               |                                     | -                                                                                   | -                       | LV432593 (7)                                               | LV432594 (7)           |
| Linerage BS, LGYE                                                                   |                                     |  |                         |                                                            |                        |
| Connection                                                                          |                                     | must be made with insulated flexible bars > page G-22.                              |                         |                                                            |                        |
| Connection adapter for plug-in base                                                 |                                     | LV429306                                                                            | LV429307                | LV432584 (7)                                               | LV432585 (7)           |
| Short terminal shields                                                              |                                     | LV429515                                                                            | LV429516                | LV432591                                                   | LV432592               |
| Long terminal shields                                                               |                                     | LV429517                                                                            | LV429518                | LV432593 (7)                                               | LV432594 (7)           |
| Connection                                                                          |                                     | Downstream distribution                                                             |                         |                                                            |                        |
|  |                                     |  |                         |                                                            |                        |
| Withdrawable devices                                                                |                                     | NSX / NSX Vigi (ELCB) / Vigi NSX 100/160/250<br>3P                                  | Vigi NSX 400/630<br>4P  | NSX / NSX Vigi (ELCB) / Vigi NSX 400/630<br>3P             | Vigi NSX 400/630<br>4P |
| Front connection                                                                    | connection adapter for plug-in base | LV429306                                                                            | LV429307                | LV432584                                                   | LV432585               |
|                                                                                     | long terminal shields               | LV429517                                                                            | LV429518                | LV432593                                                   | LV432594               |
|                                                                                     | short terminal shields              | LV429515                                                                            | LV429516                | LV432591                                                   | LV432592               |
| Connection transfer assembly                                                        | connection                          | LVS04429 (8)                                                                        | LVS04430 (8)            | LVS04459 (8)                                               | LVS04460 (8)           |
|                                                                                     | connection adapter for plug-in base | LV429306                                                                            | LV429307                | LV432584                                                   | LV432585               |
|                                                                                     | long terminal shields               | LV429517                                                                            | LV429518                | LV432593                                                   | LV432594               |
| Rear connection                                                                     | short terminal shields              | LV429515                                                                            | LV429516                | LV432591                                                   | LV432592               |
|                                                                                     | 2 x LV429515                        | 2 x LV429515                                                                        | 2 x LV429516            | 2 x LV432591                                               | 2 x LV432592           |
|                                                                                     | short rear connectors               | LV429235                                                                            | LV429235                | LV432475                                                   | LV432475               |
|                                                                                     | long rear connectors                | LV429236                                                                            | LV429236                | LV432476                                                   | LV432476               |
| connection adapter for plug-in base                                                 |                                     | LV429306                                                                            | LV429307                | LV432584                                                   | LV432585               |

(1) Metering and signaling features (ammeter...) can be added. Mounted on a ComPacT NSX, it has the same size than a ComPacT Vigi NSX. Refer to the corresponding column.

(1) Catalog number LVS03460 is recommended when installing an NSX with a motor mechanism.

(3) If mounting several above one another chassis + form 3b + chassis locking kit LV429286, the number of vertical modules must be increased by 2 ; it is necessary to add a 2 modules front plate LVS03802.

(4) Not compatible with NSX630.

(5) Compatible with Linerage LGYE vertical busbar.

(6) To be made according to the busbar drawings supplied by Schneider Electric.

(7) Only for Rotary handle and motor mechanism.



(8) Complete the connection with insulated flexible bars (not supplied).

## ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX 400/630


Vertical mounting

Toggle - Fixed

Designed for PowerTag NSX  
Circuit breakers

| Mounting                                                                          |                              | Vertical fixed                                                                                            |              |                  |                 |                               |              |                  |                 |
|-----------------------------------------------------------------------------------|------------------------------|-----------------------------------------------------------------------------------------------------------|--------------|------------------|-----------------|-------------------------------|--------------|------------------|-----------------|
|  |                              |  <div>D0303554.eps</div> |              |                  |                 |                               |              |                  |                 |
| Devices                                                                           |                              | Toggle                                                                                                    |              |                  |                 |                               |              |                  |                 |
|                                                                                   |                              | NSX / NSX Vigi (ELCB) 400 (1)                                                                             |              | Vigi NSX 400     |                 | NSX / NSX Vigi (ELCB) 630 (1) |              | Vigi NSX 630     |                 |
| Number of devices per row                                                         |                              | 1                                                                                                         | 2            | 1                | 2               | 1                             | 2            | 1                | 2               |
| PowerTag NSX compatibility                                                        |                              | ⌚                                                                                                         |              | ⌚                |                 | ⌚                             |              | ⌚                |                 |
| No. of vertical modules                                                           |                              | 11 or 13                                                                                                  |              | 13 or 15         |                 | 13 or 15                      |              | 15 or 17         |                 |
| Mounting plates                                                                   |                              | LVS03461                                                                                                  |              | LVS03461         |                 | LVS03461                      |              | LVS03461         |                 |
| Front plates<br>[No. of<br>vertical<br>modules]                                   | upstream                     | LVS03801<br>[1]                                                                                           | LVS03802 [2] | -                | LVS03802<br>[2] | LVS03802<br>[2]               | LVS03803 [3] | LVS03801<br>[1]  | LVS03803<br>[3] |
|                                                                                   | with cut-out                 | LVS03275<br>[9]                                                                                           | LVS03663 [7] | LVS03297<br>[11] | LVS03666<br>[9] | LVS03275<br>[9]               | LVS03663 [7] | LVS03297<br>[11] | LVS03666<br>[9] |
|                                                                                   | downstream                   | LVS03801<br>[1]                                                                                           | LVS03802 [2] | LVS03802<br>[2]  | LVS03802<br>[2] | LVS03802<br>[2]               | LVS03803 [3] | LVS03803<br>[3]  | LVS03803<br>[3] |
|                                                                                   | downstream with PowerTag NSX | LVS03803<br>[3]                                                                                           | LVS03804 [4] | LVS03804<br>[4]  | LVS03804<br>[4] | LVS03804<br>[4]               | LVS03805 [5] | LVS03805<br>[5]  | LVS03805<br>[5] |

| Connection                                                                          |                        | Upstream from lateral busbars - Linergy LGY, BS, LGYE      |          |                                      |          |
|-------------------------------------------------------------------------------------|------------------------|------------------------------------------------------------|----------|--------------------------------------|----------|
|  |                        |                                                            |          |                                      |          |
| Fixed devices                                                                       |                        | NSX / NSX Vigi (ELCB) / Vigi NSX 400                       |          | NSX / NSX Vigi (ELCB) / Vigi NSX 630 |          |
|                                                                                     |                        | 3P                                                         | 4P       | 3P                                   | 4P       |
| Front connection                                                                    | connection             | must be made with insulated flexible bars > page G-22. (2) |          |                                      |          |
|                                                                                     | long terminal shields  | LV432593                                                   | LV432594 | LV432593                             | LV432594 |
| Rear connection                                                                     | short terminal shields | LV432591                                                   | LV432592 | LV432591                             | LV432592 |
|                                                                                     | short rear connectors  | LV432475                                                   |          | LV432475                             |          |
|                                                                                     | long rear connectors   | LV432476                                                   |          | LV432476                             |          |

| Connection                                                                          |                        | Downstream distribution                                                                                     |          |                                      |          |
|-------------------------------------------------------------------------------------|------------------------|-------------------------------------------------------------------------------------------------------------|----------|--------------------------------------|----------|
|  |                        |  <div>D0303554.eps</div> |          |                                      |          |
| Fixed devices                                                                       |                        | NSX / NSX Vigi (ELCB) / Vigi NSX 400                                                                        |          | NSX / NSX Vigi (ELCB) / Vigi NSX 630 |          |
|                                                                                     |                        | 3P                                                                                                          | 4P       | 3P                                   | 4P       |
| Front connection                                                                    | long terminal shields  | LV432593                                                                                                    | LV432594 | LV432593                             | LV432594 |
|                                                                                     | short terminal shields | LV432591                                                                                                    | LV432592 | LV432591                             | LV432592 |
| Rear connection (3)                                                                 | short rear connectors  | LV432475                                                                                                    |          | LV432475                             |          |
|                                                                                     | long rear connectors   | LV432476                                                                                                    |          | LV432476                             |          |

(1) Metering and signaling features (ammeter...) can be added. Mounted on a ComPacT NSX, it has the same size than a ComPacT Vigi NSX. Refer to the corresponding column.

(2) Connection to be made according to the busbar drawings supplied by Schneider Electric.



(3) Size reduced to one module downstream.

## ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX 400/630

Vertical mounting

Toggle - Plug-in

Circuit breakers

| Mounting                                                                          |              | Vertical plug-in                                                                                           |              |               |              |                               |              |               |              |
|-----------------------------------------------------------------------------------|--------------|------------------------------------------------------------------------------------------------------------|--------------|---------------|--------------|-------------------------------|--------------|---------------|--------------|
|  |              |  <div>Doc 83554 eps</div> |              |               |              |                               |              |               |              |
| Devices                                                                           |              | Toggle                                                                                                     |              |               |              |                               |              |               |              |
|                                                                                   |              | NSX / NSX Vigi (ELCB) 400 (1)                                                                              |              | Vigi NSX 400  |              | NSX / NSX Vigi (ELCB) 630 (1) |              | Vigi NSX 630  |              |
| Number of devices per row                                                         |              | 1                                                                                                          | 2            | 1             | 2            | 1                             | 2            | 1             | 2            |
| Mounting plates                                                                   |              | LVS03461                                                                                                   |              | LVS03461      |              | LVS03461                      |              | LVS03461      |              |
| Front plates<br>[No. of<br>vertical<br>modules]                                   | upstream     | LVS03801 [1]                                                                                               | LVS03802 [2] | -             | LVS03802 [2] | LVS03802 [2]                  | LVS03803 [3] | LVS03801 [1]  | LVS03803 [3] |
|                                                                                   | with cut-out | LVS03275 [9]                                                                                               | LVS03663 [7] | LVS03297 [11] | LVS03666 [9] | LVS03275 [9]                  | LVS03663 [7] | LVS03297 [11] | LVS03666 [9] |
|                                                                                   | downstream   | LVS03801 [1]                                                                                               | LVS03802 [2] | LVS03802 [2]  | LVS03802 [2] | LVS03802 [2]                  | LVS03803 [3] | LVS03803 [3]  | LVS03803 [3] |

| Connection                                                                        |                                     | Upstream from lateral busbars - Linergy LGY, BS, LGYE     |              |                                      |              |
|-----------------------------------------------------------------------------------|-------------------------------------|-----------------------------------------------------------|--------------|--------------------------------------|--------------|
|  |                                     |                                                           |              |                                      |              |
| Plug-in devices                                                                   |                                     | NSX / NSX Vigi (ELCB) / Vigi NSX 400                      |              | NSX / NSX Vigi (ELCB) / Vigi NSX 630 |              |
|                                                                                   |                                     | 3P                                                        | 4P           | 3P                                   | 4P           |
| Front connection                                                                  | connection                          | must be made with insulated flexible bars > page G-22.(2) |              |                                      |              |
|                                                                                   | long terminal shields               | LV432593                                                  | LV432594     | LV432593                             | LV432594     |
|                                                                                   | short terminal shields              | LV432591                                                  | LV432592     | LV432591                             | LV432592     |
|                                                                                   | connection adapter for plug-in base | LV432584                                                  | LV432585     | LV432584                             | LV432585     |
| Rear connection                                                                   | short terminal shields              | 2 x LV432591                                              | 2 x LV432592 | 2 x LV432591                         | 2 x LV432592 |
|                                                                                   | short rear connectors               | LV432475                                                  |              | LV432475                             |              |
|                                                                                   | long rear connectors                | LV432476                                                  |              | LV432476                             |              |
|                                                                                   | connection adapter for plug-in base | LV432584                                                  | LV432585     | LV432584                             | LV432585     |

| Connection                                                                          |                                       | Downstream distribution              |              |                                      |              |
|-------------------------------------------------------------------------------------|---------------------------------------|--------------------------------------|--------------|--------------------------------------|--------------|
|  |                                       |                                      |              |                                      |              |
|                                                                                     |                                       |                                      |              |                                      |              |
| Plug-in devices                                                                     |                                       | NSX / NSX Vigi (ELCB) / Vigi NSX 400 |              | NSX / NSX Vigi (ELCB) / Vigi NSX 630 |              |
|                                                                                     |                                       | 3P                                   | 4P           | 3P                                   | 4P           |
| Front connection                                                                    | connection adapter for plug-in base   | LV432584                             | LV432585     | LV432584                             | LV432585     |
|                                                                                     | short terminal shields on device      | LV432591                             | LV432592     | LV432591                             | LV432592     |
|                                                                                     | long terminal shields on plug-in base | LV432593                             | LV432594     | LV432593                             | LV432594     |
| Rear connection (3)                                                                 | short terminal shields                | 2 x LV432591                         | 2 x LV432592 | 2 x LV432591                         | 2 x LV432592 |
|                                                                                     | short rear connectors                 | LV432475                             |              | LV432475                             |              |
|                                                                                     | long rear connectors                  | LV432476                             |              | LV432476                             |              |
|                                                                                     | connection adapter for plug-in base   | LV432584                             | LV432585     | LV432584                             | LV432585     |

(1) Metering and signaling features (ammeter...) can be added. Mounted on a ComPacT NSX, it has the same size than a ComPacT Vigi NSX. Refer to the corresponding column.

(2) Connection to be made according to the busbar drawings supplied by Schneider Electric.

(3) Size reduced to one module downstream.





## ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX 400/630



Vertical mounting

Rotary handle, motor mechanism - Fixed

Designed for PowerTag NSX  
Circuit breakers

| Mounting                                                                            |                              | Vertical fixed                                                                    |              |                            |              |                               |              |                            |              |
|-------------------------------------------------------------------------------------|------------------------------|-----------------------------------------------------------------------------------|--------------|----------------------------|--------------|-------------------------------|--------------|----------------------------|--------------|
|    |                              |  |              |                            |              |                               |              |                            |              |
| Devices                                                                             |                              | Rotary handle, motor mechanism                                                    |              |                            |              |                               |              |                            |              |
|                                                                                     |                              | NSX / NSX Vigi (ELCB) 400 (1)                                                     |              | Vigi NSX 400 Rotary handle |              | NSX / NSX Vigi (ELCB) 630 (1) |              | Vigi NSX 630 Rotary handle |              |
| Number of devices per row                                                           |                              | 1                                                                                 | 2            | 1                          | 2            | 1                             | 2            | 1                          | 2            |
| PowerTag NSX compatibility                                                          |                              | ⌚                                                                                 |              | ⌚                          |              | ⌚                             |              | ⌚                          |              |
| No. of vertical modules                                                             |                              | 11 or 13                                                                          |              | 13 or 15                   |              | 13 or 15                      |              | 15 or 17                   |              |
| Mounting plates                                                                     |                              | LVS03461 (2)                                                                      |              | LVS03461                   |              | LVS03461 (2)                  |              | LVS03461                   |              |
| Front plates<br>[No. of vertical modules]                                           | upstream                     | LVS03801 [1]                                                                      | LVS03802 [2] | -                          | LVS03802 [2] | LVS03802 [2]                  | LVS03803 [3] | LVS03801 [1]               | LVS03803 [3] |
|                                                                                     | with cut-out                 | LVS03275 [9]                                                                      | LVS03663 [7] | LVS03297 [11]              | LVS03666 [9] | LVS03275 [9]                  | LVS03663 [7] | LVS03297 [11]              | LVS03666 [9] |
|                                                                                     | downstream                   | LVS03801 [1]                                                                      | LVS03802 [2] | LVS03802 [2]               | LVS03802 [2] | LVS03802 [2]                  | LVS03803 [3] | LVS03803 [3]               | LVS03803 [3] |
|                                                                                     | downstream with PowerTag NSX | LVS03803 [3]                                                                      | LVS03804 [4] | LVS03804 [4]               | LVS03804 [4] | LVS03804 [4]                  | LVS03805 [5] | LVS03805 [5]               | LVS03805 [5] |
| Collar                                                                              |                              | -                                                                                 |              | LV429285                   |              | -                             |              | LV429285                   |              |
| IP40 escutcheons                                                                    |                              | -                                                                                 |              | LV429316 (3)               |              | -                             |              | LV429316 (3)               |              |
| Connection                                                                          |                              | Upstream from lateral busbars - Linergy LGY, BS, LGYE                             |              |                            |              |                               |              |                            |              |
|  |                              |                                                                                   |              |                            |              |                               |              |                            |              |
| Fixed devices                                                                       |                              | NSX / NSX Vigi (ELCB) / Vigi NSX 400/630                                          |              |                            |              |                               |              |                            |              |
|                                                                                     |                              | 3P                                                                                |              | 4P                         |              |                               |              |                            |              |
| Front connection                                                                    | connection                   | must be made with insulated flexible bars > page G-22 (4)                         |              |                            |              |                               |              |                            |              |
|                                                                                     | long terminal shields        | LV432593                                                                          |              | LV432594                   |              |                               |              |                            |              |
| Rear connection                                                                     | short terminal shields       | LV432591 (5)                                                                      |              | LV432592 (5)               |              |                               |              |                            |              |
|                                                                                     | short rear connectors        | LV432475                                                                          |              |                            |              |                               |              |                            |              |
|                                                                                     | long rear connectors         | LV432476                                                                          |              |                            |              |                               |              |                            |              |
| Connection                                                                          |                              | Downstream distribution                                                           |              |                            |              |                               |              |                            |              |
|  |                              |                                                                                   |              |                            |              |                               |              |                            |              |
| Fixed devices                                                                       |                              | NSX / NSX Vigi (ELCB) / Vigi NSX 400/630                                          |              |                            |              |                               |              |                            |              |
|                                                                                     |                              | 3P                                                                                |              | 4P                         |              |                               |              |                            |              |
| Front connection                                                                    | long terminal shields        | LV432593                                                                          |              | LV432594                   |              |                               |              |                            |              |
|                                                                                     | short terminal shields       | LV432591                                                                          |              | LV432592                   |              |                               |              |                            |              |
| Rear connection (4)                                                                 | short rear connectors        | LV432475                                                                          |              |                            |              |                               |              |                            |              |
|                                                                                     | long rear connectors         | LV432476                                                                          |              |                            |              |                               |              |                            |              |

(1) Metering and signaling features (ammeter...) can be added. Mounted on a ComPacT NSX, it has the same size than a ComPacT Vigi NSX. Refer to the corresponding column.

(2) Catalog number LVS03460 is recommended when installing an NSX with a motor mechanism.

(3) For ammeter, take LV429285 + LV429318 catalog numbers.

(4) Connection to be made according to the busbar drawings supplied by Schneider Electric.



(5) Size reduced to one module downstream.

## ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX 400/630

Vertical mounting

Rotary handle, motor mechanism - Plug-in

Circuit breakers

| Mounting                                                                            |                                     |  | Vertical plug-in                                                                  |              |                           |              |                               |              |                           |              |
|-------------------------------------------------------------------------------------|-------------------------------------|--|-----------------------------------------------------------------------------------|--------------|---------------------------|--------------|-------------------------------|--------------|---------------------------|--------------|
|    |                                     |  |  |              |                           |              |                               |              |                           |              |
| Devices                                                                             |                                     |  | Rotary handle, motor mechanism                                                    |              |                           |              |                               |              |                           |              |
|                                                                                     |                                     |  | NSX / NSX Vigi (ELCB) 400 (1)                                                     |              | Vigi NSX400 Rotary handle |              | NSX / NSX Vigi (ELCB) 630 (1) |              | Vigi NSX630 Rotary handle |              |
| Number of devices per row                                                           |                                     |  | 1                                                                                 | 2            | 1                         | 2            | 1                             | 2            | 1                         | 2            |
| No. of vertical modules                                                             |                                     |  | 11                                                                                |              | 13                        |              | 13                            |              | 15                        |              |
| Mounting plates                                                                     |                                     |  | LVS03461 (2)                                                                      |              | LVS03461                  |              | LVS03461 (2)                  |              | LVS03461                  |              |
| Front plates<br>[No. of vertical modules]                                           | upstream                            |  | LVS03801 [1]                                                                      | LVS03802 [2] | -                         | LVS03802 [2] | LVS03802 [2]                  | LVS03803 [3] | LVS03801 [1]              | LVS03803 [3] |
|                                                                                     | with cut-out                        |  | LVS03275 [9]                                                                      | LVS03663 [7] | LVS03297 [11]             | LVS03666 [9] | LVS03275 [9]                  | LVS03663 [7] | LVS03297 [11]             | LVS03666 [9] |
|                                                                                     | downstream                          |  | LVS03801 [1]                                                                      | LVS03802 [2] | LVS03802 [2]              | LVS03802 [2] | LVS03802 [2]                  | LVS03803 [3] | LVS03803 [3]              | LVS03803 [3] |
| Collar                                                                              |                                     |  | -                                                                                 |              | LV429285                  |              | -                             |              | LV429285                  |              |
| IP40 front-panel escutcheons                                                        |                                     |  | -                                                                                 |              | LV429316 (3)              |              | -                             |              | LV429316 (3)              |              |
| Connection                                                                          |                                     |  | Upstream from lateral busbars - Linergy LGY, BS, LGYE                             |              |                           |              |                               |              |                           |              |
|  |                                     |  |                                                                                   |              |                           |              |                               |              |                           |              |
| Plug-in devices                                                                     |                                     |  | NSX / NSX Vigi (ELCB) / Vigi NSX 400/630                                          |              |                           |              |                               |              |                           |              |
|                                                                                     |                                     |  | 3P                                                                                |              | 4P                        |              |                               |              |                           |              |
| Front connection                                                                    | connection                          |  | must be made with insulated flexible bars > page G-22 (4)                         |              |                           |              |                               |              |                           |              |
|                                                                                     | long terminal shields               |  | LV432593                                                                          |              | LV432594                  |              |                               |              |                           |              |
|                                                                                     | short terminal shields              |  | LV432591                                                                          |              | LV432592                  |              |                               |              |                           |              |
|                                                                                     | connection adapter for plug-in base |  | LV432584                                                                          |              | LV432585                  |              |                               |              |                           |              |
| Rear connection                                                                     | short terminal shields              |  | 2 x LV432591 (5)                                                                  |              | 2 x LV432592 (5)          |              |                               |              |                           |              |
|                                                                                     | short rear connectors               |  | LV432475                                                                          |              |                           |              |                               |              |                           |              |
|                                                                                     | long rear connectors                |  | LV432476                                                                          |              |                           |              |                               |              |                           |              |
|                                                                                     | connection adapter for plug-in base |  | LV432584                                                                          |              | LV432585                  |              |                               |              |                           |              |
| Connection                                                                          |                                     |  | Downstream distribution                                                           |              |                           |              |                               |              |                           |              |
|  |                                     |  |                                                                                   |              |                           |              |                               |              |                           |              |
| Plug-in devices                                                                     |                                     |  | NSX / NSX Vigi (ELCB) / Vigi NSX 400/630                                          |              |                           |              |                               |              |                           |              |
|                                                                                     |                                     |  | 3P                                                                                |              | 4P                        |              |                               |              |                           |              |
| Front connection                                                                    | long terminal shields               |  | LV432593                                                                          |              | LV432594                  |              |                               |              |                           |              |
|                                                                                     | short terminal shields              |  | LV432591                                                                          |              | LV432592                  |              |                               |              |                           |              |
|                                                                                     | connection adapter for plug-in base |  | LV432584                                                                          |              | LV432585                  |              |                               |              |                           |              |
| Rear connection (5)                                                                 | short terminal shields              |  | 2 x LV432591                                                                      |              | 2 x LV432592              |              |                               |              |                           |              |
|                                                                                     | short rear connectors               |  | LV432475                                                                          |              |                           |              |                               |              |                           |              |
|                                                                                     | long rear connectors                |  | LV432476                                                                          |              |                           |              |                               |              |                           |              |
|                                                                                     | connection adapter for plug-in base |  | LV432584                                                                          |              | LV432585                  |              |                               |              |                           |              |

(1) Metering and signaling features (ammeter...) can be added. Mounted on a ComPacT NSX, it has the same size than a ComPacT Vigi NSX. Refer to the corresponding column.

(2) Catalog number LVS03460 is recommended when installing an NSX with a motor mechanism.

(3) For ammeter, take LV429285 + LV429318 catalog numbers.

(4) Connection to be made according to the busbar drawings supplied by Schneider Electric.



(5) Size reduced to one module downstream.


## ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX 100 to 630

Vertical mounting


All controls - Withdrawable

Circuit breakers

| Mounting                                                                          | Vertical withdrawable                                                                                     |                         |                         |                         |                                   |                         |                         |                                   |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|-------------------------|-------------------------|-------------------------|-----------------------------------|-------------------------|-------------------------|-----------------------------------|
|  |  <div>Do380574.eps</div> |                         |                         |                         |                                   |                         |                         |                                   |
| Devices                                                                           | All controls                                                                                              |                         |                         |                         |                                   |                         |                         |                                   |
|                                                                                   | NSX / NSX Vigi (ELCB) <sup>(1)</sup>                                                                      |                         |                         |                         |                                   |                         |                         |                                   |
|                                                                                   | 100/160                                                                                                   | 250                     | 400                     | 400 toggle              | 400 rotary handle + motor mechan. | 630                     | 630 toggle              | 630 rotary handle + motor mechan. |
| Number of devices per row                                                         | 2                                                                                                         | 2                       | 2                       | 1                       | 1                                 | 2                       | 1                       | 1                                 |
| No. of vertical modules                                                           | 8                                                                                                         | 9                       | 11                      | 11                      | 11                                | 13                      | 13                      | 13                                |
| Mounting plates                                                                   | LVS03421                                                                                                  | LVS03421                | LVS03461 <sup>(2)</sup> | LVS03461                | LVS03461 <sup>(2)</sup>           | LVS03461 <sup>(2)</sup> | LVS03461                | LVS03461 <sup>(2)</sup>           |
| Front plates <div>[No. of vertical modules]</div>                                 | upstream                                                                                                  | LVS03802 <sup>[2]</sup> | LVS03802 <sup>[2]</sup> | LVS03802 <sup>[2]</sup> | LVS03801 <sup>[1]</sup>           | LVS03801 <sup>[1]</sup> | LVS03803 <sup>[3]</sup> | LVS03802 <sup>[2]</sup>           |
|                                                                                   | with cut-out                                                                                              | LVS03243 <sup>[5]</sup> | LVS03243 <sup>[5]</sup> | LVS03663 <sup>[7]</sup> | LVS03275 <sup>[9]</sup>           | LVS03275 <sup>[9]</sup> | LVS03663 <sup>[7]</sup> | LVS03275 <sup>[9]</sup>           |
|                                                                                   | downstream                                                                                                | LVS03801 <sup>[1]</sup> | LVS03802 <sup>[2]</sup> | LVS03802 <sup>[2]</sup> | LVS03801 <sup>[1]</sup>           | LVS03801 <sup>[1]</sup> | LVS03803 <sup>[3]</sup> | LVS03802 <sup>[2]</sup>           |
| Collar                                                                            | LV429284 <sup>(3)</sup>                                                                                   | LV429284 <sup>(3)</sup> | LV432534 <sup>(3)</sup> | LV432534                | -                                 | LV432534 <sup>(3)</sup> | LV432534                | -                                 |

| Mounting                                                                          |              | Vertical withdrawable   |                         |                         |              |                                              |              |                     |              |                                              |              |
|-----------------------------------------------------------------------------------|--------------|-------------------------|-------------------------|-------------------------|--------------|----------------------------------------------|--------------|---------------------|--------------|----------------------------------------------|--------------|
|  |              |                         |                         |                         |              |                                              |              |                     |              |                                              |              |
| Devices                                                                           |              | All controls            |                         |                         |              |                                              |              |                     |              |                                              |              |
|                                                                                   |              | Vigi NSX 100/160        | Vigi NSX 250            | Vigi NSX 400 toggle     |              | Vigi NSX 400 rotary handle + motor mechanism |              | Vigi NSX 630 toggle |              | Vigi NSX 630 rotary handle + motor mechanism |              |
| Number of devices per row                                                         |              | 2                       | 2                       | 1                       | 2            | 1                                            | 2            | 1                   | 2            | 1                                            | 2            |
| No. of vertical modules                                                           |              | 10                      | 11                      | 13                      |              | 13                                           |              | 15                  |              | 15                                           |              |
| Mounting plates                                                                   |              | LVS03421                | LVS03421                | LVS03461                | LVS03461     | LVS03461                                     | LVS03461     | LVS03461            | LVS03461     | LVS03461                                     | LVS03461     |
| Front plates<br>[No. of vertical modules]                                         | upstream     | LVS03802 [2]            | LVS03802 [2]            | -                       | LVS03802 [2] | -                                            | LVS03802 [2] | LVS03801 [1]        | LVS03803 [3] | LVS03801 [1]                                 | LVS03803 [3] |
|                                                                                   | with cut-out | LVS03244 [7]            | LVS03244 [7]            | LVS03297 [11]           | LVS03666 [9] | LVS03297 [11]                                | LVS03666 [9] | LVS03297 [11]       | LVS03666 [9] | LVS03297 [11]                                | LVS03666 [9] |
|                                                                                   | downstream   | LVS03801 [1]            | LVS03802 [2]            | LVS03802 [2]            | LVS03802 [2] | LVS03802 [2]                                 | LVS03802 [2] | LVS03803 [3]        | LVS03803 [3] | LVS03803 [3]                                 | LVS03803 [3] |
| Collar                                                                            |              | LV429285 + LV429284 (3) | LV429285 + LV429284 (3) | LV429285 + LV432534 (3) |              | LV429285                                     |              | LV429285 + LV432534 |              | LV429285                                     |              |

| Connection                          | Upstream from lateral busbars - Linergy LGY, BS, LGYE  |              |                                                 |              |
|-------------------------------------|--------------------------------------------------------|--------------|-------------------------------------------------|--------------|
| <b>Withdrawable devices</b>         | <b>NSX / NSX Vigi (ELCB) / Vigi NSX 100/160/250</b>    |              | <b>NSX / NSX Vigi (ELCB) / Vigi NSX 400/630</b> |              |
|                                     | <b>3P</b>                                              | <b>4P</b>    | <b>3P</b>                                       | <b>4P</b>    |
| Front conn.                         | must be made with insulated flexible bars > page G-22. |              |                                                 |              |
| long terminal shields               | LV429517                                               | LV429518     | LV432593                                        | LV432594     |
| short terminal shields              | LV429515                                               | LV429516     | LV432591                                        | LV432592     |
| connection adapter for plug-in base | LV429306                                               | LV429307     | LV432584                                        | LV432585     |
| Rear conn.                          |                                                        |              |                                                 |              |
| short terminal shields              | 2 x LV429515                                           | 2 x LV429516 | 2 x LV432591                                    | 2 x LV432592 |
| short rear connectors               | LV429235                                               | LV429235     | LV432475                                        | LV432475     |
| long rear connectors                | LV429236                                               | LV429236     | LV432476                                        | LV432476     |
| connection adapter for plug-in base | LV429306                                               | LV429307     | LV432584                                        | LV432585     |

| Connection                                                                          | Downstream distribution                                                             |              |                                                 |              |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------|-------------------------------------------------|--------------|
|  |  |              |                                                 |              |
| <b>Withdrawable devices</b>                                                         | <b>NSX / NSX Vigi (ELCB) / Vigi NSX 100/160/250</b>                                 |              | <b>NSX / NSX Vigi (ELCB) / Vigi NSX 400/630</b> |              |
|                                                                                     | <b>3P</b>                                                                           | <b>4P</b>    | <b>3P</b>                                       | <b>4P</b>    |
| Front conn.                                                                         |                                                                                     |              |                                                 |              |
| connection adapter for plug-in base                                                 | LV429306                                                                            | LV429307     | LV432584                                        | LV432585     |
| short on device terminal shields                                                    | LV429515                                                                            | LV429516     | LV432591                                        | LV432592     |
| on plug-in base                                                                     | LV429517                                                                            | LV429518     | LV432593                                        | LV432594     |
| Rear conn.                                                                          |                                                                                     |              |                                                 |              |
| short terminal shields                                                              | 2 x LV429515                                                                        | 2 x LV429516 | 2 x LV432591                                    | 2 x LV432592 |
| short rear connectors                                                               | LV429235                                                                            | LV429235     | LV432475                                        | LV432475     |
| long rear connectors                                                                | LV429236                                                                            | LV429236     | LV432476                                        | LV432476     |
| connection adapter for plug-in base                                                 | LV429306                                                                            | LV429307     | LV432584                                        | LV432585     |

(1) Metering and signaling features (ammeter...) can be added. Mounted on a ComPacT NSX, it has the same size than a ComPacT Vigi NSX. Refer to the corresponding column.

(2) Catalog number LVS03460 is recommended when installing an NSX with a motor mechanism.





(3) For devices with toggle only.

## ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX 100 to 630

Vertical mounting - W = 400 mm

All controls - Fixed, plug-in

Designed for PowerTag Energy 250/ 630 A  
Circuit breakers

| Mounting                                                                            |                                     | Device vertical, front connection                                                                                   |    |                                  |         |                     |    |                                                 |    |                     |    |
|-------------------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------------------------------------|----|----------------------------------|---------|---------------------|----|-------------------------------------------------|----|---------------------|----|
|    |                                     |                                    |    |                                  |         |                     |    |                                                 |    |                     |    |
| Devices                                                                             |                                     | Fixed                                                                                                               |    |                                  |         | Fixed               |    | Fixed / Plug-in (1)                             |    | Fixed / Plug-in (1) |    |
|                                                                                     |                                     | NSX / NSX Vigi (ELCB)<br>100/250 (2)                                                                                |    |                                  |         | Vigi NSX<br>100/250 |    | NSX / NSX Vigi (ELCB)<br>400/630 (2)            |    | Vigi NSX<br>400/630 |    |
|                                                                                     |                                     | Toggle                                                                                                              |    | Rotary handle<br>Motor mechanism |         | Toggle              |    | Toggle,<br>Rotary handle<br>Motor mechanism     |    | Toggle              |    |
| Number of devices per row                                                           |                                     | 1                                                                                                                   |    | 1                                |         | 1                   |    | 1                                               |    | 1                   |    |
| PowerTag 250/ 630A compatibility                                                    |                                     | ~                                                                                                                   |    | ~                                |         | ~                   |    | ~ (1)                                           |    | ~ (1)               |    |
| No. of vertical modules                                                             |                                     | 9 or 10                                                                                                             |    | 9 or 10                          |         | 11 or 12            |    | 12 or 14                                        |    | 14 or 16            |    |
| Mounting plates                                                                     |                                     | LVS03050                                                                                                            |    | LVS03051                         |         | LVS03050            |    | LVS03487                                        |    | LVS03487            |    |
| Adapter PrismaSeT G Active                                                          |                                     | LVS03596                                                                                                            |    | LVS03596                         |         | LVS03596            |    | -                                               |    | -                   |    |
| Front plates with cut-out                                                           |                                     | LVS03253 [9]                                                                                                        |    | LVS03253 [9]                     |         | LVS03293 [11]       |    | LVS03283 [12]                                   |    | LVS03299 [10]       |    |
| [No. of vertical modules] downstream                                                |                                     | -                                                                                                                   |    | -                                |         | -                   |    | -                                               |    | LVS03814 [4]        |    |
| downstream with PowerTag 250/ 630 A                                                 |                                     | LVS03811 [1]                                                                                                        |    | LVS03811 [1]                     |         | LVS03811 [1]        |    | LVS03812 [2]                                    |    | LVS03816 [6]        |    |
| Collar                                                                              |                                     | -                                                                                                                   |    | -                                |         | -                   |    | LV432534                                        |    | LV432534            |    |
| Connection                                                                          |                                     | Upstream from lateral busbars - Linergy LGY, BS, LGYE                                                               |    |                                  |         |                     |    |                                                 |    |                     |    |
|  |                                     |                                  |    |                                  |         |                     |    |                                                 |    |                     |    |
| Devices                                                                             |                                     | Fixed device                                                                                                        |    |                                  |         |                     |    | Plug-in device                                  |    |                     |    |
|                                                                                     |                                     | NSX / NSX Vigi (ELCB) / Vigi NSX<br>100/160/250                                                                     |    |                                  | 400/630 |                     |    | NSX / NSX Vigi (ELCB) / Vigi NSX<br>100/160/250 |    | 400/630             |    |
|                                                                                     |                                     | 3P                                                                                                                  | 4P | 3P                               | 4P      | 3P                  | 4P | 3P                                              | 4P | 3P                  | 4P |
| Connection                                                                          |                                     | must be made with insulated flexible bars > page G-22 and according to the drawings supplied by Schneider Electric. |    |                                  |         |                     |    |                                                 |    |                     |    |
| Front connection                                                                    | connection adapter for plug-in base | -                                                                                                                   |    | -                                |         | LV429306            |    | LV429307                                        |    | LV432584            |    |
|                                                                                     | short terminal shields              | -                                                                                                                   |    | -                                |         | LV429515            |    | LV429516                                        |    | LV432591            |    |
|                                                                                     | ong terminal shields                | LV429517                                                                                                            |    | LV429518                         |         | LV432593            |    | LV432594                                        |    | LV432593            |    |
| Connection                                                                          |                                     | Downstream distribution                                                                                             |    |                                  |         |                     |    |                                                 |    |                     |    |
|  |                                     |                                  |    |                                  |         |                     |    |                                                 |    |                     |    |
| Devices                                                                             |                                     | Fixed device                                                                                                        |    |                                  |         |                     |    | Plug-in device                                  |    |                     |    |
|                                                                                     |                                     | NSX / NSX Vigi (ELCB) / Vigi NSX<br>100/160/250                                                                     |    |                                  | 400/630 |                     |    | NSX / NSX Vigi (ELCB) / Vigi NSX<br>100/160/250 |    | 400/630             |    |
|                                                                                     |                                     | 3P                                                                                                                  | 4P | 3P                               | 4P      | 3P                  | 4P | 3P                                              | 4P | 3P                  | 4P |
| Front connection                                                                    | short terminal shields              | -                                                                                                                   |    | -                                |         | LV429515            |    | LV429516                                        |    | LV432591            |    |
|                                                                                     | long terminal shields               | LV429517                                                                                                            |    | LV429518                         |         | LV432593            |    | LV432594                                        |    | LV432593            |    |
|                                                                                     | connection adapter for plug-in base | -                                                                                                                   |    | -                                |         | LV429306            |    | LV429307                                        |    | LV432584            |    |
| Rear connection                                                                     | short terminal shields              | LV429515                                                                                                            |    | LV429516                         |         | LV432591            |    | LV432592                                        |    | 2 x LV432591        |    |
|                                                                                     | short rear connectors               | LV429235                                                                                                            |    | LV429235                         |         | LV432475            |    | LV432475                                        |    | LV432475            |    |
|                                                                                     | long rear connectors                | LV429236                                                                                                            |    | LV429236                         |         | LV432476            |    | LV432476                                        |    | LV432476            |    |
|                                                                                     | connection adapter for plug-in base | -                                                                                                                   |    | -                                |         | -                   |    | LV429306                                        |    | LV429307            |    |

(1) PowerTag NSX is not compatible with plug-in mounting

(2) Metering and signaling features (ammeter...) can be added. Mounted on a ComPacT NSX, it has the same size than a ComPacT Vigi NSX. Refer to the corresponding column.

## ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX 100/160/250



Vertical mounting

Toggle - Fixed

Designed for PowerTag Energy 250/ 630 A  
Circuit breakers

| Mounting                                        |                                                         | Vertical fixed                               |                     |                                 |                  |
|-------------------------------------------------|---------------------------------------------------------|----------------------------------------------|---------------------|---------------------------------|------------------|
|                                                 |                                                         |                                              |                     |                                 |                  |
| Devices                                         |                                                         | Toggle                                       |                     |                                 |                  |
|                                                 |                                                         | NSX/ NSX Vigi (ELCB)<br>100/160 (1)          | Vigi NSX<br>100/160 | NSX/ NSX Vigi (ELCB)<br>250 (1) | Vigi NSX<br>250  |
| Number of devices per row                       |                                                         | 3 x 4P or 4 x 3P                             | 3 x 4P or 4 x 3P    | 3 x 4P or 4 x 3P                | 3 x 4P or 4 x 3P |
| PowerTag 250/ 630 A compatibility               |                                                         | ⌋                                            | ⌋                   | ⌋                               | ⌋                |
| No. of vertical modules                         |                                                         | 6 or 7                                       | 8                   | 7 or 8                          | 9                |
| Mounting plates                                 |                                                         | LVS03420                                     | LVS03420            | LVS03420                        | LVS03420         |
| Front plates<br>[No. of<br>vertical<br>modules] | with cut-out                                            | LVS03243 [5]                                 | LVS03241 [7]        | LVS03243 [5]                    | LVS03241 [7]     |
|                                                 | downstream                                              | LVS03801 [1]                                 | LVS03801 [1]        | LVS03802 [2]                    | LVS03802 [2]     |
|                                                 | downstream with PowerTag 250/ 630 A                     | LVS03802 [2]                                 | LVS03802 [2]        | LVS03803 [3]                    | LVS03803 [3]     |
| Connection                                      |                                                         | Upstream from lateral busbars                |                     |                                 |                  |
|                                                 |                                                         |                                              |                     |                                 |                  |
| Fixed devices                                   |                                                         | NSX / NSX Vigi (ELCB) / Vigi NSX 100/160/250 |                     |                                 |                  |
|                                                 |                                                         | 3P                                           | 4P                  |                                 |                  |
| Linergy FC connection to busbars                |                                                         |                                              |                     |                                 |                  |
| Linergy LGY                                     | Linergy FC distribution blocks (with connection)        | LVS04403                                     | LVS04404            |                                 |                  |
| Linergy BS, LGYE                                | Linergy FC distribution blocks (without connection) (2) | LVS04407                                     | LVS04408            |                                 |                  |
| Other connections to busbars                    |                                                         |                                              |                     |                                 |                  |
| Front connection with cable (3)                 | long terminal shields                                   | LV429517                                     | LV429518            |                                 |                  |
| Rear connection with cable                      | short terminal shields                                  | LV429515                                     | LV429516            |                                 |                  |
|                                                 | short rear connectors                                   | LV429235                                     |                     |                                 |                  |
|                                                 | long rear connectors                                    | LV429236                                     |                     |                                 |                  |
| Accessories                                     |                                                         |                                              |                     |                                 |                  |
| Linergy FC tooth-caps                           |                                                         | LVS04809                                     |                     |                                 |                  |
| Divisible blanking plate                        |                                                         | LVS03249                                     |                     |                                 |                  |
| Divisible blanking plate + electronic trip unit |                                                         | LVS03222                                     |                     |                                 |                  |
| Connection                                      |                                                         | Downstream distribution                      |                     |                                 |                  |
|                                                 |                                                         |                                              |                     |                                 |                  |
| Fixed devices                                   |                                                         | NSX / NSX Vigi (ELCB) / Vigi NSX 100/160/250 |                     |                                 |                  |
|                                                 |                                                         | 3P                                           | 4P                  |                                 |                  |
| Front connection                                | long terminal shields                                   | LV429517                                     | LV429518            |                                 |                  |
| Rear connection (4)                             | short terminal shields                                  | LV429515                                     | LV429516            |                                 |                  |
|                                                 | short rear connectors                                   | LV429235                                     |                     |                                 |                  |
|                                                 | long rear connectors                                    | LV429236                                     |                     |                                 |                  |

(1) Metering and signaling features (ammeter...) can be added. Mounted on a ComPacT NSX, it has the same size than a ComPacT Vigi NSX. Refer to the corresponding column.

(2) Flexible bars on Linergy LGYE to be made according drawings supplied by Schneider Electric.

(3) For the ComPacT NSX100/250, the number of modules indicated is for supply via a Linergy FC distribution block.

For supply via cables, two additional modules are required; add an upstream plain front plate (LVS03802).

(4) Size reduced to one module downstream.






## ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX 100/160/250

Vertical mounting

Toggle - Plug-in

Circuit breakers

| Mounting                                                                            |                                                         | Vertical plug-in                                                                    |              |                                |              |                                |              |                                |              |
|-------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------------------------------------|--------------|--------------------------------|--------------|--------------------------------|--------------|--------------------------------|--------------|
|    |                                                         |    |              |                                |              |                                |              |                                |              |
| Devices                                                                             |                                                         | Toggle                                                                              |              |                                |              |                                |              |                                |              |
|                                                                                     |                                                         | NSX / NSX Vigi (ELCB) 100/160 (1)                                                   |              | Vigi NSX 100/160               |              | NSX / NSX Vigi (ELCB) 250 (1)  |              | Vigi NSX 250                   |              |
| Number of devices per row                                                           |                                                         | 3 x 4P or 4 x 3P                                                                    |              | 3 x 4P or 4 x 3P               |              | 3 x 4P or 4 x 3P               |              | 3 x 4P or 4 x 3P               |              |
| No. of vertical modules                                                             |                                                         | 9                                                                                   | 7            | 11                             | 9            | 10                             | 8            | 12                             | 10           |
| Mounting plates                                                                     |                                                         | LVS03421 (2)                                                                        | LVS03423 (3) | LVS03421 (2)                   | LVS03423 (3) | LVS03421 (2)                   | LVS03423 (3) | LVS03421 (2)                   | LVS03423 (3) |
| Front plates<br>[No. of vertical modules]                                           | upstream                                                | LVS03801 [1]<br>+ LVS03802 [2]                                                      | LVS03801 [1] | LVS03801 [1]<br>+ LVS03802 [2] | LVS03801 [1] | LVS03801 [1]<br>+ LVS03802 [2] | LVS03801 [1] | LVS03801 [1]<br>+ LVS03802 [2] | LVS03801 [1] |
|                                                                                     | with cut-out                                            | LVS03243 [5]                                                                        | LVS03243 [5] | LVS03241 [7]                   | LVS03241 [7] | LVS03243 [5]                   | LVS03243 [5] | LVS03241 [7]                   | LVS03241 [7] |
|                                                                                     | downstream                                              | LVS03801 [1]                                                                        | LVS03801 [1] | LVS03801 [1]                   | LVS03801 [1] | LVS03802 [2]                   | LVS03802 [2] | LVS03802 [2]                   | LVS03802 [2] |
| Connection                                                                          |                                                         | Upstream from lateral busbars                                                       |              |                                |              |                                |              |                                |              |
|    |                                                         |    |              |                                |              |                                |              |                                |              |
| Plug-in devices                                                                     |                                                         | NSX / NSX Vigi (ELCB) / Vigi NSX 100/160/250                                        |              |                                |              |                                |              |                                |              |
|                                                                                     |                                                         | 3P                                                                                  |              |                                |              | 4P                             |              |                                |              |
| Lineray FC connection to busbars                                                    |                                                         |                                                                                     |              |                                |              |                                |              |                                |              |
| Lineray LGY                                                                         | Lineray FC distribution blocks (with connection)        | LVS04405 (4)                                                                        |              |                                |              | LVS04406 (4)                   |              |                                |              |
|                                                                                     | Connection adapter for plug-in base                     | LV429306                                                                            |              |                                |              | LV429307                       |              |                                |              |
| Lineray BS, LGYE                                                                    | Lineray FC distribution blocks (without connection) (5) | LVS04407                                                                            |              |                                |              | LVS04408                       |              |                                |              |
|                                                                                     | Connection adapter for plug-in base                     | LV429306                                                                            |              |                                |              | LV429307                       |              |                                |              |
| Connection to lateral busbars with insulated flexible bars                          |                                                         |                                                                                     |              |                                |              |                                |              |                                |              |
| Front connection                                                                    | connection                                              | must be made with insulated flexible bars > page G-22.                              |              |                                |              |                                |              |                                |              |
|                                                                                     | long terminal shields                                   | LV429517                                                                            |              |                                |              | LV429518                       |              |                                |              |
|                                                                                     | short terminal shields                                  | LV429515                                                                            |              |                                |              | LV429516                       |              |                                |              |
|                                                                                     | connection adapter for plug-in base                     | LV429306                                                                            |              |                                |              | LV429307                       |              |                                |              |
| Rear connection                                                                     | short terminal shields                                  | 2 x LV429515                                                                        |              |                                |              | 2 x LV429516                   |              |                                |              |
|                                                                                     | short rear connectors                                   | LV429235                                                                            |              |                                |              |                                |              |                                |              |
|                                                                                     | long rear connectors                                    | LV429236                                                                            |              |                                |              |                                |              |                                |              |
|                                                                                     | connection adapter for plug-in base                     | LV429306                                                                            |              |                                |              | LV429307                       |              |                                |              |
| Accessories                                                                         |                                                         |                                                                                     |              |                                |              |                                |              |                                |              |
| Lineray FC tooth-caps                                                               |                                                         | LVS04809                                                                            |              |                                |              |                                |              |                                |              |
| Divisible blanking plate                                                            |                                                         | LVS03249                                                                            |              |                                |              |                                |              |                                |              |
| Divisible blanking plate + electronic trip unit                                     |                                                         | LVS03222                                                                            |              |                                |              |                                |              |                                |              |
| Connection                                                                          |                                                         | Downstream distribution                                                             |              |                                |              |                                |              |                                |              |
|  |                                                         |  |              |                                |              |                                |              |                                |              |
| Plug-in devices                                                                     |                                                         | NSX100/160, Vigi NSX100/160/250                                                     |              |                                |              |                                |              |                                |              |
|                                                                                     |                                                         | 3P                                                                                  |              |                                |              | 4P                             |              |                                |              |
| Front connection                                                                    | connection adapter for plug-in base                     | LV429306                                                                            |              |                                |              | LV429307                       |              |                                |              |
|                                                                                     | short terminal shields on device                        | LV429515                                                                            |              |                                |              | LV429516                       |              |                                |              |
|                                                                                     | long terminal shields on plug-in base                   | LV429517                                                                            |              |                                |              | LV429518                       |              |                                |              |
| Rear connection (6)                                                                 | short terminal shields                                  | 2 x LV429515                                                                        |              |                                |              | 2 x LV429516                   |              |                                |              |
|                                                                                     | short rear connectors                                   | LV429235                                                                            |              |                                |              |                                |              |                                |              |
|                                                                                     | long rear connectors                                    | LV429236                                                                            |              |                                |              |                                |              |                                |              |
|                                                                                     | connection adapter for plug-in base                     | LV429306                                                                            |              |                                |              | LV429307                       |              |                                |              |

(1) Metering and signaling features (ammeter...) can be added. Mounted on a ComPacT NSX, it has the same size than a ComPacT Vigi NSX. Refer to the corresponding column.

(2) Not compatible with Lineray FC distribution block.

(3) Compatible with Lineray FC distribution block.

(4) Catalog number LVS04924 is recommended when installing those references.

(5) Flexible bars on Lineray LGYE to be made according drawings supplied by Schneider Electric.

(6) Size reduced to one module downstream.



## ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX 100/160/250



Vertical mounting

Rotary handle, motor mechanism - Fixed

Designed for PowerTag Energy 250/ 630 A  
Circuit breakers

| Mounting                                                                          |                                     | Vertical fixed                                                                    |                                                                                   |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|-------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |                                     |  |                                                                                   |                                                                                     |                                                                                     |
| Devices                                                                           |                                     | Rotary handle, motor mechanism                                                    |                                                                                   |                                                                                     |                                                                                     |
|                                                                                   |                                     | NSX / NSX Vigi (ELCB)<br>100/160 (1)                                              | Vigi NSX<br>100/160                                                               | NSX / NSX Vigi (ELCB)<br>250 (1)                                                    | Vigi NSX<br>250                                                                     |
| Number of devices per row                                                         |                                     | 3 x 4P or 4 x 3P                                                                  | 3 x 4P or 4 x 3P                                                                  | 3 x 4P or 4 x 3P                                                                    | 3 x 4P or 4 x 3P                                                                    |
| PowerTag 250/ 630 A compatibility                                                 |                                     |  |  |  |  |
| No. of vertical modules (2)                                                       |                                     | 6 or 7                                                                            | 8 or 9                                                                            | 7 or 8                                                                              | 9 or 10                                                                             |
| Mounting plates                                                                   |                                     | LVS03422                                                                          | LVS03422                                                                          | LVS03422                                                                            | LVS03422                                                                            |
| Front plates<br>[No. of<br>vert. mod.]                                            | with cut-out                        | LVS03243 (5)                                                                      | LVS03244 (7)                                                                      | LVS03243 (5)                                                                        | LVS03244 (7)                                                                        |
|                                                                                   | downstream                          | LVS03801 (1)                                                                      | LVS03801 (1)                                                                      | LVS03802 (2)                                                                        | LVS03802 (2)                                                                        |
|                                                                                   | downstream with PowerTag 250/ 630 A | LVS03802 (2)                                                                      | LVS03802 (2)                                                                      | LVS03803 (3)                                                                        | LVS03803 (3)                                                                        |
| Collar                                                                            |                                     | -                                                                                 | LV429285                                                                          | -                                                                                   | LV429285                                                                            |
| IP40 front-panel escutcheons                                                      |                                     | -                                                                                 | LV429316 (3)                                                                      | -                                                                                   | LV429316 (3)                                                                        |

| Connection                                                                          |                                                         | Upstream from lateral busbars               |              |
|-------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------|--------------|
|  |                                                         |                                             |              |
| Fixed devices                                                                       |                                                         | NSX / NSX Vigi (ELCB) / Vigi NSX100/160/250 |              |
|                                                                                     |                                                         | 3P                                          | 4P           |
| Linergy FC connection to busbars                                                    |                                                         |                                             |              |
| Linergy LGY                                                                         | Linergy FC distribution blocks (with connection)        | LVS04405 (4)                                | LVS04406 (4) |
| Linergy BS, LGYE                                                                    | Linergy FC distribution blocks (without connection) (5) | LVS04407                                    | LVS04408     |
| Accessories                                                                         |                                                         |                                             |              |
| Linergy FC tooth-caps                                                               |                                                         | LVS04809                                    |              |
| Divisible blanking plate                                                            |                                                         | LVS03249                                    |              |
| Blanking plate fract. + electronic trip unit                                        |                                                         | LVS03222                                    |              |

| Connection                                                                          |                        | Downstream distribution                     |          |
|-------------------------------------------------------------------------------------|------------------------|---------------------------------------------|----------|
|  |                        |                                             |          |
| Fixed devices                                                                       |                        | NSX / NSX Vigi (ELCB) / Vigi NSX100/160/250 |          |
|                                                                                     |                        | 3P                                          | 4P       |
| Front connection                                                                    | long terminal shields  | LV429517                                    | LV429518 |
| Rear connection (6)                                                                 | short terminal shields | LV429515                                    | LV429516 |
|                                                                                     | short rear connectors  | LV429235                                    |          |
|                                                                                     | long rear connectors   | LV429236                                    |          |

(1) Metering and signaling features (ammeter...) can be added. Mounted on a ComPacT NSX, it has the same size than a ComPacT Vigi NSX. Refer to the corresponding column.

(2) For the ComPacT NSX100/250, the number of modules indicated is for supply via a Linergy FC distribution block. For supply via cables, two additional modules are required; add an upstream plain front plate (LVS03802).

(3) For ammeter, take LV429285 + LV429318 catalog numbers.

(4) Catalog number LVS04924 is recommended when installing those references.

(5) Flexible bars on Linergy LGYE to be made according drawings supplied by Schneider Electric.



(6) Size reduced to one module downstream.

## ComPacT, ComPacT Vigi (ELCB) and VigiComPacT NSX 100/160/250

Vertical mounting

Rotary handle, motor mechanism - Plug-in

Circuit breakers

| Mounting                                                                            |                                                            | Vertical plug-in                                                                  |                     |                                  |                  |
|-------------------------------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------|----------------------------------|------------------|
|    |                                                            |  |                     |                                  |                  |
| Devices                                                                             |                                                            | Rotary handle, motor mechanism - plug-in                                          |                     |                                  |                  |
|                                                                                     |                                                            | NSX / NSX Vigi (ELCB) (1)<br>100/160                                              | Vigi NSX<br>100/160 | NSX / NSX Vigi (ELCB) (1)<br>250 | Vigi NSX<br>250  |
| Number of devices per row                                                           |                                                            | 3 x 4P or 4 x 3P                                                                  | 3 x 4P or 4 x 3P    | 3 x 4P or 4 x 3P                 | 3 x 4P or 4 x 3P |
| No. of vertical modules (2)                                                         |                                                            | 7                                                                                 | 9                   | 8                                | 10               |
| Mounting plates                                                                     |                                                            | LVS03422                                                                          | LVS03422            | LVS03422                         | LVS03422         |
| Front plates<br>[No. of vertical<br>modules]                                        | upstream                                                   | LVS03801 [1]                                                                      | LVS03801 [1]        | LVS03801 [1]                     | LVS03801 [1]     |
|                                                                                     | with cut-out                                               | LVS03243 [5]                                                                      | LVS03244 [7]        | LVS03243 [5]                     | LVS03244 [7]     |
|                                                                                     | downstream                                                 | LVS03801 [1]                                                                      | LVS03801 [1]        | LVS03802 [2]                     | LVS03802 [2]     |
| Collar                                                                              |                                                            | -                                                                                 | LV429285            | -                                | LV429285         |
| IP40 escutcheons                                                                    |                                                            | -                                                                                 | LV429316 (3)        | -                                | LV429316 (3)     |
| Connection                                                                          |                                                            | Upstream from lateral busbars                                                     |                     |                                  |                  |
|   |                                                            |                                                                                   |                     |                                  |                  |
| Plug-in devices                                                                     |                                                            | NSX / NSX Vigi (ELCB) / Vigi NSX100/160/250                                       |                     |                                  |                  |
|                                                                                     |                                                            | 3P                                                                                | 4P                  |                                  |                  |
| Linergy FC connection to busbars                                                    |                                                            |                                                                                   |                     |                                  |                  |
| Linergy<br>LGY                                                                      | Linergy FC distribution blocks<br>(with connection)        | LVS04405 (4)                                                                      | LVS04406 (4)        |                                  |                  |
|                                                                                     | Connection adapter for<br>plug-in base                     | LV429306                                                                          | LV429307            |                                  |                  |
| Linergy BS,<br>LGYE                                                                 | Linergy FC distribution blocks<br>(without connection) (5) | LVS04407                                                                          | LVS04408            |                                  |                  |
|                                                                                     | Connection adapter for plug-in base                        | LV429306                                                                          | LV429307            |                                  |                  |
| Accessories                                                                         |                                                            |                                                                                   |                     |                                  |                  |
| Linergy FC tooth-caps                                                               |                                                            | LVS04809                                                                          |                     |                                  |                  |
| Divisible blanking plate                                                            |                                                            | LVS03249                                                                          |                     |                                  |                  |
| Blanking plate fract. + electronic trip unit                                        |                                                            | LVS03222                                                                          |                     |                                  |                  |
| Connection                                                                          |                                                            | Downstream distribution                                                           |                     |                                  |                  |
|  |                                                            |                                                                                   |                     |                                  |                  |
| Plug-in devices                                                                     |                                                            | NSX / NSX Vigi (ELCB) / Vigi NSX100/160/250                                       |                     |                                  |                  |
|                                                                                     |                                                            | 3P                                                                                | 4P                  |                                  |                  |
| Front<br>connection                                                                 | long terminal shields                                      | LV429517                                                                          | LV429518            |                                  |                  |
|                                                                                     | short terminal shields                                     | LV429515                                                                          | LV429516            |                                  |                  |
|                                                                                     | connection adapter for plug-in<br>base                     | LV429306                                                                          | LV429307            |                                  |                  |
| Rear<br>connection<br>(6)                                                           | short terminal shields                                     | 2 x LV429515                                                                      | 2 x LV429516        |                                  |                  |
|                                                                                     | short rear connectors                                      | LV429235                                                                          |                     |                                  |                  |
|                                                                                     | long rear connectors                                       | LV429236                                                                          |                     |                                  |                  |
|                                                                                     | connection adapter for plug-in<br>base                     | LV429306                                                                          | LV429307            |                                  |                  |

(1) Metering and signaling features (ammeter...) can be added. Mounted on a ComPacT NSX, it has the same size than a ComPacT Vigi NSX. Refer to the corresponding column.

(2) For the ComPacT NSX100/250, the number of modules indicated is for supply via a Linergy FC distribution block.

For supply via cables, two additional modules are required; add an upstream plain front plate (LVS03802).

(3) For ammeter, take LV429285 + LV429318 catalog numbers.

(4) Catalog number LVS04924 is recommended when installing those references.

(5) Flexible bars on Linergy LGYE to be made according drawings supplied by Schneider Electric.










(6) Size reduced to one module downstream.

## ComPacT and ComPacT Vigi (ELCB) NSXm up to 160

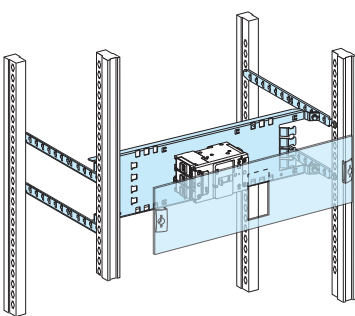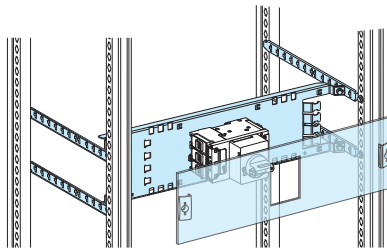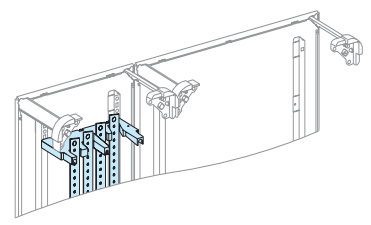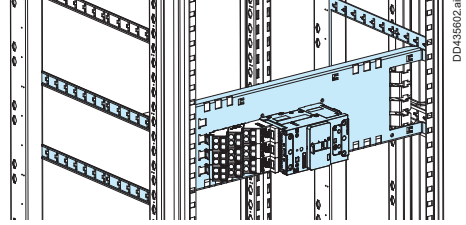Horizontal mounting

Toggle, rotary handle - Fixed

Circuit breakers










| Mounting                                                                            |  | Horizontal fixed                                                                                    |                                                                                                      |
|-------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
|    |  | <br>DD386146.ai    | <br>DD386147.ai    |
| Devices                                                                             |  | Toggle                                                                                              | Direct rotary handle                                                                                 |
|                                                                                     |  | NSXm                                                                                                | NSXm Vigi (ELCB)                                                                                     |
| Number of devices per row                                                           |  | 1 x 3P or 4P                                                                                        | 1 x 3P or 4P                                                                                         |
| No. of vertical modules                                                             |  | 3                                                                                                   | 3                                                                                                    |
| Mounting plates                                                                     |  | LVS03409                                                                                            | LVS03409                                                                                             |
| Front plates with cut-out<br>[No. of vertical modules]                              |  | LVS03330 [3]                                                                                        | LVS03330 [3]                                                                                         |
| Connection                                                                          |  | Upstream from lateral Linergy LGY, BS, LGYE busbars                                                 |                                                                                                      |
|    |  | <br>DD386150.ai   | <br>DD386151.ai   |
| Devices                                                                             |  | Toggle                                                                                              | Direct rotary handle                                                                                 |
|                                                                                     |  | NSXm, NSXm Vigi (ELCB)                                                                              | NSXm                                                                                                 |
|                                                                                     |  | 3P                                                                                                  | 4P                                                                                                   |
| Connection                                                                          |  | Connections must be made                                                                            | Connections must be made                                                                             |
| Long terminal shields                                                               |  | LV426912                                                                                            | LV426913                                                                                             |
| Connection                                                                          |  | Downstream distribution                                                                             |                                                                                                      |
|                                                                                     |  | Insulated Linergy BW busbars                                                                        | Rear Linergy BS busbars                                                                              |
|  |  | <br>DD119429.ai  | <br>DD380777.eps |
| Busbars                                                                             |  | Linergy BW > page G-16                                                                              | LVS04191 + copper bars > page G-27                                                                   |
| Prefabricated connection                                                            |  | LVS04021, LVS04145, LVS04146, LVS04148                                                              | LVS04030                                                                                             |
| Connection                                                                          |  | Downstream distribution                                                                             |                                                                                                      |
|                                                                                     |  | Linergy BS multi-stage busbars                                                                      | Linergy DP distribution block                                                                        |
|  |  | <br>DD380761.eps | <br>DD435602.ai  |
| Busbars / Distribution block                                                        |  | LVS04192 + copper bars > pages G-10, G-11                                                           | LVS04038, LVS04039 > page G-17                                                                       |
| Prefabricated connection                                                            |  | Connection must be made                                                                             |                                                                                                      |

## ComPacT and ComPacT Vigi (ELCB) NSXm up to 160

Vertical mounting

Toggle, rotary handle - Fixed

Circuit breakers

| Mounting                                                                            |                                                  | Vertical fixed                                                                       |                                     |                                                                                       |                                           |
|-------------------------------------------------------------------------------------|--------------------------------------------------|--------------------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------|-------------------------------------------|
|    |                                                  |     |                                     |     |                                           |
| Devices                                                                             |                                                  | Toggle                                                                               |                                     | Direct rotary handle                                                                  |                                           |
|                                                                                     |                                                  | NSXm                                                                                 | NSXm Vigi (ELCB)                    | NSXm                                                                                  |                                           |
| Number of devices per row                                                           |                                                  | 5 x 3P or 4 x 4P                                                                     | 4 x 3P or 4P                        | 5 x 3P or 4 x 4P                                                                      |                                           |
| No. of vertical modules(1)                                                          |                                                  | 5                                                                                    | 5                                   | 5                                                                                     |                                           |
| Mounting plates                                                                     |                                                  | LVS03410                                                                             | LVS03406                            | LVS03410                                                                              |                                           |
| Front plates<br>[No. of vertical modules]                                           | With cut-out                                     | LVS03205 [5]                                                                         | LVS03205 [5]                        | LVS03226 [5] - 3P<br>LVS03227 [5] - 4P                                                |                                           |
|                                                                                     | Upstream                                         | LVS03802 [2]                                                                         | LVS03802 [2]                        | LVS03802 [2]                                                                          |                                           |
|                                                                                     | Downstream                                       | LVS03801 [1]                                                                         | LVS03801 [1]                        | LVS03801 [1]                                                                          |                                           |
| Connection                                                                          |                                                  | Upstream from lateral Linergy LGY, BS, LGYE busbars                                  |                                     |                                                                                       |                                           |
|    |                                                  |     |                                     |     |                                           |
| Devices                                                                             |                                                  | NSXm, Toggle/Direct rotary handle - with Everlink lug                                |                                     | NSXm Vigi (ELCB), Toggle/Direct rotary handle - with Everlink lug                     |                                           |
| Number of poles                                                                     |                                                  | 3P                                                                                   | 4P                                  | 3P                                                                                    | 4P                                        |
| Number of devices per row                                                           |                                                  | 5 x 3P                                                                               | 4 x 4P                              | 4 x 3P                                                                                | 4 x 4P                                    |
| Linerigy FC connection to busbars                                                   |                                                  |                                                                                      |                                     |                                                                                       |                                           |
| (With connection)                                                                   | Linerigy LGY                                     | LVS04410                                                                             | LVS04411                            | LVS04416                                                                              | LVS04411                                  |
|                                                                                     | Linerigy BS, LGYE                                | LVS04412                                                                             | LVS04413                            | LVS04417                                                                              | LVS04413                                  |
| (Without connection)                                                                | Linerigy BS, LGYE, LGY                           | LVS04419                                                                             | LVS04420                            | LVS04418                                                                              | LVS04420                                  |
| Mounting plates                                                                     |                                                  | LVS03416                                                                             | LVS03416                            | LVS03416                                                                              | LVS03416                                  |
| Front plates<br>[No. of vertical modules]                                           | With cut-out                                     | LVS03205 [5]                                                                         | LVS03205 [5]                        | LVS03205 [5]                                                                          | LVS03205 [5]                              |
|                                                                                     | Downstream                                       | LVS03802 [2]                                                                         | LVS03802 [2]                        | LVS03802 [2]                                                                          | LVS03802 [2]                              |
| Tooth-caps [No. of tooth-caps]                                                      |                                                  | LVS04810 [12]                                                                        | LVS04810 [12]                       | LVS04810 [12]                                                                         | LVS04810 [12]                             |
| Accessories                                                                         |                                                  |                                                                                      |                                     |                                                                                       |                                           |
|  |                                                  |  |                                     |  |                                           |
| Connection                                                                          |                                                  | Connections must be made                                                             |                                     | Connections must be made                                                              |                                           |
| Long terminal shields                                                               |                                                  | LV426912                                                                             | LV426913                            | LV426912                                                                              | LV426913                                  |
| Blanking plate                                                                      | Strip                                            | LVS03220                                                                             | LVS03220                            | LVS03220                                                                              | LVS03220                                  |
|                                                                                     | Divisible                                        | LVS03221                                                                             | LVS03221                            | LVS03221                                                                              | LVS03221                                  |
| Connection                                                                          |                                                  | Downstream distribution                                                              |                                     |                                                                                       |                                           |
|  |                                                  |   |                                     |    |                                           |
| Busbars                                                                             |                                                  | Linerigy BW > page G-14                                                              |                                     | LVS04191 + copper bars > page G-9                                                     |                                           |
| Connection                                                                          | LVS04030, LVS04145, LVS04146, LVS04147, LVS04148 |                                                                                      | LVS04145, LVS04146 (centred device) |                                                                                       | LVS04192 + copper bars > pages G-10, G-11 |
|                                                                                     |                                                  |                                                                                      |                                     |                                                                                       | Must be made                              |

(1) For ComPacT NSXm up to 160, the number of modules indicated is for supply via a Linergy FC distribution block. For supply via cables, two additional modules are required; add an upstream plain front plate (LVS03802).






## ComPacT and ComPacT Vigi (ELCB) NSXm up to 160

Vertical mounting




Toggle, rotary handle - Fixed

## Circuit breakers

| Connection                                                                        | Downstream distribution                                                           |                                                                                   |                                                                                     |                                |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------|
|                                                                                   | Distribution block Linergy DX1P, 160 A                                            | Distribution block Linergy DX 4P, 125 A/160 A                                     | Distribution block Linergy DP 3P/4P                                                 |                                |
|  |  |  |  |                                |
| Distribution block                                                                | LVS04031 > page G-24                                                              | LVS04045 > page G-24                                                              | LVS04046 > page G-24                                                                | LVS04038, LVS04039 > page G-17 |
| Connection                                                                        | LVS04149                                                                          | LVS04047                                                                          | included                                                                            |                                |
| Rail                                                                              |                                                                                   |                                                                                   |                                                                                     | LVS03402 (W650)                |

## ComPacT and ComPacT Vigi (ELCB) NSXm up to 160

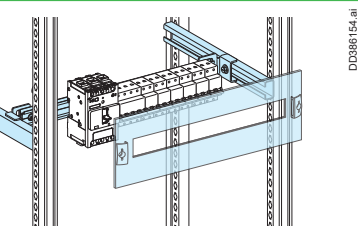Modular devices 160 A

| Mounting                                                                            | Modular rail                                                                        |                           |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------|
|  |  |                           |
| <b>Devices</b>                                                                      | <b>Toggle</b>                                                                       |                           |
|                                                                                     | <b>NSXm</b>                                                                         | <b>NSXm Vigi (ELCB)</b>   |
| Number of devices per row                                                           | 5 x 3P or 4 x 4P                                                                    | 4 x 3P or 4P              |
| No. of vertical modules                                                             | 5 (1)                                                                               | 5 (2)                     |
| Rail [48 module of 9mm]                                                             | LVS03402 (adjustable) (3)                                                           | LVS03402 (adjustable) (3) |
| Modular front plates                                                                | With cut out<br>LVS03205                                                            | LVS03205                  |
| Blanking plate                                                                      | Strip<br>LVS03220                                                                   | LVS03220                  |
|                                                                                     | Divisible<br>LVS03221                                                               | LVS03221                  |
| <b>Connection</b>                                                                   |  |                           |
|                                                                                     |  |                           |
| Rail                                                                                | LVS03402 (W650)                                                                     |                           |

(1) With Linergy DP, the number of vertical modules will be 7.

(2) With Linergy DP, the number of vertical modules will be 8.

(3) Can be completed by a rail (cat no. LVS04226) + raiser (cat no. LVS04225) to install modular devices.

**Note:** Width of NSXm 160 circuit breaker:




- NSXm 160 - 3P - 9 modules
- NSXm 160 - 4P - 12 modules
- NSXm VIGI 160 - 3P or 4P - 12 modules

## ComPacT and ComPacT Vigi (ELCB) NSXm up to 160

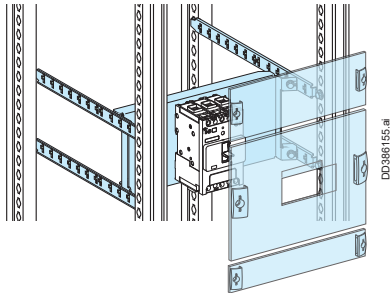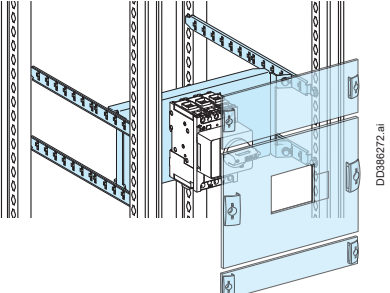Vertical mounting - W = 400 mm

Toggle, rotary handle - Fixed

Circuit breakers



| Mounting                                                                          |              | Vertical Fixed                                                                                                                                                       |                  |                      |
|-----------------------------------------------------------------------------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|----------------------|
|  |              |   |                  |                      |
| Devices                                                                           |              | Toggle                                                                                                                                                               | NSXm Vigi (ELCB) | Direct rotary handle |
|                                                                                   |              | NSXm                                                                                                                                                                 |                  | NSXm                 |
| Number of devices per row                                                         |              | 1 x 3P or 4P                                                                                                                                                         | 1 x 3P or 4P     | 1 x 3P or 4P         |
| No. of vertical modules                                                           |              | 8                                                                                                                                                                    | 8                | 8                    |
| Mounting plates                                                                   |              | LVS03405                                                                                                                                                             | LVS03405         | LVS03405             |
| Front plates<br>[No. of vertical modules]                                         | With cut out | LVS03225 [5]                                                                                                                                                         | LVS03225 [5]     | LVS03225 [5]         |
|                                                                                   | Upstream     | LVS03812 [2]                                                                                                                                                         | LVS03812 [2]     | LVS03812 [2]         |
|                                                                                   | Downstream   | LVS03811 [1]                                                                                                                                                         | LVS03811 [1]     | LVS03811 [1]         |


## ComPacT INS-INV630b to 1600


## ComPacT INS-INV2000-2500

## Vertical fixed mounting

## Switch-disconnectors

| Mounting                                                                          |              | Vertical fixed                                                                                                                                                                |                  |
|-----------------------------------------------------------------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
|  |              |                                                                                              |                  |
| Devices                                                                           |              | Fixed device                                                                                                                                                                  |                  |
|                                                                                   |              | INS-INV630b/1600                                                                                                                                                              | INS-INV2000/2500 |
|                                                                                   |              | 3P                                                                                                                                                                            | 4P               |
| Number of devices per row                                                         |              | 1                                                                                                                                                                             | 1                |
| No. of vertical modules                                                           |              | 14                                                                                                                                                                            | 16               |
| Mounting plates                                                                   |              | LVS03501                                                                                                                                                                      | LVS03501         |
| Front plates<br>[No. of vertical modules]                                         | upstream     | LVS03804 [4]                                                                                                                                                                  | LVS03803 [3]     |
|                                                                                   | with cut-out | LVS03713 [6]                                                                                                                                                                  | LVS03715 [10]    |
|                                                                                   | downstream   | LVS03804 [4]                                                                                                                                                                  | LVS03803 [3]     |
| Characteristics                                                                   |              | Depending on the type of front connection, an INS-INV2000-2500 can be mounted in a 400 mm or 600 mm deep enclosure. For rear connection, a 600 mm deep enclosure is required. |                  |

| Connection                                                                          |  | Upstream on incomer                                                                 |                  |
|-------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|------------------|
|  |  |  |                  |
| Fixed device                                                                        |  | INS-INV630b/1600                                                                    | INS-INV2000/2500 |
|                                                                                     |  | 3P                                                                                  | 4P               |
| Vertical connection adapters                                                        |  | 31301 (1)                                                                           | 33975 (1)        |
| Cable-lug adapters                                                                  |  | 33644 (1)                                                                           | 33976 (1)        |
| Connection                                                                          |  | -                                                                                   | must be made     |
| Terminal extension bar support                                                      |  | -                                                                                   | LVS04694         |

| Connection                                                                          |  | Downstream distribution via Linergy LGY, LGYE, or BS busbars                        |                  |
|-------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|------------------|
|  |  |  |                  |
| Fixed device                                                                        |  | INS-INV630b/1600                                                                    | INS-INV2000/2500 |
|                                                                                     |  | 3P                                                                                  | 4P               |
| Connection LGY                                                                      |  | LVS04481                                                                            | -                |
| Connection BS, LGYE                                                                 |  | must be made (3)                                                                    | must be made (3) |
| Cover for busbars connection                                                        |  | LVS04926 (2)                                                                        | LVS04926 (2)     |
| Free support                                                                        |  | -                                                                                   | 2 x LVS04662     |

(1) Vertical connection adapters and cable-lug adapters are not compatible with input voltage  $\geq 500$  V.

(2) Partitioning of devices must be made.

(3) Connection to be made according to the busbar drawings supplied by Schneider Electric.

Selection of busbars: Linergy LGY > page G-4, Linergy LGYE > page G-5, Linergy BS > page G-6.

## ComPacT INS-INV250 to 630

Horizontal / Vertical fixed mounting

Designed for PowerTag Energy 250/ 630 A  
Switch-disconnectors

| Mounting                                           |                                     | Horizontal fixed             |                  | Vertical fixed            |                               |
|----------------------------------------------------|-------------------------------------|------------------------------|------------------|---------------------------|-------------------------------|
|                                                    |                                     |                              |                  |                           |                               |
| Devices                                            |                                     | Fixed device                 |                  |                           |                               |
|                                                    |                                     | INS-INV250                   | INS-INV320/630   | INS-INV250                | INS-INV320/400 INS-INV500/630 |
| Number of devices per row                          |                                     | 1                            | 1                | 1 2/3                     | 1                             |
| PowerTag 250/ 630 A compatibility                  |                                     | ~                            | ~                | ~                         | ~                             |
| No. of vertical modules                            |                                     | 4                            | 5                | 7 or 8 (1)                | 10 or 12 11 or 13             |
| Mounting plates                                    |                                     | LVS03412                     | LVS03452         | LVS03420                  | LVS03461 LVS03461             |
| Front plates<br>[No. of vertical modules]          | upstream                            | -                            | -                | LVS03801 (1)              | - LVS03801 (1)                |
|                                                    | with cut-out                        | LVS03617 (4)                 | LVS03658 (5)     | LVS03248 (5) LVS03620 (5) | LVS03274 (10) LVS03274 (10)   |
|                                                    | downstream                          | -                            | -                | LVS03801 (1)              | -                             |
|                                                    | downstream with PowerTag 250/ 630 A | -                            | -                | LVS03802 (2)              | LVS03802 (2) LVS03802 (2)     |
| Connection                                         |                                     | Upstream via lateral busbars |                  |                           |                               |
| Fixed device                                       |                                     | INS-INV250 3P 4P             | INS-INV320/630   | INS-INV250                | INS-INV320/630                |
| Linery LGY                                         |                                     |                              |                  |                           |                               |
| Prefabricated connection                           |                                     | LVS04427 (2) LVS04428 (2)    | must be made (3) | -                         | must be made (3)              |
| Distribution block Linery FC                       |                                     | -                            | -                | LVS04404                  | -                             |
| Long terminal shields                              |                                     | -                            | LV432594         | -                         | LV432594                      |
| Linery BS, LGYE                                    |                                     |                              |                  |                           |                               |
| Connection                                         |                                     | must be made (3)             |                  | -                         | -                             |
| Linery FC distribution blocks (without connection) |                                     | -                            |                  | LVS04408                  | must be made                  |
| Long terminal shields                              |                                     | LV429518                     | LV432594         | -                         | LV432594                      |
| Accessories                                        |                                     |                              |                  |                           |                               |
| Linery FC tooth-caps                               |                                     | -                            |                  | LVS04809                  | -                             |
| Connection                                         |                                     | Downstream distribution      |                  |                           |                               |
|                                                    |                                     |                              |                  |                           |                               |
| Fixed device                                       |                                     | INS-INV250                   | INS-INV320/630   | INS-INV250                | INS-INV320/630                |
| Front connection (4)                               | long terminal shields               | LV429518                     | LV432594         | LV429518                  | LV432594                      |
|                                                    | short terminal shields              | LV432516                     | LV432592         | LV432516                  | LV432592                      |
|                                                    | short rear connectors               | LV429235                     | LV432475         | LV429235                  | LV432475                      |
|                                                    | long rear connectors                | LV429236                     | LV432476         | LV429236                  | LV432476                      |

(1) For the ComPacT INS-INV250, the number of modules indicated is for supply via a Linery FC distribution block.

For supply via cables, two additional modules are required; add an upstream plain front plate (LVS03802).

(2) Compatible with Linery LGYE vertical busbar.

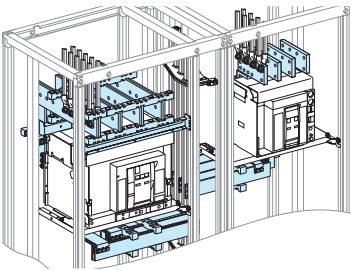
(3) To be made according to the busbar drawings supplied by Schneider Electric.


(4) For rear connection, size reduced one module; a plain downstream front plate (LVS03801) is not needed.


## Source-changeover

Possible combinations ComPacT NSX100/630, NS630b/1600,  
MasterPact MTZ1 06/16, MTZ2 08/32

## Source-changeover

| Manual source-changeover                                                          |                      |        |         |               |               |                                            |                                            |                                             |
|-----------------------------------------------------------------------------------|----------------------|--------|---------|---------------|---------------|--------------------------------------------|--------------------------------------------|---------------------------------------------|
|  |                      |        |         |               |               |                                            |                                            |                                             |
| Type of device                                                                    | Type of interlocking |        |         |               |               |                                            |                                            |                                             |
|                                                                                   | Complete assembly    | Toggle | Keylock | Rotary handle | On base plate | Cable-type with 2 devices side-by-side (2) | Cable-type with 3 devices side-by-side (2) | Cable-type with 2 devices one above another |
| INS250 (rating 100 to 250)                                                        |                      |        |         |               |               |                                            |                                            |                                             |
| INV100 to INV250 (1)                                                              |                      |        |         |               |               |                                            |                                            |                                             |
| INS320 to INS630                                                                  |                      |        |         |               |               |                                            |                                            |                                             |
| INV320 to INV630 (1)                                                              |                      |        |         |               |               |                                            |                                            |                                             |
| NSX100 to NSX250                                                                  |                      |        |         |               |               |                                            |                                            |                                             |
| NSX400 to NSX630                                                                  |                      |        |         |               |               |                                            |                                            |                                             |
| NS630b to NS1600                                                                  |                      |        |         |               |               |                                            |                                            |                                             |
| NT06 to 16                                                                        |                      |        |         |               |               |                                            |                                            |                                             |
| NW08 to 32                                                                        |                      |        |         |               |               |                                            |                                            |                                             |

| Remote-operated source-changeover systems - Mechanical interlocking system          |                                                  |        |        |        |        |
|-------------------------------------------------------------------------------------|--------------------------------------------------|--------|--------|--------|--------|
|  |                                                  |        |        |        |        |
| Devices                                                                             | Combination of ComPacT NSX "S1" and "S2" devices |        |        |        |        |
| "S1"                                                                                | "S2"                                             |        |        |        |        |
|                                                                                     | NSX100                                           | NSX160 | NSX250 | NSX400 | NSX630 |
| NSX100 Rating 12.5...100 A                                                          |                                                  |        |        |        |        |
| NSX160 Rating 12.5...160 A                                                          |                                                  |        |        |        |        |
| NSX250 Rating 12.5...250 A                                                          |                                                  |        |        |        |        |
| NSX400 Rating 160...400 A                                                           |                                                  |        |        |        |        |
| NSX630 Rating 250...630 A                                                           |                                                  |        |        |        |        |
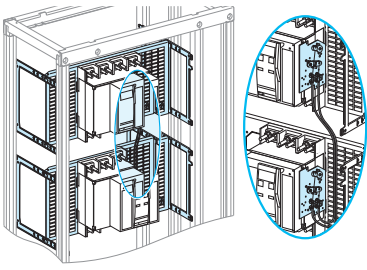
|  |                                                               |            |            |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------|------------|------------|
| Devices                                                                             | Combination of "S1" and "S2" devices, Interlocking via cables |            |            |
| "S1"                                                                                | "S2"                                                          |            |            |
|                                                                                     | NS630b to NS1600                                              | NT06 to 16 | NW08 to 40 |
| NS630b to NS1600                                                                    |                                                               |            |            |
| NT06 to 16                                                                          |                                                               |            |            |
| NW08 to 40                                                                          |                                                               |            |            |

(1) Visible break function.

(2) In 2 or 3 cubicles.





Possible combinations.



# Manual or remote-operated or automatic source-changeover

## MasterPact MTZ2 08/32, front connection S1 device identical to S2 device

## Source-changeover





| Mounting                                                                            |              | Front connection with cables                                                                                                                                                               |              |                     |               |
|-------------------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|---------------|
|    |              |                                                                                                           |              |                     |               |
| Devices                                                                             |              | Fixed device                                                                                                                                                                               |              | Withdrawable device |               |
| Number of devices per row                                                           |              | 2                                                                                                                                                                                          | 2            | 2                   | 2             |
| Number of vertical modules                                                          |              | 31                                                                                                                                                                                         | 34           | 33                  | 36            |
| Mounting plates                                                                     |              | LVS03500                                                                                                                                                                                   | LVS03500     | LVS03500            | LVS03500      |
|                                                                                     |              | S1 device                                                                                                                                                                                  |              |                     |               |
| Front plates<br>[No. of vertical<br>modules]                                        | upstream     | NW08/16                                                                                                                                                                                    | NW20/32      | NW08/16             | NW20/32       |
|                                                                                     | with cut-out | LVS03804 [4]                                                                                                                                                                               | LVS03805 [5] | LVS03804 [4]        | LVS03805 [5]  |
|                                                                                     | downstream   | LVS03711 [9]                                                                                                                                                                               | LVS03711 [9] | LVS03710 [10]       | LVS03710 [10] |
|                                                                                     |              | S2 device                                                                                                                                                                                  |              |                     |               |
| Front plates<br>[No. of vertical<br>modules]                                        | upstream     | NW08/16                                                                                                                                                                                    | NW20/32      | NW08/16             | NW20/32       |
|                                                                                     | with cut-out | -                                                                                                                                                                                          | -            | -                   | -             |
|                                                                                     | downstream   | LVS03711 [9]                                                                                                                                                                               | LVS03711 [9] | LVS03710 [10]       | LVS03710 [10] |
|                                                                                     |              | LVS03804 [4]                                                                                                                                                                               | LVS03805 [5] | LVS03804 [4]        | LVS03805 [5]  |
| Connection                                                                          |              |                                                                                                                                                                                            |              |                     |               |
|  |              |                                                                                                                                                                                            |              |                     |               |
| Devices                                                                             |              | Fixed device                                                                                                                                                                               |              | Withdrawable device |               |
|                                                                                     |              | S1 device                                                                                                                                                                                  |              |                     |               |
|                                                                                     |              | NW08/16                                                                                                                                                                                    | NW20/32      | NW08/16             | NW20/32       |
| Upstream connection                                                                 |              | Vertical rear connections supplied with the device                                                                                                                                         |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
|                                                                                     |              | S2 device                                                                                                                                                                                  |              |                     |               |
|                                                                                     |              | NW08/16                                                                                                                                                                                    | NW20/32      | NW06/10             | NW20/32       |
| Downstream connection                                                               |              | Vertical rear connections supplied with the device                                                                                                                                         |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
| Distribution                                                                        |              | Linergy LGY, LGYE or BS busbars                                                                                                                                                            |              |                     |               |
|  |              | Selection of busbars: Linergy LGY > page G-4, Linergy LGYE > page G-5, Linergy BS > page G-6.                                                                                              |              |                     |               |
|                                                                                     |              | S1 device                                                                                                                                                                                  |              |                     |               |
| Upstream connection                                                                 |              | Front connections supplied with the device                                                                                                                                                 |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
|                                                                                     |              | S2 device                                                                                                                                                                                  |              |                     |               |
| Downstream connection                                                               |              | Front connections supplied with the device                                                                                                                                                 |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
| Mounting                                                                            |              | Controller outside the device zone                                                                                                                                                         |              |                     |               |
|  |              |                                                                                                         |              |                     |               |
| Devices                                                                             |              | UA or BA controller                                                                                                                                                                        |              |                     |               |
| Number of devices per row                                                           |              | 1                                                                                                                                                                                          |              |                     |               |
| Number of vertical modules                                                          |              | 4                                                                                                                                                                                          |              |                     |               |
| Mounting plates                                                                     |              | LVS03417                                                                                                                                                                                   |              |                     |               |
| Front plates<br>[No. of vertical mod.]                                              | with cut-out | LVS03671 [4]                                                                                                                                                                               |              |                     |               |
| Characteristics                                                                     |              | When a UA, BA or UA150 automatic controller is added together with an ACP mounting plate, the sources can be controlled automatically according to a number of programmed operating modes. |              |                     |               |

(1) Connection to be made according to the busbar drawings supplied by Schneider Electric.

# Manual or remote-operated or automatic source-changeover
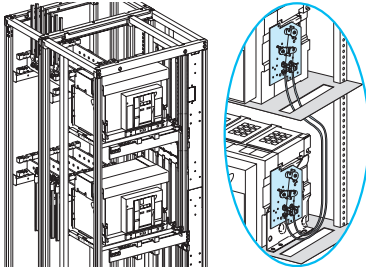
## MasterPact MTZ2 08/32, rear connection S1 device identical to S2 device

## Source-changeover





| Mounting                                                                            |              | Rear connection with cables                                                                                                                                                                |              |                     |               |
|-------------------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|---------------|
|    |              |                                                                                                           |              |                     |               |
| Devices                                                                             |              | Fixed device                                                                                                                                                                               |              | Withdrawable device |               |
| Number of devices per row                                                           |              | 2                                                                                                                                                                                          | 2            | 2                   | 2             |
| Number of vertical modules                                                          |              | 23                                                                                                                                                                                         | 24           | 25                  | 26            |
| Mounting plates                                                                     |              | LVS03500                                                                                                                                                                                   | LVS03500     | LVS03500            | LVS03500      |
|                                                                                     |              | S1 device                                                                                                                                                                                  |              |                     |               |
| Front plates<br>[No. of vertical modules]                                           | upstream     | NW08/16                                                                                                                                                                                    | NW20/32      | NW08/16             | NW20/32       |
|                                                                                     | with cut-out | LVS03711 [9]                                                                                                                                                                               | LVS03711 [9] | LVS03710 [10]       | LVS03710 [10] |
|                                                                                     | downstream   | LVS03805 [5]                                                                                                                                                                               | LVS03806 [6] | LVS03805 [5]        | LVS03806 [6]  |
|                                                                                     |              | S2 device                                                                                                                                                                                  |              |                     |               |
| Front plates<br>[No. of vertical modules]                                           | upstream     | NW08/16                                                                                                                                                                                    | NW20/32      | NW08/16             | NW20/32       |
|                                                                                     | with cut-out | LVS03711 [9]                                                                                                                                                                               | LVS03711 [9] | LVS03710 [10]       | LVS03710 [10] |
|                                                                                     | downstream   | -                                                                                                                                                                                          | -            | -                   | -             |
| Connection                                                                          |              |                                                                                                                                                                                            |              |                     |               |
|  |              |                                                                                                                                                                                            |              |                     |               |
| Devices                                                                             |              | Fixed device                                                                                                                                                                               |              | Withdrawable device |               |
|                                                                                     |              | S1 device                                                                                                                                                                                  |              |                     |               |
|                                                                                     |              | NW08/16                                                                                                                                                                                    | NW20/32      | NW08/16             | NW20/32       |
| Upstream connection                                                                 |              | Vertical rear connections supplied with the device                                                                                                                                         |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
|                                                                                     |              | S2 device                                                                                                                                                                                  |              |                     |               |
|                                                                                     |              | NW08/16                                                                                                                                                                                    | NW20/32      | NW06/10             | NW20/32       |
| Downstream connection                                                               |              | Vertical rear connections supplied with the device                                                                                                                                         |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
| Distribution                                                                        |              | Linergy LGY, LGYE or BS busbars                                                                                                                                                            |              |                     |               |
|  |              | Selection of busbars: Linergy LGY > page G-4, Linergy LGYE > page G-5, Linergy BS > page G-6.                                                                                              |              |                     |               |
|                                                                                     |              | S1 device                                                                                                                                                                                  |              |                     |               |
| Upstream connection                                                                 |              | Front connections supplied with the device                                                                                                                                                 |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
|                                                                                     |              | S2 device                                                                                                                                                                                  |              |                     |               |
| Downstream connection                                                               |              | Front connections supplied with the device                                                                                                                                                 |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
| Mounting                                                                            |              | Controller outside the device zone                                                                                                                                                         |              |                     |               |
|  |              |                                                                                                         |              |                     |               |
| Devices                                                                             |              | UA or BA controller                                                                                                                                                                        |              |                     |               |
| Number of devices per row                                                           |              | 1                                                                                                                                                                                          |              |                     |               |
| Number of vertical modules                                                          |              | 4                                                                                                                                                                                          |              |                     |               |
| Mounting plates                                                                     |              | LVS03417                                                                                                                                                                                   |              |                     |               |
| Front plates<br>[No. of vertical mod.]                                              | with cut-out | LVS03671 [4]                                                                                                                                                                               |              |                     |               |
| Characteristics                                                                     |              | When a UA, BA or UA150 automatic controller is added together with an ACP mounting plate, the sources can be controlled automatically according to a number of programmed operating modes. |              |                     |               |

(1) Connection to be made according to the busbar drawings supplied by Schneider Electric.

# Manual or remote-operated or automatic source-changeover

## MasterPact MTZ2 08/32, front connection S1 device different to S2 device

## Source-changeover





| Mounting                                                                            |              | Front connection with cables                                                                                                                                                               |              |                     |               |
|-------------------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|---------------|
|    |              |                                                                                                           |              |                     |               |
| Devices                                                                             |              | Fixed device                                                                                                                                                                               |              | Withdrawable device |               |
| Number of devices per row                                                           |              | 2                                                                                                                                                                                          | 2            | 2                   | 2             |
| Number of vertical modules                                                          |              | 33                                                                                                                                                                                         | 33           | 35                  | 35            |
| Mounting plates                                                                     |              | LVS03500                                                                                                                                                                                   | LVS03500     | LVS03500            | LVS03500      |
|                                                                                     |              | S1 device                                                                                                                                                                                  |              |                     |               |
| Front plates<br>[No. of vertical<br>modules]                                        | upstream     | NW08/16                                                                                                                                                                                    | NW20/32      | NW08/16             | NW20/32       |
|                                                                                     | with cut-out | LVS03804 [4]                                                                                                                                                                               | LVS03805 [5] | LVS03804 [4]        | LVS03805 [5]  |
|                                                                                     | downstream   | LVS03711 [9]                                                                                                                                                                               | LVS03711 [9] | LVS03710 [10]       | LVS03710 [10] |
|                                                                                     |              | LVS03806 [6]                                                                                                                                                                               | LVS03806 [6] | LVS03806 [6]        | LVS03806 [6]  |
|                                                                                     |              | S2 device                                                                                                                                                                                  |              |                     |               |
| Front plates<br>[No. of vertical<br>modules]                                        | upstream     | NW20/32                                                                                                                                                                                    | NW08/16      | NW20/32             | NW08/16       |
|                                                                                     | with cut-out | -                                                                                                                                                                                          | -            | -                   | -             |
|                                                                                     | downstream   | LVS03711 [9]                                                                                                                                                                               | LVS03711 [9] | LVS03710 [10]       | LVS03710 [10] |
|                                                                                     |              | LVS03805 [5]                                                                                                                                                                               | LVS03804 [4] | LVS03805 [5]        | LVS03804 [4]  |
| Connection                                                                          |              |                                                                                                                                                                                            |              |                     |               |
|  |              |                                                                                                                                                                                            |              |                     |               |
| Devices                                                                             |              | Fixed device                                                                                                                                                                               |              | Withdrawable device |               |
|                                                                                     |              | S1 device                                                                                                                                                                                  |              |                     |               |
|                                                                                     |              | NW08/16                                                                                                                                                                                    | NW20/32      | NW08/16             | NW20/32       |
| Upstream connection                                                                 |              | Vertical rear connections supplied with the device                                                                                                                                         |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
|                                                                                     |              | S2 device                                                                                                                                                                                  |              |                     |               |
|                                                                                     |              | NW08/16                                                                                                                                                                                    | NW20/32      | NWT06/10            | NW20/32       |
| Downstream connection                                                               |              | Vertical rear connections supplied with the device                                                                                                                                         |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
| Distribution                                                                        |              | Linergy LGY, LGYE or BS busbars                                                                                                                                                            |              |                     |               |
|  |              | Selection of busbars: Linergy LGY > page G-4, Linergy LGYE > page G-5, Linergy BS > page G-6.                                                                                              |              |                     |               |
|                                                                                     |              | S1 device                                                                                                                                                                                  |              |                     |               |
| Upstream connection                                                                 |              | Front connections supplied with the device                                                                                                                                                 |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
|                                                                                     |              | S2 device                                                                                                                                                                                  |              |                     |               |
| Downstream connection                                                               |              | Front connections supplied with the device                                                                                                                                                 |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
| Mounting                                                                            |              | Controller outside the device zone                                                                                                                                                         |              |                     |               |
|  |              |                                                                                                         |              |                     |               |
| Devices                                                                             |              | UA or BA controller                                                                                                                                                                        |              |                     |               |
| Number of devices per row                                                           |              | 1                                                                                                                                                                                          |              |                     |               |
| Number of vertical modules                                                          |              | 4                                                                                                                                                                                          |              |                     |               |
| Mounting plates                                                                     |              | LVS03417                                                                                                                                                                                   |              |                     |               |
| Front plates<br>[No. of vertical mod.]                                              |              | LVS03671 [4]                                                                                                                                                                               |              |                     |               |
| Characteristics                                                                     |              | When a UA, BA or UA150 automatic controller is added together with an ACP mounting plate, the sources can be controlled automatically according to a number of programmed operating modes. |              |                     |               |

(1) Connection to be made according to the busbar drawings supplied by Schneider Electric.

# Manual or remote-operated or automatic source-changeover
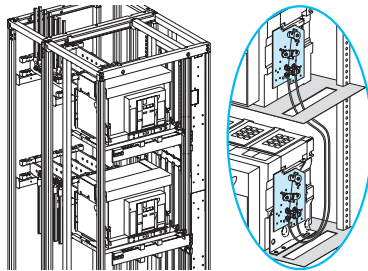
## MasterPacT MTZ2 08/32, rear connection S1 device different to S2 device

## Source-changeover





| Mounting                                                                            |              | Rear connection with cables                                                                                                                                                                |              |                     |               |
|-------------------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|---------------|
|    |              | <br>DD385443.eps                                                                                          |              |                     |               |
| Devices                                                                             |              | Fixed device                                                                                                                                                                               |              | Withdrawable device |               |
| Number of devices per row                                                           |              | 2                                                                                                                                                                                          | 2            | 2                   | 2             |
| Number of vertical modules                                                          |              | 24                                                                                                                                                                                         | 24           | 26                  | 26            |
| Mounting plates                                                                     |              | LVS03500                                                                                                                                                                                   | LVS03500     | LVS03500            | LVS03500      |
|                                                                                     |              | S1 device                                                                                                                                                                                  |              |                     |               |
| Front plates<br>[No. of vertical<br>modules]                                        | upstream     | MTZ2 08/16                                                                                                                                                                                 | MTZ2 20/32   | MTZ2 08/16          | MTZ2 20/32    |
|                                                                                     | with cut-out | LVS03711 [9]                                                                                                                                                                               | LVS03711 [9] | LVS03710 [10]       | LVS03710 [10] |
|                                                                                     | downstream   | LVS03806 [6]                                                                                                                                                                               | LVS03806 [6] | LVS03806 [6]        | LVS03806 [6]  |
|                                                                                     |              | S2 device                                                                                                                                                                                  |              |                     |               |
| Front plates<br>[No. of vertical<br>modules]                                        | upstream     | MTZ2 08/16                                                                                                                                                                                 | MTZ2 20/32   | MTZ2 08/16          | MTZ2 20/32    |
|                                                                                     | with cut-out | LVS03711 [9]                                                                                                                                                                               | LVS03711 [9] | LVS03710 [10]       | LVS03710 [10] |
|                                                                                     | downstream   | -                                                                                                                                                                                          | -            | -                   | -             |
| Connection                                                                          |              |                                                                                                                                                                                            |              |                     |               |
|  |              |                                                                                                                                                                                            |              |                     |               |
| Devices                                                                             |              | Fixed device                                                                                                                                                                               |              | Withdrawable device |               |
|                                                                                     |              | S1 device                                                                                                                                                                                  |              |                     |               |
|                                                                                     |              | MTZ2 08/16                                                                                                                                                                                 | MTZ2 20/32   | MTZ2 08/16          | MTZ2 20/32    |
| Upstream connection                                                                 |              | Vertical rear connections supplied with the device                                                                                                                                         |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
|                                                                                     |              | S2 device                                                                                                                                                                                  |              |                     |               |
|                                                                                     |              | MTZ2 08/16                                                                                                                                                                                 | MTZ2 20/32   | MTZ2 06/10          | MTZ2 20/32    |
| Downstream connection                                                               |              | Vertical rear connections supplied with the device                                                                                                                                         |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
| Distribution                                                                        |              | Linergy LGY, LGYE or BS busbars                                                                                                                                                            |              |                     |               |
|  |              | Selection of busbars: Linergy LGY > page G-4, Linergy LGYE > page G-5, Linergy BS > page G-6.                                                                                              |              |                     |               |
|                                                                                     |              | S1 device                                                                                                                                                                                  |              |                     |               |
| Upstream connection                                                                 |              | Front connections supplied with the device                                                                                                                                                 |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
|                                                                                     |              | S2 device                                                                                                                                                                                  |              |                     |               |
| Downstream connection                                                               |              | Front connections supplied with the device                                                                                                                                                 |              |                     |               |
| Connection                                                                          |              | must be made (1)                                                                                                                                                                           |              |                     |               |
| Mounting                                                                            |              | Controller outside the device zone                                                                                                                                                         |              |                     |               |
|  |              | <br>DD383813.eps                                                                                        |              |                     |               |
| Devices                                                                             |              | UA or BA controller                                                                                                                                                                        |              |                     |               |
| Number of devices per row                                                           |              | 1                                                                                                                                                                                          |              |                     |               |
| Number of vertical modules                                                          |              | 4                                                                                                                                                                                          |              |                     |               |
| Mounting plates                                                                     |              | LVS03417                                                                                                                                                                                   |              |                     |               |
| Front plates<br>[No. of vertical mod.]                                              | with cut-out | LVS03671 [4]                                                                                                                                                                               |              |                     |               |
| Characteristics                                                                     |              | When a UA, BA or UA150 automatic controller is added together with an ACP mounting plate, the sources can be controlled automatically according to a number of programmed operating modes. |              |                     |               |

(1) Connection to be made according to the busbar drawings supplied by Schneider Electric.

## Manual or remote-operated or automatic source-changeover

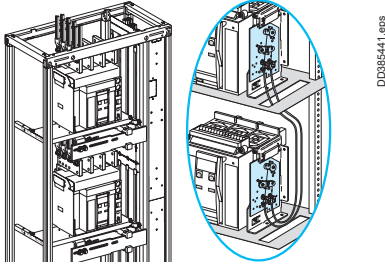MasterPacT MTZ1 06/16, front connection S1 device identical to S2 device

## Source-changeover





| Mounting                                                                            |              | Front connection with cables                                                                                                                                                               |              |                     |              |
|-------------------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|--------------|
|    |              |                                                                                                           |              |                     |              |
| Devices                                                                             |              | Fixed device                                                                                                                                                                               |              | Withdrawable device |              |
| Number of devices per row                                                           |              | 2                                                                                                                                                                                          | 2            | 2                   | 2            |
| Number of vertical modules                                                          |              | 24                                                                                                                                                                                         | 28           | 26                  | 30           |
| Mounting plates                                                                     |              | LVS03484                                                                                                                                                                                   | LVS03484     | LVS03483            | LVS03483     |
|                                                                                     |              | S1 device                                                                                                                                                                                  |              |                     |              |
|                                                                                     |              | MTZ1 06/10                                                                                                                                                                                 | MTZ1 12/16   | MTZ1 06/10          | MTZ1 12/16   |
| Front plates<br>[No. of vertical modules]                                           | upstream     | LVS03802 [2]                                                                                                                                                                               | LVS03804 [4] | LVS03802 [2]        | LVS03804 [4] |
|                                                                                     | with cut-out | LVS03692 [7]                                                                                                                                                                               | LVS03692 [7] | LVS03691 [8]        | LVS03691 [8] |
|                                                                                     | downstream   | LVS03803 [3]                                                                                                                                                                               | LVS03803 [3] | LVS03803 [3]        | LVS03803 [3] |
|                                                                                     |              | S2 device                                                                                                                                                                                  |              |                     |              |
|                                                                                     |              | MTZ1 06/10                                                                                                                                                                                 | MTZ1 12/16   | MTZ1 06/10          | MTZ1 12/16   |
| Front plates<br>[No. of vertical modules]                                           | upstream     | LVS03803 [3]                                                                                                                                                                               | LVS03803 [3] | LVS03803 [3]        | LVS03803 [3] |
|                                                                                     | with cut-out | LVS03692 [7]                                                                                                                                                                               | LVS03692 [7] | LVS03691 [8]        | LVS03691 [8] |
|                                                                                     | downstream   | LVS03802 [2]                                                                                                                                                                               | LVS03804 [4] | LVS03802 [2]        | LVS03804 [4] |
| Connection                                                                          |              |                                                                                                                                                                                            |              |                     |              |
|  |              |                                                                                                                                                                                            |              |                     |              |
| Devices                                                                             |              | Fixed device                                                                                                                                                                               |              | Withdrawable device |              |
|                                                                                     |              | MTZ1 06/10                                                                                                                                                                                 | MTZ1 12/16   | MTZ1 06/10          | MTZ1 12/16   |
|                                                                                     |              | 3P                                                                                                                                                                                         | 4P           | 3P                  | 4P           |
|                                                                                     |              | 3P                                                                                                                                                                                         | 4P           | 3P                  | 4P           |
| <b>S1 device</b>                                                                    |              |                                                                                                                                                                                            |              |                     |              |
| Upstream connection                                                                 |              | Front connections supplied with the device                                                                                                                                                 |              |                     |              |
| Vertical connection adapters                                                        |              | 33642                                                                                                                                                                                      | 33643        | 33642               | 33643        |
|                                                                                     |              | 33642                                                                                                                                                                                      | 33643        | 33642               | 33643        |
| <b>S2 device</b>                                                                    |              |                                                                                                                                                                                            |              |                     |              |
| Downstream connection                                                               |              | Front connections supplied with the device                                                                                                                                                 |              |                     |              |
| Vertical connection adapters                                                        |              | 33642                                                                                                                                                                                      | 33643        | 33642               | 33643        |
|                                                                                     |              | 33642                                                                                                                                                                                      | 33643        | 33642               | 33643        |
| Distribution                                                                        |              | Linergy LGY, LGYE or BS busbars                                                                                                                                                            |              |                     |              |
|  |              | Selection of busbars: Linergy LGY > page G-4, Linergy LGYE > page G-5, Linergy BS > page G-6.                                                                                              |              |                     |              |
| <b>S1 device</b>                                                                    |              |                                                                                                                                                                                            |              |                     |              |
| Upstream connection                                                                 |              | Front connections supplied with the device                                                                                                                                                 |              |                     |              |
| Connection                                                                          |              | must be made                                                                                                                                                                               |              |                     |              |
| <b>S2 device</b>                                                                    |              |                                                                                                                                                                                            |              |                     |              |
| Downstream connection                                                               |              | Front connections supplied with the device                                                                                                                                                 |              |                     |              |
| Connection                                                                          |              | must be made                                                                                                                                                                               |              |                     |              |
| Mounting                                                                            |              | Outside the device zone                                                                                                                                                                    |              |                     |              |
|  |              |                                                                                                         |              |                     |              |
| Devices                                                                             |              | UA or BA controller                                                                                                                                                                        |              |                     |              |
| Number of devices per row                                                           |              | 1                                                                                                                                                                                          |              |                     |              |
| Number of vertical modules                                                          |              | 4                                                                                                                                                                                          |              |                     |              |
| Mounting plates                                                                     |              | LVS03417                                                                                                                                                                                   |              |                     |              |
| Front plates<br>[No. of vertical mod.]                                              | with cut-out | LVS03671 [4]                                                                                                                                                                               |              |                     |              |
| Characteristics                                                                     |              | When a UA, BA or UA150 automatic controller is added together with an ACP mounting plate, the sources can be controlled automatically according to a number of programmed operating modes. |              |                     |              |



# Manual or remote-operated or automatic source-changeover

## MasterPacT MTZ1 6/16, rear connection S1 device identical to S2 device





## Source-changeover

| Mounting                                                                            |              | Rear connection with cables                                                                                                                                                                |                     |
|-------------------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|    |              |                                                                                                           |                     |
| Devices                                                                             |              | Fixed device                                                                                                                                                                               | Withdrawable device |
| Number of devices per row                                                           |              | 2                                                                                                                                                                                          | 2                   |
| Number of vertical modules                                                          |              | 22                                                                                                                                                                                         | 22                  |
| Mounting plates                                                                     |              | LVS03484                                                                                                                                                                                   | LVS03483            |
|                                                                                     |              | S1 device                                                                                                                                                                                  |                     |
|                                                                                     |              | MTZ1 06/16                                                                                                                                                                                 | MTZ1 06/16          |
| Front plates<br>[No. of vertical modules]                                           | upstream     | LVS03801 [1]                                                                                                                                                                               | -                   |
|                                                                                     | with cut-out | LVS03692 [7]                                                                                                                                                                               | LVS03691 [8]        |
|                                                                                     | downstream   | LVS03803 [3]                                                                                                                                                                               | LVS03803 [3]        |
|                                                                                     |              | S2 device                                                                                                                                                                                  |                     |
|                                                                                     |              | MTZ1 06/16                                                                                                                                                                                 | MTZ1 06/16          |
| Front plates<br>[No. of vertical modules]                                           | upstream     | LVS03803 [3]                                                                                                                                                                               | LVS03803 [3]        |
|                                                                                     | with cut-out | LVS03692 [7]                                                                                                                                                                               | LVS03691 [8]        |
|                                                                                     | downstream   | LVS03801 [1]                                                                                                                                                                               | -                   |
| Connection                                                                          |              |                                                                                                                                                                                            |                     |
|   |              |                                                                                                                                                                                            |                     |
| Devices                                                                             |              | Fixed device                                                                                                                                                                               | Withdrawable device |
|                                                                                     |              | MTZ1 06/16                                                                                                                                                                                 | MTZ1 06/16          |
|                                                                                     |              | S1 device                                                                                                                                                                                  |                     |
| Upstream connection                                                                 |              | Vertical rear connections supplied with the device                                                                                                                                         |                     |
| Connection                                                                          |              | must be made                                                                                                                                                                               |                     |
|                                                                                     |              | S2 device                                                                                                                                                                                  |                     |
| Downstream connection                                                               |              | Vertical rear connections supplied with the device                                                                                                                                         |                     |
| Connection                                                                          |              | must be made                                                                                                                                                                               |                     |
| Distribution                                                                        |              | Linergy LGY, LGYE or BS busbars                                                                                                                                                            |                     |
|  |              | Selection of busbars: Linergy LGY > page G-4, Linergy LGYE > page G-5, Linergy BS > page G-6.                                                                                              |                     |
|                                                                                     |              | S1 device                                                                                                                                                                                  |                     |
| Upstream connection                                                                 |              | Front connections supplied with the device                                                                                                                                                 |                     |
| Connection                                                                          |              | must be made                                                                                                                                                                               |                     |
|                                                                                     |              | S2 device                                                                                                                                                                                  |                     |
| Downstream connection                                                               |              | Front connections supplied with the device                                                                                                                                                 |                     |
| Connection                                                                          |              | must be made                                                                                                                                                                               |                     |
| Mounting                                                                            |              | Controller outside the device zone                                                                                                                                                         |                     |
|  |              |                                                                                                         |                     |
| Devices                                                                             |              | UA or BA controller                                                                                                                                                                        |                     |
| Number of devices per row                                                           |              | 1                                                                                                                                                                                          |                     |
| Number of vertical modules                                                          |              | 4                                                                                                                                                                                          |                     |
| Mounting plates                                                                     |              | LVS03417                                                                                                                                                                                   |                     |
| Front plates with cut-out<br>[No. of vertical mod.]                                 |              | LVS03671 [4]                                                                                                                                                                               |                     |
| Characteristics                                                                     |              | When a UA, BA or UA150 automatic controller is added together with an ACP mounting plate, the sources can be controlled automatically according to a number of programmed operating modes. |                     |

## Manual or remote-operated or automatic source-changeover

MasterPacT MTZ1 06/16, front connection S1 device different to S2 device



## Source-changeover

| Mounting                                                                            |              | Front connection with cables                                                                                                                                                               |              |                     |              |
|-------------------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|--------------|
|    |              |                                                                                                           |              |                     |              |
| Devices                                                                             |              | Fixed device                                                                                                                                                                               |              | Withdrawable device |              |
| Number of devices per row                                                           |              | 2                                                                                                                                                                                          | 2            | 2                   | 2            |
| Number of vertical modules                                                          |              | 26                                                                                                                                                                                         | 26           | 28                  | 28           |
| Mounting plates                                                                     |              | LVS03484                                                                                                                                                                                   | LVS03484     | LVS03483            | LVS03483     |
|                                                                                     |              | S1 device                                                                                                                                                                                  |              |                     |              |
|                                                                                     |              | MTZ1 12/16                                                                                                                                                                                 | MTZ1 06/10   | MTZ1 12/16          | MTZ1 06/10   |
| Front plates<br>[No. of vertical<br>modules]                                        | upstream     | LVS03804 [4]                                                                                                                                                                               | LVS03802 [2] | LVS03804 [4]        | LVS03802 [2] |
|                                                                                     | with cut-out | LVS03692 [7]                                                                                                                                                                               | LVS03692 [7] | LVS03691 [8]        | LVS03691 [8] |
|                                                                                     | downstream   | LVS03803 [3]                                                                                                                                                                               | LVS03803 [3] | LVS03803 [3]        | LVS03803 [3] |
|                                                                                     |              | S2 device                                                                                                                                                                                  |              |                     |              |
|                                                                                     |              | MTZ1 06/10                                                                                                                                                                                 | MTZ1 12/16   | MTZ1 06/10          | MTZ1 12/16   |
| Front plates<br>[No. of vertical<br>modules]                                        | upstream     | LVS03803 [3]                                                                                                                                                                               | LVS03803 [3] | LVS03803 [3]        | LVS03803 [3] |
|                                                                                     | with cut-out | LVS03692 [7]                                                                                                                                                                               | LVS03692 [7] | LVS03691 [8]        | LVS03691 [8] |
|                                                                                     | downstream   | LVS03802 [2]                                                                                                                                                                               | LVS03804 [4] | LVS03802 [2]        | LVS03804 [4] |
| Connection                                                                          |              |                                                                                                                                                                                            |              |                     |              |
|  |              |                                                                                                                                                                                            |              |                     |              |
| Devices                                                                             |              | Fixed device                                                                                                                                                                               |              | Withdrawable device |              |
|                                                                                     |              | MTZ1 06/10                                                                                                                                                                                 | MTZ1 12/16   | MTZ1 06/10          | MTZ1 12/16   |
|                                                                                     |              | 3P                                                                                                                                                                                         | 4P           | 3P                  | 4P           |
| S1 device                                                                           |              |                                                                                                                                                                                            |              |                     |              |
| Upstream connection                                                                 |              | Front connections supplied with the device                                                                                                                                                 |              |                     |              |
| Vertical connection adapters                                                        |              | 33642                                                                                                                                                                                      | 33643        | 33642               | 33643        |
| S2 device                                                                           |              |                                                                                                                                                                                            |              |                     |              |
| Downstream connection                                                               |              | Front connections supplied with the device                                                                                                                                                 |              |                     |              |
| Vertical connection adapters                                                        |              | 33642                                                                                                                                                                                      | 33643        | 33642               | 33643        |
| Distribution                                                                        |              | Linergy LGY, LGYE or BS busbars                                                                                                                                                            |              |                     |              |
|  |              | Selection of busbars: Linergy LGY > page G-4, Linergy LGYE > page G-5, Linergy BS > page G-6.                                                                                              |              |                     |              |
| S1 device                                                                           |              |                                                                                                                                                                                            |              |                     |              |
| Upstream connection                                                                 |              | Front connections supplied with the device                                                                                                                                                 |              |                     |              |
| Connection                                                                          |              | must be made                                                                                                                                                                               |              |                     |              |
| S2 device                                                                           |              |                                                                                                                                                                                            |              |                     |              |
| Downstream connection                                                               |              | Front connections supplied with the device                                                                                                                                                 |              |                     |              |
| Connection                                                                          |              | must be made                                                                                                                                                                               |              |                     |              |
| Mounting                                                                            |              | Controller outside the device zone                                                                                                                                                         |              |                     |              |
|  |              |                                                                                                         |              |                     |              |
| Devices                                                                             |              | UA or BA controller                                                                                                                                                                        |              |                     |              |
| Number of devices per row                                                           |              | 1                                                                                                                                                                                          |              |                     |              |
| Number of vertical modules                                                          |              | 4                                                                                                                                                                                          |              |                     |              |
| Mounting plates                                                                     |              | LVS03417                                                                                                                                                                                   |              |                     |              |
| Front plates<br>[No. of vertical mod.]                                              | with cut-out | LVS03671 [4]                                                                                                                                                                               |              |                     |              |
| Characteristics                                                                     |              | When a UA, BA or UA150 automatic controller is added together with an ACP mounting plate, the sources can be controlled automatically according to a number of programmed operating modes. |              |                     |              |

## Manual or remote-operated or automatic source-changeover

ComPacT NS630b to 1000

## Source-changeover




| Mounting                                                                            |                       | Horizontal                                                                                             |           |
|-------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------|-----------|
|    |                       |                       |           |
| Devices                                                                             |                       | NS630b/1000                                                                                            |           |
|                                                                                     |                       | 3P                                                                                                     | 4P        |
| Number of devices per row                                                           |                       | 2                                                                                                      |           |
| Number of vertical modules                                                          |                       | 13                                                                                                     |           |
| Mounting plates                                                                     |                       | LVS03491                                                                                               |           |
| Front plates<br>[No. of vertical modules]                                           | upstream              | -                                                                                                      |           |
|                                                                                     | with cut-out          | LVS03695 [13]                                                                                          |           |
|                                                                                     | downstream            | -                                                                                                      |           |
| Mechanical interlock                                                                |                       | 33890                                                                                                  | 33890     |
| Characteristics                                                                     |                       | <b>Interlocking of direct rotary handles.</b><br>The devices are equipped with a direct rotary handle. |           |
| Connection                                                                          |                       | Downstream distribution                                                                                |           |
|  |                       |                                                                                                        |           |
| Type of connected devices                                                           |                       | ComPacT NS630b/1000                                                                                    |           |
|                                                                                     |                       | 3P                                                                                                     | 4P        |
| Front connection                                                                    | long terminal shields | 33628 x 2                                                                                              | 33629 x 2 |

E

## Manual source-changeover

ComPacT NSX100/630




## Source-changeover

| Mounting                                                                           |                        | Vertical                                                                                                                            |          | Horizontal                                                                         |          |
|------------------------------------------------------------------------------------|------------------------|-------------------------------------------------------------------------------------------------------------------------------------|----------|------------------------------------------------------------------------------------|----------|
|   |                        |                                                    |          |  |          |
| Devices                                                                            |                        | NSX100/250                                                                                                                          |          | NSX400/630                                                                         |          |
|                                                                                    |                        | 3P                                                                                                                                  | 4P       | 3P                                                                                 | 4P       |
| Number of devices per row                                                          |                        | 2                                                                                                                                   |          | 2                                                                                  |          |
| Number of vertical modules                                                         |                        | 10                                                                                                                                  |          | 10                                                                                 |          |
| Mounting plates                                                                    |                        | LVS03428                                                                                                                            |          | LVS03458                                                                           |          |
| Front plates<br>[No. of vertical<br>modules]                                       | upstream               | LVS03802 [2]                                                                                                                        |          | -                                                                                  |          |
|                                                                                    | with cut-out           | LVS03245 [5]                                                                                                                        |          | LVS03659 [10]                                                                      |          |
|                                                                                    | downstream             | LVS03803 [3]                                                                                                                        |          | -                                                                                  |          |
| Mechanical interlock                                                               |                        | LV429369                                                                                                                            | LV429369 | LV432621                                                                           | LV432621 |
| Characteristics                                                                    |                        | Interlocking of rotary handles<br>The devices are equipped with a rotary handle.<br>They are mounted on a dedicated mounting plate. |          |                                                                                    |          |
| Connection                                                                         |                        | Downstream distribution                                                                                                             |          |                                                                                    |          |
|  |                        |                                                                                                                                     |          |                                                                                    |          |
| Type of connected devices                                                          |                        | ComPacT NSX100/250                                                                                                                  |          | ComPacT NSX400/630                                                                 |          |
|                                                                                    |                        | 3P                                                                                                                                  | 4P       | 3P                                                                                 | 4P       |
| Front conn.                                                                        | long terminal shields  | LV429517                                                                                                                            | LV429518 | LV432593                                                                           | LV432594 |
|                                                                                    | for spreader           | -                                                                                                                                   | -        | LV432595                                                                           | LV432596 |
| Coupling accessory                                                                 |                        | LV429358                                                                                                                            | LV429359 | LV432619                                                                           | LV432620 |
| Rear conn.                                                                         | short terminal shields | LV429515                                                                                                                            | LV429516 | LV432591                                                                           | LV432592 |



## Remote-operated source-changeover

## ComPacT NSX100/630

## Source-changeover

| Mounting                                                                          |  | Horizontal                                                                        |                                                                                    |
|-----------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|  |  |  |  |
| <b>Devices</b>                                                                    |  | <b>NSX100/250</b>                                                                 | <b>NSX400/630</b>                                                                  |
| Number of devices per row                                                         |  | 2                                                                                 | 2                                                                                  |
| Number of vertical modules                                                        |  | 8                                                                                 | 10                                                                                 |
| Mounting plates                                                                   |  | LVS03417 (1)                                                                      | LVS03457 (2)                                                                       |
| Front plates<br>[No. of vertical mod.] with cut-out                               |  | LVS03616 [8]                                                                      | LVS03656 [10]                                                                      |
| Characteristics                                                                   |  | The devices are equipped with motor mechanisms.                                   |                                                                                    |

| Connection                                                                        |  | Downstream distribution          |          |                           |           |
|-----------------------------------------------------------------------------------|--|----------------------------------|----------|---------------------------|-----------|
|  |  | <b>Type of connected devices</b> |          | <b>ComPacT NSX100/250</b> |           |
|                                                                                   |  |                                  |          | <b>3P</b>                 | <b>4P</b> |
| Front connection                                                                  |  | long terminal shields            | LV429517 | LV429518                  | LV432593  |
|                                                                                   |  | for spreader                     | -        | -                         | LV432595  |
| Coupling accessory                                                                |  | LV429358                         | LV429359 | LV432619                  | LV432596  |
| Rear connection                                                                   |  | short terminal shields           | LV429515 | LV429516                  | LV432591  |
|                                                                                   |  |                                  |          |                           | LV432592  |

| Mounting                                                                            |  | Controller                                                                                                                                                                                 |  |
|-------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  |  |                                                                                                         |  |
| <b>Devices</b>                                                                      |  | <b>UA or BA controller</b>                                                                                                                                                                 |  |
| Number of devices per row                                                           |  | 1                                                                                                                                                                                          |  |
| Number of vertical modules                                                          |  | 4                                                                                                                                                                                          |  |
| Mounting plates                                                                     |  | LVS03417                                                                                                                                                                                   |  |
| Front plates<br>[No. of vertical mod.] with cut-out                                 |  | LVS03671 [4]                                                                                                                                                                               |  |
| Characteristics                                                                     |  | When a UA, BA or UA150 automatic controller is added together with an ACP mounting plate, the sources can be controlled automatically according to a number of programmed operating modes. |  |

(1) Order mounting plate + IVE electrical interlocking unit for NSX100/250 (cat. no. LV29350 for AC or LV29351 for DC version).

(2) Order mounting plate + IVE electrical interlocking unit for NSX400/630 (cat. no. LV32610 for AC or LV32611 for DC version).

Incoming and busbar connections to be made.






## Manual source-changeover

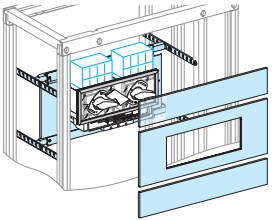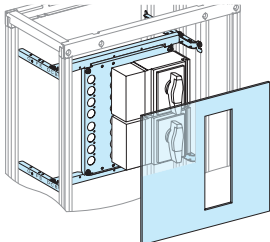ComPacT INS-INV250 to 630

Front direct rotary handle

Source-changeover

| Mounting                                                                          |              | Front vertical rotary handle                                                      | Front horizontal rotary handle                                                     |
|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|  |              |  |  |
| Devices                                                                           |              | Mechanical interlocking                                                           |                                                                                    |
|                                                                                   |              | INS-INV250                                                                        | INS-INV320/630                                                                     |
| Number of devices per row                                                         |              | 2                                                                                 | 2                                                                                  |
| Number of vertical modules                                                        |              | 9                                                                                 | 10                                                                                 |
| Mounting plates                                                                   |              | LVS03428                                                                          | LVS03458                                                                           |
| Front plates<br>[No. of vertical<br>modules]                                      | upstream     | LVS03802 [2]                                                                      | -                                                                                  |
|                                                                                   | with cut-out | LVS03235 [5]                                                                      | LVS03659 [10]                                                                      |
|                                                                                   | downstream   | LVS03802 [2]                                                                      | -                                                                                  |
| Mechanical interlock                                                              |              | 31073                                                                             | 31074                                                                              |

## Distribution




|  |                             |                    |              |                        |              |
|------------------------------------------------------------------------------------|-----------------------------|--------------------|--------------|------------------------|--------------|
| Type of connected devices                                                          |                             | ComPacT INS-INV250 |              | ComPacT INS-INV320/630 |              |
|                                                                                    |                             | 3P                 | 4P           | 3P                     | 4P           |
| Front conn.                                                                        | long terminal shields       | 2 x LV429518       | 2 x LV429518 | -                      |              |
|                                                                                    | long terminal shields 45 mm | -                  |              | 2 x LV432594           | 2 x LV432594 |
| Coupling accessory                                                                 |                             | LV429359           | LV429359     | LV432620               | LV432620     |

## Manual source-changeover

ComPacT INS-INV250 to 630

Complete assembly device



Source-changeover





| Mounting                                                                          |              | Vertical complete assembly                                                        |  | Horizontal complete assembly                                                       |  |
|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------|--|
|  |              |  |  |  |  |
| Devices                                                                           |              | Complete source-changeover assembly                                               |  | INS-INV320/630                                                                     |  |
|                                                                                   |              | INS-INV250                                                                        |  |                                                                                    |  |
| Number of devices per row                                                         |              | 1                                                                                 |  | 1                                                                                  |  |
| Number of vertical modules                                                        |              | 9                                                                                 |  | 10                                                                                 |  |
| Mounting plates                                                                   |              | LVS03428                                                                          |  | LVS03458                                                                           |  |
| Front plates<br>[No. of vertical modules]                                         | upstream     | LVS03802 [2]                                                                      |  | -                                                                                  |  |
|                                                                                   | with cut-out | LVS03247 [5]                                                                      |  | LVS03661 [10]                                                                      |  |
|                                                                                   | downstream   | LVS03802 [2]                                                                      |  | -                                                                                  |  |



| Distribution                                                                      |                             |                    |              |                        |              |
|-----------------------------------------------------------------------------------|-----------------------------|--------------------|--------------|------------------------|--------------|
|  |                             |                    |              |                        |              |
| Type of connected devices                                                         |                             | ComPacT INS-INV250 |              | ComPacT INS-INV320/630 |              |
|                                                                                   |                             | 3P                 | 4P           | 3P                     | 4P           |
| Front conn.                                                                       | long terminal shields       | 2 x LV429518       | 2 x LV429518 | -                      |              |
|                                                                                   | long terminal shields 45 mm | -                  |              | 2 x LV432594           | 2 x LV432594 |
| Coupling accessory                                                                |                             | LV429359           | LV429359     | LV432620               | LV432620     |
| Complete source-changeover assembly                                               | 100 A                       | 31140              | 31141        |                        |              |
|                                                                                   | 160 A                       | 31144              | 31145        |                        |              |
|                                                                                   | 200 A                       | 31142              | 31143        |                        |              |
|                                                                                   | 250 A                       | 31146              | 31147        |                        |              |
|                                                                                   | 320 A                       |                    |              | 31148                  | 31149        |
|                                                                                   | 400 A                       |                    |              | 31150                  | 31151        |
|                                                                                   | 500 A                       |                    |              | 31152                  | 31153        |
| 630 A                                                                             |                             |                    | 31154        | 31155                  |              |

Transfer**PacT** 32A-100A Automatic source changeover system  
W650/800

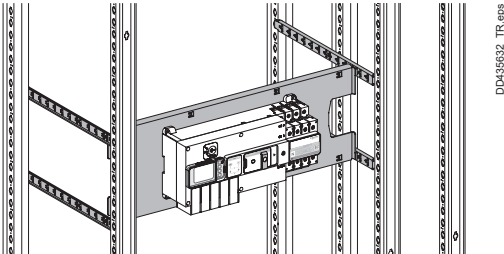Changeover system

| Mounting                                                                         | Vertical Fixed                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|  |  |
| Devices                                                                          | TransferPacT Automatic / Active Automatic 32A-100A2P/3P/4P                        |
| No. of devices per row                                                           | 1                                                                                 |
| No. of vertical modules                                                          | 6M                                                                                |
| Mounting plate                                                                   | LVS03424                                                                          |
| Front plate with cut-out                                                         | LVS03206                                                                          |


| Upstream / Downstream Connections |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cable                             | <div><div><div><div>mm<br/>in.</div><div></div></div><div><div></div><div><div></div></div></div><div></div></div></div> |
| Long terminal shields             | <div></div> <div>TPSISO30</div>                                                                                                                                                                                                                                                                                                                                                    |





| Auxiliary                 |                                                                                                                                                                                                                                                           |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Coupling auxiliary module | <div><div></div><div>TPSAUX32</div></div> <div><div></div><div>TPSAUX33</div></div> |



# TransferPacT 80A-160A Automatic source changeover system
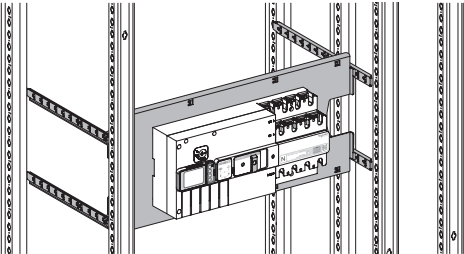
## W650/800

Changeover system

| Mounting                                   |  | Vertical Fixed                                                                                                         |  |
|--------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------|--|
| <div><div>650</div><div>650150</div></div> |  | <div><div>DD435633_TR.eps</div></div> |  |
| Devices                                    |  | TransferPacT Automatic / Active Automatic 80A-160A3P/4P                                                                |  |
| No. of devices per row                     |  | 1                                                                                                                      |  |
| No. of vertical modules                    |  | 8M                                                                                                                     |  |
| Mounting plate                             |  | LVS03425                                                                                                               |  |
| Front plate with cut-out                   |  | LVS03207                                                                                                               |  |
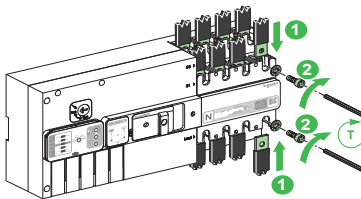
| Upstream / Downstream Connections |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                  |    |     |   |      |        |   |      |        |   |     |        |   |     |        |   |        |                  |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|----|-----|---|------|--------|---|------|--------|---|-----|--------|---|-----|--------|---|--------|------------------|
| Cable/Busbars                     | <div><div><div><table><thead><tr><th></th><th>mm</th><th>in.</th></tr></thead><tbody><tr><td>A</td><td>≤ 20</td><td>≤ 0.78</td></tr><tr><td>B</td><td>≤ 10</td><td>≤ 0.39</td></tr><tr><td>C</td><td>≤ 8</td><td>≤ 0.24</td></tr><tr><td>Ø</td><td>≥ 8</td><td>≥ 0.31</td></tr><tr><td>T</td><td>8±0.31</td><td>70.8±7.08 lb-in.</td></tr></tbody></table><div> M8</div><div> 6</div></div></div><div></div><div></div></div> |                  | mm | in. | A | ≤ 20 | ≤ 0.78 | B | ≤ 10 | ≤ 0.39 | C | ≤ 8 | ≤ 0.24 | Ø | ≥ 8 | ≥ 0.31 | T | 8±0.31 | 70.8±7.08 lb-in. |
|                                   | mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | in.              |    |     |   |      |        |   |      |        |   |     |        |   |     |        |   |        |                  |
| A                                 | ≤ 20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | ≤ 0.78           |    |     |   |      |        |   |      |        |   |     |        |   |     |        |   |        |                  |
| B                                 | ≤ 10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | ≤ 0.39           |    |     |   |      |        |   |      |        |   |     |        |   |     |        |   |        |                  |
| C                                 | ≤ 8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | ≤ 0.24           |    |     |   |      |        |   |      |        |   |     |        |   |     |        |   |        |                  |
| Ø                                 | ≥ 8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | ≥ 0.31           |    |     |   |      |        |   |      |        |   |     |        |   |     |        |   |        |                  |
| T                                 | 8±0.31                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 70.8±7.08 lb-in. |    |     |   |      |        |   |      |        |   |     |        |   |     |        |   |        |                  |
| Long terminal shields             | <div><div><div>TPSISO31</div></div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                  |    |     |   |      |        |   |      |        |   |     |        |   |     |        |   |        |                  |





| Auxiliary                 |                                                                                                                                                                                                                                                          |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Coupling auxiliary module | <div><div><div><div>TPSAUX32</div></div><div><div>TPSAUX33</div></div></div></div> |

## Fupact ISFL

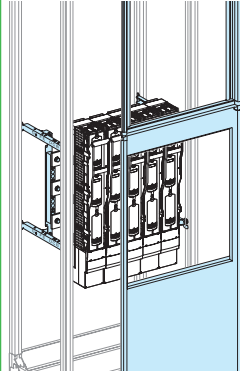Vertical / 3P

Determining the busbars

Fusegear

| Mounting                                                                          | Through cut-out front plate                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Through a 2/3 cut-out front plate                                                 |                        |                      | Accessories                                                                         |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------|----------------------|-------------------------------------------------------------------------------------|
|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |                        |                      |  |
| <b>Devices</b>                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                   |                        |                      |                                                                                     |
|                                                                                   | <b>ISFL160</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <b>ISFL160</b>                                                                    | <b>ISFL250/400/630</b> | <b>ISFL 1250</b>     |                                                                                     |
| Number of devices per row                                                         | 9                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 10                                                                                | 5                      | 2                    | -                                                                                   |
| Number of vertical modules                                                        | 11                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 24                                                                                | 24                     | 24                   | -                                                                                   |
| Mounting plates                                                                   | LVS03545 + (1)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | LVS03546 + (1)                                                                    | LVS03546 (1) + (2)     | LVS03546 + (2)       | -                                                                                   |
| Length adapter                                                                    | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | + 5 x LV480870 (2)                                                                | -                      | -                    | -                                                                                   |
| Conversion kit for direct conn.                                                   | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | + 5 x LV480854 (2)                                                                | -                      | -                    | -                                                                                   |
| Front plates with cut-out<br>[No. of vertical mod.]                               | LVS03736 [11]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | -                                                                                 | -                      | -                    | -                                                                                   |
| FAV 2/3                                                                           | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | LVS03735 [24 + 12]                                                                | LVS03735 [24 + 12]     | LVS03735 [24 + 12]   | -                                                                                   |
| Side frame door cut-out                                                           | LV480868<br>LV480869                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | LV480868<br>LV480869                                                              | LV480868<br>LV480869   | LV480868<br>LV480869 | -                                                                                   |
| Blanking plate                                                                    | LVS03740                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | LVS03740                                                                          | LVS03741 (3)           | 2 x LVS03741         | -                                                                                   |
| Busbars cover                                                                     | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | -                                                                                 | -                      | -                    | LVS04860                                                                            |
| Characteristics                                                                   | <div><div><div>■ The fuses are installed on the horizontal bars which are in turn supported by a mounting plate</div><div>■ The front plates are secured to the hinged front plate support frame.</div><div>■ The front may be covered either by a cover frame or a plain or transparent door.</div><div>■ Current transformers can be installed behind ISFL fuse-switch-disconnectors.</div></div><div><div>■ The fuses are installed on the horizontal bars which are in turn supported by a mounting plate</div><div>■ The front of the cubicle is made up of two parts:<div><div>□ 2/3 cut-out front plate allowing introduction of the fuses</div><div>□ 1/3 front plate support frame (12 modules) cat. number LVS08562 on which the functional units are mounted</div></div></div><div>■ The front may be covered either by a cover frame or a plain or transparent door.</div><div>■ Current transformers can be installed behind ISFL fuse-switch-disconnectors.</div></div></div> |                                                                                   |                        |                      |                                                                                     |

| Connection                                                                          | Direct                                                                    |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
|  |                                                                           |
| <b>Devices</b>                                                                      | <b>ISFL160/630</b>                                                        |
| Connection                                                                          | By cables or directly on the busbars with clamp fixing or pressure fixing |

| Distribution                                                                        |                    |
|-------------------------------------------------------------------------------------|--------------------|
|  |                    |
| <b>Devices</b>                                                                      | <b>ISFL160/630</b> |
| Downstream connection                                                               | With cable         |

(1) The bars are made by the customer: for choice of bars &gt; pages G-2 to G-13.

(2) Adaptation accessories LV480870 + LV480855 used to:

- install two ISFL160 devices on a mounting plate LVS03546
- mix ISFL devices.

(3) Use 2 blanking plates per device.

**Note:**

- for ISFL160, by fixing screws only.
- for determining the busbar > page I-60.


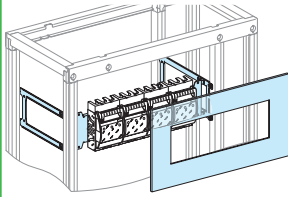
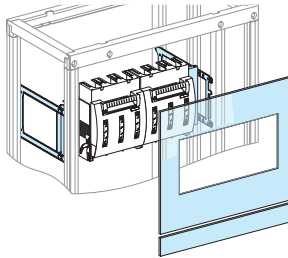
## Fupact ISFT

Vertical / 3P

Installation on mounting plate or busbars

Determining the busbars

Fusegear/Switch-disconnector

| Mounting                                                                          | On base plate                                                                     |                                                                                    | On busbars |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------|
|  |  |  |            |

| Devices                                   | ISFT100                    | ISFT100N     | ISFT160      | ISFT250      | ISFT400      | ISFT630      | ISFT100N     | ISFT160      |
|-------------------------------------------|----------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Number of devices per row                 | 5                          | 8            | 4            | 2            | 2            | 1            | 6            | 4            |
| Number of vertical modules                | 6                          | 8            | 6            | 9            | 9            | 10           | 8            | 6            |
| Mounting plates                           | LVS03554                   | LVS03553     | LVS03556     | LVS03557     | LVS03557     | LVS03557     | LVS03555     | LVS03555     |
| Front plates<br>[No. of vertical<br>mod.] | with cut-out<br>downstream | LVS03320 [6] | LVS03325 [8] | LVS03321 [6] | LVS03322 [9] | LVS03323 [9] | LVS03324 [8] | LVS03325 [8] |
|                                           | -                          | -            | -            | -            | -            | LVS03802 [2] | -            | -            |

| Connection                                                                        | Direct                                                  |          |          |          |          |          |          |          |
|-----------------------------------------------------------------------------------|---------------------------------------------------------|----------|----------|----------|----------|----------|----------|----------|
|  |                                                         |          |          |          |          |          |          |          |
| Devices                                                                           | ISFT100                                                 | ISFT100N | ISFT160  | ISFT250  | ISFT400  | ISFT630  | ISFT100N | ISFT160  |
| Connection                                                                        | must be made<br>Downstream, with cable or flexible bars |          |          |          |          |          |          |          |
| Long terminal shields                                                             | -                                                       | LV480756 | LV480819 | LV480824 | LV480827 | LV480831 | -        | LV480819 |

| Distribution                                                                        |       |          |  |  |
|-------------------------------------------------------------------------------------|-------|----------|--|--|
|  |       |          |  |  |
| Linergy FH for 2 devices                                                            | 49861 | LV480811 |  |  |
| for 3 devices                                                                       | 49862 | LV480812 |  |  |
| for 4 devices                                                                       | 49863 | LV480813 |  |  |
| Set of 3 connectors<br>(25 to 95 mm²)                                               | 49865 | LV480818 |  |  |
| Set of 3 distribution<br>connectors 3 x 10 mm²                                      | 49860 | LV480814 |  |  |

**Note:** for determining the busbar > page I-60.









## Fupact GS



Horizontal / Vertical

Extended rotary handle

Fusegear/Switch-disconnector

| Mounting<br>650+150                                                               |    | Horizontal                                                                        |          |                                                                                     |             |                                                                                     |          |
|-----------------------------------------------------------------------------------|----|-----------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------|-------------|-------------------------------------------------------------------------------------|----------|
|  |    |  |          |  |             |  |          |
| Devices                                                                           |    | GS32                                                                              | GS63     | GS100 (1)                                                                           | GS160 (1)   | GS250                                                                               | GS400    |
|                                                                                   |    | 3P or 4P                                                                          |          |                                                                                     |             |                                                                                     |          |
| Number of devices per row                                                         |    | 1                                                                                 | 1        | 1                                                                                   |             | 1                                                                                   | 1        |
| Number of vertical modules                                                        |    | 3                                                                                 | 5        | 5                                                                                   |             | 7                                                                                   | 8        |
| Mounting plates                                                                   |    | LVS03559                                                                          | LVS03560 | LVS03560                                                                            |             | LVS03564                                                                            | LVS03566 |
| Front plates with cut-out downstream                                              |    | LVS03308                                                                          | LVS03309 | LVS03309                                                                            |             | LVS03346                                                                            | LVS03347 |
| Nb of vertical modules                                                            |    | -                                                                                 | -        | LVS03801 [1M]                                                                       |             |                                                                                     |          |
| Upstream connection                                                               |    |                                                                                   |          |                                                                                     |             |                                                                                     |          |
| Terminal                                                                          | 3P | -                                                                                 | -        | 3 x GS1AP33                                                                         | 3 x GS1AP43 |                                                                                     |          |
| Cover                                                                             | 4P | -                                                                                 | -        | 4 x GS1AP34                                                                         | 4 x GS1AP44 |                                                                                     |          |




| Mounting<br>650 + 150                                                               |    | Vertical                                                                            |          |                                                                                       |             |                                                                                       |          |
|-------------------------------------------------------------------------------------|----|-------------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------|----------|
|  |    |  |          |  |             |  |          |
| Devices                                                                             |    | GS32                                                                                | GS63     | GS100 (1)                                                                             | GS160 (1)   | GS250                                                                                 | GS400    |
|                                                                                     |    | 3P or 4P                                                                            |          |                                                                                       |             |                                                                                       |          |
| Number of devices per row                                                           |    | 3                                                                                   | 2        |                                                                                       |             | 1                                                                                     | 1        |
| Number of vertical modules                                                          |    | 3                                                                                   | 5        |                                                                                       |             | 6                                                                                     | 6        |
| Mounting plates                                                                     |    | LVS03559                                                                            | LVS03563 |                                                                                       |             | LVS03565                                                                              | LVS03567 |
| Front plates with cut-out downstream                                                |    | LVS03308                                                                            | LVS03309 |                                                                                       |             | LVS03349                                                                              | LVS03349 |
| Nb of vertical modules                                                              |    | -                                                                                   | -        |                                                                                       |             | -                                                                                     | -        |
| Upstream connection                                                                 |    |                                                                                     |          |                                                                                       |             |                                                                                       |          |
| Terminal                                                                            | 3P | -                                                                                   | -        | 3 x GS1AP33                                                                           | 3 x GS1AP43 |                                                                                       |          |
| Cover                                                                               | 4P | -                                                                                   | -        | 4 x GS1AP34                                                                           | 4 x GS1AP44 |                                                                                       |          |


| Distribution                                                                        |  | Lateral busbars                                                                     |  |                                                                                     |  |                                                                                     |  |
|-------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|--|
|  |  |  |  |  |  |  |  |
| Busbars connection                                                                  |  | Linergy LGYE, Linergy LGY or Linergy BS busbars (2)                                 |  |                                                                                     |  |                                                                                     |  |
|                                                                                     |  | Must be made                                                                        |  |                                                                                     |  |                                                                                     |  |

(1) For DIN fuses only.

(2) Selection of flexible bars for the connection Fupact GS ≤ 400 A: &gt; page I-60.

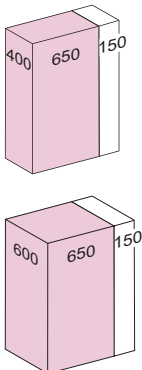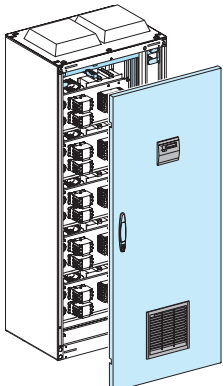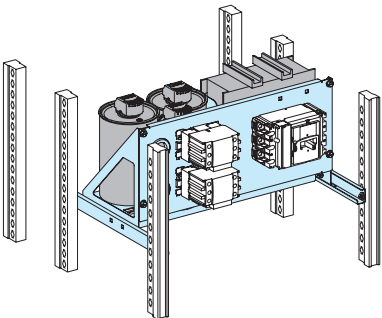Others






| Mounting                                                                          | Door with cut-outs                                                                                                                                                                                                          | Mounting plate                                                                                                                                                                                                                                                               |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  |                                                                                                                                            |                                                                                                                                                                                            |
| Catalog number                                                                    | <b>LVS03970</b>                                                                                                                                                                                                             | <b>LVS03979</b>                                                                                                                                                                                                                                                              |
| Characteristics                                                                   | Special standard cover panels are used. However, a special IP30 door is used (W650 mm with hinges on left only) that has cut-outs, one for the VarplusLogic power factor controller and another in the bottom for a filter. | The mounting plates are designed for installation of capacitors, contactors and devices protecting against internal faults. The power factor correction modules are installed horizontally in the cubicle. Gasket gland plate NSYTPV is necessary for mounting plate wiring. |





| Mounting        | Ventilation accessories                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                           |                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                       |
|-----------------|------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
|                 |                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                           |                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                       |
| Cover panels    | Roof with cut-out<br>D = 400 mm D = 600 mm                                                                 | Fan + top hood                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Top hood without fan                                                                                                                                                                                                                      | Outlet grill                                                                                                                                                                  | Fan with filter                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Spare filter                                          |
| Catalog number  | <b>LVS08478</b> <b>LVS08678</b>                                                                            | <b>NSYCVF575M230MB</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>NSYCAC228RMB</b>                                                                                                                                                                                                                       | <b>NSYACAG291LPF</b>                                                                                                                                                          | <b>NSYCVF850M230PF</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>NSYCAF228R</b>                                     |
| Characteristics | A roof with a cut-out ensures natural ventilation of the equipment. It can also be equipped with two fans. | <b>Fan characteristics</b> <ul style="list-style-type: none"> <li>Power: 85 W</li> <li>Input voltage: 230 V</li> <li>Throughput via outlet grill: <ul style="list-style-type: none"> <li>with 1 outlet grill: 350 m³/hr</li> <li>Free with filter: 575 m³/hr</li> </ul> </li> <li>Noise level: 64 dB.</li> </ul> <b>Top hood characteristics</b> <ul style="list-style-type: none"> <li>Material: steel</li> <li>Finishing parts: painted with epoxy-polyester resin, textured RAL 9003, white</li> <li>IP54</li> <li>Fixing to the top by means of caged nuts and special screws</li> </ul> | <ul style="list-style-type: none"> <li>Material: steel</li> <li>Finishing parts: painted with epoxy-polyester resin, textured RAL 7035 grey</li> <li>IP54</li> <li>Fixing to the top by means of caged nuts and special screws</li> </ul> | <ul style="list-style-type: none"> <li>Material: Injected thermoplastic (ASA PC), self-extinguishing according to UL 94 V-0</li> <li>RAL 9003, white</li> <li>IP54</li> </ul> | <ul style="list-style-type: none"> <li>Power: 150/195 W</li> <li>Input voltage: 207 V... 244 V (230 V)</li> <li>Throughput via outlet grill: <ul style="list-style-type: none"> <li>with 1 outlet grill (m³/h): <ul style="list-style-type: none"> <li>718 (50 Hz)</li> <li>568 (60 Hz)</li> </ul> </li> <li>Free with filter: <ul style="list-style-type: none"> <li>838 (50 Hz)</li> <li>803 (60 Hz)</li> </ul> </li> <li>Noise level: 76/75 dB</li> </ul> </li></ul> | For outlet grill or filter IP54, cut-out 228 x 228 mm |

| Configuration         | 200 kvar                                       | 500 kvar                                       |
|-----------------------|------------------------------------------------|------------------------------------------------|
| <b>Door</b>           |                                                |                                                |
| Catalog number        | <b>LVS03970 + LVS01110</b>                     | <b>LVS03970 + LVS01110</b>                     |
| Designation           | W650 door IP30 with cut-out + W150 wicket door | W650 door IP30 with cut-out + W150 wicket door |
| <b>For front</b>      |                                                |                                                |
| Catalog number        | <b>NSYCVF850M230PF</b>                         | <b>NSYACAG291LPF</b>                           |
| Designation           | Fan with filter                                | Outlet grill                                   |
| <b>For rear</b>       |                                                |                                                |
| Catalog number        | <b>LVS08748</b>                                | <b>LVS08749 + NSYACAG291LPF</b>                |
| Designation           | W800 Rear panel IP55                           | W800 Rear panel IP55 cut-out + outlet grill    |
| <b>Roof</b>           |                                                |                                                |
| Catalog number        | <b>LVS08478</b> or <b>LVS08678</b>             | <b>LVS08478</b> or <b>LVS08678</b>             |
| Designation           | Roof with cut-out                              | Roof with cut-out                              |
| <b>On roof</b>        |                                                |                                                |
| Catalog number        | <b>NSYCAC228RMB</b> x 2                        | <b>NSYCVF575M230MB</b> x 2                     |
| Designation           | 2 top hood without fan IP54                    | 2 fans + top hood IP54                         |
| <b>Mounting plate</b> |                                                |                                                |
| Catalog number        | <b>LVS03979</b>                                | <b>LVS03979</b>                                |
| Designation           | Mounting plate                                 | Mounting plate                                 |

## Industrial control devices

Others

| Mounting                                                                          | On a modular rail                                                                 |                                                                                   |                                                                                    |                                                                                     |                                                                          |                         |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-------------------------|
|  |  |  |  |  |                                                                          |                         |
| Devices                                                                           | Contactor<br>Series D and<br>K ≤ 40 A contactors                                  |                                                                                   | Circuit breaker<br>GV2RT-<br>GV2ME-<br>GV2LE                                       |                                                                                     | Circuit breaker + contactor<br>GV2 + Series D and K ≤<br>40 A contactors | TeSys<br>TeSys modèle U |
| Number of vertical modules                                                        | 3                                                                                 |                                                                                   | 3                                                                                  | 3                                                                                   | 5                                                                        | 5                       |
| Useful length of rail (mm)                                                        | 432                                                                               |                                                                                   | 432                                                                                |                                                                                     | 432                                                                      | 432                     |
| Modular rail (adjustable)                                                         | LVS03402                                                                          |                                                                                   | LVS03401 (2)                                                                       | LVS03402                                                                            | LVS03402                                                                 | LVS03402                |
| Front plates<br>[No. of vertical<br>mod.]                                         | plain                                                                             | LVS03803 [3]                                                                      | -                                                                                  |                                                                                     | -                                                                        | LVS03804 [4]            |
|                                                                                   | transparent                                                                       | -                                                                                 | -                                                                                  |                                                                                     | LVS03342 [4]                                                             | ou LVS03342 [4]         |
|                                                                                   | with cut-out<br>downstream                                                        | -                                                                                 | LVS03203 [3]                                                                       | LVS03203 [3]                                                                        | LVS03205 [5]                                                             | LVS03205 [5]            |
| Characteristics                                                                   | -                                                                                 |                                                                                   | Width of devices without lateral auxiliaries: 45 mm.                               |                                                                                     |                                                                          |                         |

| Mounting                                                                           | On a modular rail                                                                                  |                                     |                  |                                          | On a base plate                                                                                                                                                                                          |                                                                        |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-------------------------------------|------------------|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
|  | <br>DD383842 eps |                                     |                  |                                          | <br>DD383817 eps <br>DD381169 eps |                                                                        |
| Devices                                                                            | Soft starters ATS01                                                                                |                                     |                  |                                          |                                                                                                                                                                                                          | LV/LV transformer                                                      |
|                                                                                    | ATS01N103/106FT                                                                                    | ATS01N109/112FT<br>ATS01N206 to 212 | ATS01N222 to 232 | ATS01N230LY<br>ATS01N244LY<br>ATS01N244Q | ATS01N272LY<br>ATS01N285LY<br>ATS01N272Q<br>ATS01N285Q                                                                                                                                                   | ABL6-TS/TD up to 2500 VA<br>ABL6-RT up to 960 W<br>ABL6-RF up to 480 W |
| Number of vertical modules                                                         | 4                                                                                                  | 5                                   | 6                | 5                                        | 6                                                                                                                                                                                                        | 4                                                                      |
| Useful length of rail (mm)                                                         | 432                                                                                                | 432                                 | 432              | 432                                      | -                                                                                                                                                                                                        | -                                                                      |
| Modular rail (adjustable)                                                          | LVS03402                                                                                           | LVS03402                            | LVS03402         | LVS03402                                 | -                                                                                                                                                                                                        | -                                                                      |
| Slotted mounting plates                                                            | -                                                                                                  | -                                   | -                | -                                        | LVS03572                                                                                                                                                                                                 | LVS03571                                                               |
| Front plate plain<br>[No. of vertical mod.]                                        | LVS03804 [4]                                                                                       | LVS03805 [5]                        | LVS03806 [6]     | LVS03805 [5]                             | LVS03806 [6]                                                                                                                                                                                             | LVS03804 [4]                                                           |
| Characteristics                                                                    | Width of devices (mm)                                                                              |                                     |                  |                                          |                                                                                                                                                                                                          | -                                                                      |
|                                                                                    | 22.5                                                                                               | 45                                  | 45               | 180                                      | 180                                                                                                                                                                                                      |                                                                        |

(1) Version without communication module, auxiliary contact and reversing module.

(2) Non-adjustable.

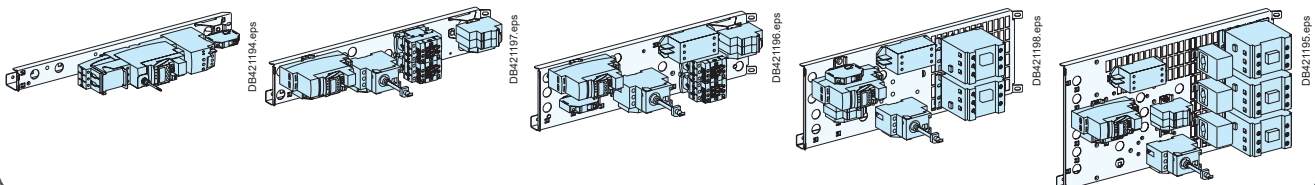




Dedicated mounting plate for Motor Control functional units.



5 commercial references from 1 to 6 modules mounting plates are installed in 650 mm wide cubicle.

- Easy installation
- Switchboard upgradeability
- Mounting plate optimal stacking density
- Functional units reliability.

See PrismaSeT MCC catalog DESW049EN.







| Mounting                                                                          |  | Horizontal distances between centres: 200 mm                                      |  | Horizontal distances between centres: 150 mm                                       |  |
|-----------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------|--|
|  |  |  |  |  |  |
| <b>Devices</b>                                                                    |  | <b>All modular devices</b>                                                        |  | <b>Modular devices ≤ 40 A</b>                                                      |  |
| Rail length (modules of 9 mm)                                                     |  | 48                                                                                |  | 48                                                                                 |  |
| No. of vertical modules                                                           |  | <b>4 (1)</b>                                                                      |  | <b>3</b>                                                                           |  |
| Rail (48 modules of 9 mm)                                                         |  | <b>LVS03401</b>                                                                   |  | <b>LVS03401</b>                                                                    |  |
| Modular front plates                                                              |  | <b>LVS03204</b>                                                                   |  | <b>LVS03203</b>                                                                    |  |
| Blanking strip                                                                    |  | <b>LVS03220</b>                                                                   |  | <b>LVS03220</b>                                                                    |  |
| plate divisible                                                                   |  | <b>LVS03221</b>                                                                   |  | <b>LVS03221</b>                                                                    |  |
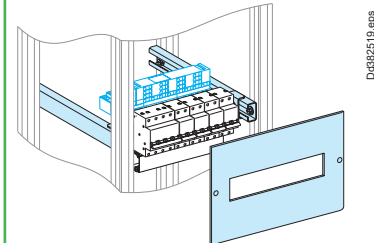
| Mounting                                                                           | Horizontal distances between centres:<br>200 mm                                    | Horizontal distances between centres: 150 mm |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------|
|  |  |                                              |
| <b>Devices</b>                                                                     | <b>All modular devices</b>                                                         | <b>Modular devices ≤ 40 A</b>                |
| Rail length (modules of 9 mm)                                                      | 20                                                                                 | 20                                           |
| No. of vertical modules                                                            | <b>4</b>                                                                           | <b>3</b>                                     |
| Rail (20 modules of 9 mm)                                                          | <b>LVS03404</b> (adjustable)                                                       | <b>LVS03404</b> (adjustable)                 |
| Modular front plates                                                               | <b>LVS03214</b> [4]                                                                | <b>LVS03213</b> [3]                          |
| Blanking plate strip                                                               | <b>LVS03220</b>                                                                    | <b>LVS03220</b>                              |
| divisible                                                                          | <b>LVS03221</b>                                                                    | <b>LVS03221</b>                              |

| Connection                                                                          | Linerigy FH comb busbar                                                             | Distribution block Linergy FM 63 to 200 A row                                        |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |  |
| <b>Type of connected devices</b>                                                    | <b>According devices</b>                                                            | <b>All type</b>                                                                      |
| Comb busbars / distribution blocks                                                  | > <a href="#">page G-30</a>                                                         | > <a href="#">page G-27</a>                                                          |




Linergy TR Terminal blocks: > *page G-42.*




|                         | EnerlinX devices<br>IFM                                                             | I/O module                                                                          | IFE                                                                                  | ComX200                                                                               | ComX510 |
|-------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------|
|                         |  |  |  |  |         |
| No. of vertical modules | 4                                                                                   |                                                                                     |                                                                                      |                                                                                       |         |
| Rail                    | LVS03401 / LVS03404                                                                 |                                                                                     |                                                                                      |                                                                                       |         |
| Modular front plates    | LVS03204 / LVS03214                                                                 |                                                                                     |                                                                                      |                                                                                       |         |
| Characteristics         | Installation by clip on a modular rail.                                             |                                                                                     |                                                                                      |                                                                                       |         |







(1) For a modular row with a 160 A (half row) and 200 A Linergy FM distribution block positioned directly below a non-modular mounting-plate (ComPact, etc.), or at the top of a switchboard, add one additional module (i.e. 4+1) and a plain upstream front plate (LVS03801).



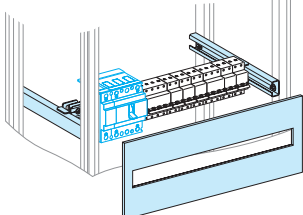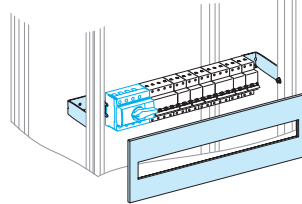Compatible with PowerTag Energy  
Circuit breakers

| Mounting                                                                          | Circuit breakers                                                                  |                                                                   | Switch-disconnectors                                                               |                                                      |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------|
|  |  |                                                                   |  |                                                      |
| <b>Devices</b>                                                                    | NG160, NG160NA<br>Vigi NG160                                                      | NG125, NG125NA, Vigi NG125,<br>C120, Vigi C120, iC120, Vigi iC120 | ComPacT<br>INS40/160                                                               | ComPacT INS-INV100/160<br>with long terminal shields |
| No. of vertical modules                                                           | 5                                                                                 | 5                                                                 | 4                                                                                  | 5                                                    |
| Rail (48 modules of 9 mm)                                                         | LVS03402 (adjustable) (1)<br>+ LVS04227                                           | LVS03401                                                          | LVS03401                                                                           | LVS03401                                             |
| Modular front plates                                                              | LVS03205                                                                          | LVS03205                                                          | LVS03204                                                                           | LVS03205                                             |
| Blanking plate strip                                                              | LVS03220                                                                          |                                                                   | LVS03220                                                                           |                                                      |
| divisible                                                                         | LVS03221                                                                          |                                                                   | LVS03221                                                                           |                                                      |
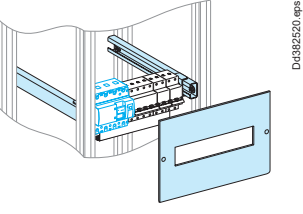
| Mounting                                                                           | Circuit breakers                                                                   |  | Switch-disconnectors                                                                |                                              |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|----------------------------------------------|
|  |  |  |  |                                              |
| <b>Devices</b>                                                                     | NG160, NG160NA, NG125, NSA125/160                                                  |  | INS-INV40/160                                                                       | INS-INV100/160 with long terminal<br>shields |
| No. of vertical modules                                                            | 5                                                                                  |  | 4                                                                                   | 5                                            |
| Rail (20 modules of 9 mm)                                                          | LVS03404 (adjustable) (2)                                                          |  | LVS03404 (adjustable)                                                               | LVS03404 (adjustable)                        |
| Front plates modular                                                               | LVS03214 [4]                                                                       |  | LVS03214 [4]                                                                        | LVS03214 [4]                                 |
| [No. of vertical<br>modules] downstream                                            | LVS03811 [1]                                                                       |  | -                                                                                   | LVS03811 [1]                                 |
| Blanking plate strip                                                               | LVS03220                                                                           |  | LVS03220                                                                            | LVS03220                                     |
| divisible                                                                          | LVS03221                                                                           |  | LVS03221                                                                            | LVS03221                                     |

| Connection                                                                          | Insulated<br>Linergy BW<br>busbars                                                  | Rear Linergy BS<br>busbars                                                          | Linergy BS<br>multi-stage<br>busbars                                                | Linergy DP 1P,<br>160 A<br>distribution<br>block                                     | Linergy DX 4P,<br>160 A<br>distribution<br>block                                      | Linergy DS<br>multi-stage<br>distribution                                             |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |
| <b>Type of connected devices</b>                                                    | All type                                                                            | All type                                                                            | All type                                                                            | All type                                                                             | All type                                                                              | All type                                                                              |
| Distribution block / busbars                                                        | > page G-14                                                                         | > page G-9                                                                          | > page G-11                                                                         | > page G-16                                                                          | > page G-24                                                                           | > page G-28                                                                           |
| Connection                                                                          | > page G-15                                                                         | must be made                                                                        | must be made                                                                        | > page G-16                                                                          | > page G-24                                                                           | must be made                                                                          |

(1) Can be completed by a rail + raiser (cat. no. LVS04227) to instal modular devices on.

**Note:** width of NG160 circuit breakers: NG160 3P: 10 modules / NG160 4P: 14 modules  
Vigi NG160 3P: 24 modules / Vigi NG160 4P: 27 modules  
width of NG125 circuit breakers: NG125 3P: 9 modules / NG125 4P: 12 modules  
Vigi NG125 3P ≤ 63 A: fixed sensitivity 18 modules  
adjustable sensitivity 20 modules  
> 63 A: fixed sensitivity 20 modules  
adjustable sensitivity 20 modules  
Vigi NG125 4P ≤ 63 A: fixed sensitivity 21 modules  
adjustable sensitivity 23 modules  
> 63 A: fixed sensitivity 23 modules  
adjustable sensitivity 23 modules  
C120 or iC120 3P: 9 modules / C120 or iC120 4P: 12 modules  
Vigi C120 or iC120 3P: 19 modules / Vigi C120 or iC120 4P: 22 modules

width of devices: INS-INV40/80: width 10 modules  
INS-INV100/160: width 15 modules.

(2) Can be completed by a rail + raiser (LVS04227) to instal modular devices on.




**Note:** to mix an NSA125/160 circuit breaker with Multi 9 or Acti 9 modular devices, order (with the device) the symmetrical rail + raiser set (28041).  
Width of devices: NSA125/160 3P: 10 modules / NSA125/160 4P: 14 modules.

## Metering

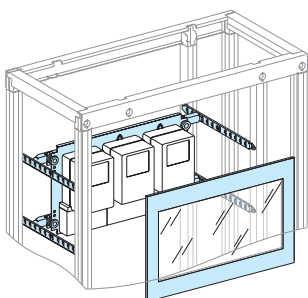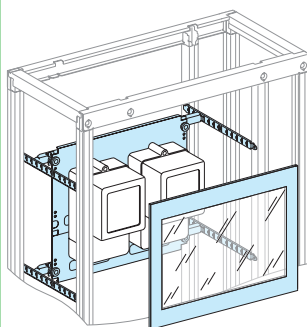Single-phase and 3-phase kilowatt-hour meters

Class 1 & 2

Others

| Mounting                                                                          |             | Behind front plate                                                                |                                                                                    |
|-----------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|  |             |  |  |
| Devices                                                                           |             | Meter and connection block                                                        |                                                                                    |
|                                                                                   |             | Single-phase (Ph + N)                                                             | 3-phase (3 Ph + N)                                                                 |
| Number of devices per row                                                         |             | 3                                                                                 | 2                                                                                  |
| Number of vertical modules                                                        |             | 6                                                                                 | 9                                                                                  |
| Mounting plates                                                                   |             | -                                                                                 | LVS03152                                                                           |
| Front plates<br>[No. of vertical mod.]                                            | transparent | LVS03343 [6]                                                                      | LVS03344 [9]                                                                       |
|                                                                                   | or plain    | LVS03806 [6]                                                                      | -                                                                                  |
| Insulating plate                                                                  |             | -                                                                                 | -                                                                                  |
| Adapter                                                                           |             | LVS03595                                                                          | LVS03595                                                                           |
| Accessories                                                                       |             | M5 spacers for mounting plate > page F-24                                         |                                                                                    |

**Note:** meters can be installed at different levels on the functional uprights of frameworks.



# Metering and human-switchboard interface

## PowerLogic™ Meters

Others



### Presentation

#### PowerLogic™ Meters

Schneider Electric provides these tools via the world's most advanced energy intelligence technology: PowerLogic. The PowerLogic range of meters help manage all energy assets, every second of the day.

#### PowerLogic PM5000 series



The ideal fit for cost management applications, the PowerLogic™ PM5000 power meter provides:

- > Sub-billing/tenant metering
- > Equipment sub-billing
- > Energy cost allocation
- > Track real-time power conditions
- > Monitor control functions
- > Provide basic power quality values
- > Monitor equipment and network status.

#### Acti9 iEM2000 & iEM3000 series

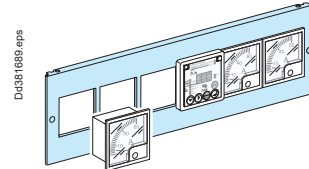


The Acti9 iEM2000 & iEM3000 energy meter series offers a cost-attractive, competitive range of DIN rail-mounted energy meters ideal for:

- > Bill checking to verify that you are only charged for the energy you use
  - > Sub billing individual tenants for their energy consumption, including WAGES
  - > Aggregation of energy consumption, including WAGES, and allocating costs per area, per usage, per shift, or per time within the same facility
  - > Basic metering of electrical parameters to better understand the behavior of your electrical distribution system.
- Combined with communication systems, like Smart Link, the Acti9 iEM2000 & iEM3000 series makes it easy to integrate electrical distribution measurements into facility management systems. It's the right energy meter at the right price for the right job.

### Installation in a switchboard


On a metal front plate with cut-outs, H = 150 mm (3 modules)



- > Devices are attached directly to the metal front plate.
- > Blanking plates are available to blank off any unused locations.
- > Economical solution.


①

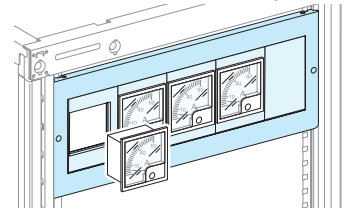- > In the device zone of enclosures and cubicles, like a front plate



②

- > On a door with cut-outs in a 300 or 400 mm wide cubicle
- > On a inclined visor



The degree of protection for installed devices is IP30.

#### Notes:

- To maintain the IP55 degree of protection, the measurement devices must be installed behind a transparent door. If they are installed on a plain door, use the corresponding mounting plates.
- With a power voltage > SELV (12 V), devices on front plates must be mounted with a front plate hinge kit (cat no. LVS08585). The earthing braid must be connected to the front plate frame support (cat no. LVS08566, LVS08564, LVS08560, LVS08562 or else).
- With a power voltage > SELV (12 V) and a supply protection > 16 A, in addition to the preceding rule, the front plate frame support (cat no. LVS08566, LVS08564, LVS08560, LVS08562 or else) must be connected to the cubicle frame, using an earthing braid (cat no. LVS08910 or LVS08911). (standard NF / EN 61439-1 2011 edition).







#### Possible installation

| Cat. number                                 | LVS 03904 | LVS 03928 | LVS 03910 | LVS 03911 | LVS 03913 | LVS 03912 | LVS 03914 |
|---------------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Front plate frame support (LVS08566)        | ■         | ■         | ■         | ■         | ■         | ■         | ■         |
| L300/L400 with cut-out (LVS08593, LVS08594) | ■         | ■         | ■         | ■         | ■         | -         | -         |

**Note:** device mounting on door: earthing braid (cat. no. LVS08910) or earthing wire (cat. no. LVS08911) mandatory.

## Metering and human-switchboard interface

Others

| Number and type of devices per row                                     | Metal front plate with cut-out                                                                                         | No. of vertical mod. | Plastic mounting plates with cut-out                                                                                 | Blanking plate or devices support                                                                                                                                                                                                              |
|------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| W650 Mounting on an interface with plastic mounting plates             |                                                                                                                        |                      |                                                                                                                      |                                                                                                                                                                                                                                                |
| 5 x <div>72 x 72</div> Vigirex and others devices 72 x 72              | <div></div> <div>DD385458 eps</div>   | 3                    | <div></div> <div>DD385465 eps</div> | <div></div> <div>DD385466 eps</div> <div>To blank-off or install:<br/>- 1 to 4 Ø 16 or 22 mm buttons<br/>- 1 device, 45 x 45</div>                          |
| 4 x <div>96 x 96</div> Power Meter and others devices 96 x 96          |                                                                                                                        |                      | <div></div> <div>DD385467 eps</div> | <div></div> <div>DD385468 eps</div> <div>To blank-off or install:<br/>- 1 to 4 Ø 16 or 22 mm buttons<br/>- 1 device, 45 x 45<br/>- one 72 x 72 device</div> |
| 2 x <div>(2)</div> For PM200, 200P, PM5 & PM8 series meters            |                                                                                                                        |                      | LVS03904                                                                                                             | LVS03903                                                                                                                                                                                                                                       |
| W650 Mounting on an inclined visor by 30° with plastic mounting plates |                                                                                                                        |                      |                                                                                                                      |                                                                                                                                                                                                                                                |
| 5 x <div>72 x 72</div> Vigirex and others devices 72 x 72              | <div></div> <div>DD385459 eps</div>   | 3                    | <div></div> <div>DD385465 eps</div> | <div></div> <div>DD385466 eps</div> <div>To blank-off or install:<br/>- 1 to 4 Ø 16 or 22 mm buttons<br/>- 1 device, 45 x 45</div>                          |
| 4 x <div>96 x 96</div> Power Meter and others devices 96 x 96          |                                                                                                                        |                      | <div></div> <div>DD385467 eps</div> | <div></div> <div>DD385468 eps</div> <div>To blank-off or install:<br/>- 1 to 4 Ø 16 or 22 mm buttons<br/>- 1 device, 45 x 45<br/>- one 72 x 72 device</div> |
| 2 x <div>(2)</div> For PM200, 200P, PM5 & PM8 series meters            |                                                                                                                        |                      | LVS03928 (1)                                                                                                         | LVS03903                                                                                                                                                                                                                                       |
| W650 Direct mounting on a metal front plate with cut-outs              |                                                                                                                        |                      |                                                                                                                      |                                                                                                                                                                                                                                                |
| 72 x 72 device                                                         |                                                                                                                        |                      |                                                                                                                      |                                                                                                                                                                                                                                                |
| 6 x <div>72 x 72</div> Vigirex and others devices 72 x 72              | <div></div> <div>DD385460 eps</div> | 3                    | Direct mounting                                                                                                      | <div></div> <div>DD385469 eps</div> <div>To blank-off or install:<br/>- 1 or 2 Ø 22 mm buttons<br/>- 1 device, 45 x 45</div>                              |
|                                                                        | LVS03910                                                                                                               | -                    | LVS03907                                                                                                             |                                                                                                                                                                                                                                                |
| 96 x 96 device                                                         |                                                                                                                        |                      |                                                                                                                      |                                                                                                                                                                                                                                                |
| 3x <div>96 x 96</div> Power Meter and others devices 96 x 96           | <div></div> <div>DD119465 eps</div> | 3                    | Direct mounting                                                                                                      | <div></div> <div>DD385470 eps</div> <div>To blank-off or install:<br/>- 1 or 2 Ø 22 mm buttons<br/>- 1 device, 45 x 45<br/>- one 72 x 72 device</div>     |
|                                                                        | LVS03911                                                                                                               | -                    | LVS03908                                                                                                             |                                                                                                                                                                                                                                                |
| 1 x <div>96 x 96</div> Power Meter and others devices 96 x 96          | <div></div> <div>DD385462 eps</div> | 3                    | Direct mounting                                                                                                      | <div></div> <div>DD385470 eps</div> <div>To blank-off or install:<br/>- 1 or 2 Ø 22 mm buttons<br/>- 1 device, 45 x 45<br/>- one 72 x 72 device</div>     |
|                                                                        | LVS03913                                                                                                               | -                    | LVS03908                                                                                                             |                                                                                                                                                                                                                                                |
| 144 x 144 device + 72 x 72 devices                                     |                                                                                                                        |                      |                                                                                                                      |                                                                                                                                                                                                                                                |
| 1 x <div>144 x 144</div> 144 x 144 device                              | -                                                                                                                      | 4                    | Direct mounting                                                                                                      | <div></div> <div>DD385469 eps</div> <div>To blank-off or install:<br/>- 1 or 2 Ø 22 mm buttons<br/>- 1 device, 45 x 45</div>                              |
| 4 x <div>72 x 72</div> + devices 72 x 72                               |                                                                                                                        |                      | -                                                                                                                    | LVS03907                                                                                                                                                                                                                                       |
| W650 Pushbuttons and lamps Ø 22 mm                                     |                                                                                                                        |                      |                                                                                                                      |                                                                                                                                                                                                                                                |
| 12 x <div>Ø 22 mm</div>                                                | <div></div> <div>DD385464 eps</div> | 2                    | Direct mounting                                                                                                      |                                                                                                                                                                                                                                                |
|                                                                        | LVS03914                                                                                                               | -                    | -                                                                                                                    |                                                                                                                                                                                                                                                |
| W400 Front plate                                                       |                                                                                                                        |                      |                                                                                                                      |                                                                                                                                                                                                                                                |
| 1 x <div>96 x 96</div> Power Meter and others devices 96 x 96          | <div></div> <div>DD385960 eps</div> | 3                    | Direct mounting                                                                                                      | <div></div> <div>DD385470 eps</div> <div>To blank-off or install:<br/>- 1 or 2 Ø 22 mm buttons<br/>- 1 device, 45 x 45<br/>- one 72 x 72 device</div>     |
|                                                                        | LVS03923                                                                                                               | -                    | LVS03908                                                                                                             |                                                                                                                                                                                                                                                |

(1) The visor (cat. no. LVS03928) can be installed on a plain door with cut-out.





(2) For PM200, 200P, PM5 &amp; PM 8 series meters, use 2 no. blank off sheets between each meter.




## Metering and human-switchboard interface





PowerLogic™ Meters





Vigilohm, Vigirex

Others

| Mounting                                                                          |  | Powerlogic system                                                                 |                                                                                   |                                                                                     |                            |
|-----------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------|
|  |  |  |  |  |                            |
| <b>Devices</b>                                                                    |  | <b>FDM121, PM5000 &amp; PM8000 series (2)</b>                                     |                                                                                   | <b>PM3000 series, IEM2000 &amp; iEM3000 series</b>                                  | <b>FDM128 (1)</b>          |
|                                                                                   |  | 1 device                                                                          | 3 devices                                                                         |                                                                                     |                            |
| Number of vertical mod.                                                           |  | 3                                                                                 | 3                                                                                 | 3 or 4                                                                              | 4                          |
| DIN rail                                                                          |  | -                                                                                 | -                                                                                 | LVS03402                                                                            | -                          |
| Front plates [No. of vert. modules]                                               |  | transparent plain                                                                 | -                                                                                 | LVS03342 [4]                                                                        | -                          |
|                                                                                   |  | with cut-out                                                                      | -                                                                                 | -                                                                                   | LVS03804 [4]               |
| Front plate                                                                       |  | LVS03913 [3]                                                                      | LVS03911 [3]                                                                      | LVS03203 [3]                                                                        | LVS03804 [4]               |
|                                                                                   |  | with cut-out for devices 96 x 96                                                  |                                                                                   |                                                                                     | hole ø 22 mm to be stamped |
|                                                                                   |  |                                                                                   |                                                                                   |                                                                                     | hole ø 30 mm to be stamped |

| Mounting                                                                          |  | Powerlogic system                                                                 |                                                                                   |                                      |
|-----------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------|
|  |  |  |  |                                      |
| <b>Devices</b>                                                                    |  | <b>FDM121, PM5000 series, PM8000 series (2)</b>                                   | <b>FDM128 (1)</b>                                                                 | <b>PM5RD, PM89RD96, PM5563RD (3)</b> |
| Number of vertical mod.                                                           |  | 3                                                                                 | 4                                                                                 | 4                                    |
| DIN rail                                                                          |  | -                                                                                 | -                                                                                 | LVS03404                             |
| Front plates [No. of vert. modules]                                               |  | with cut-out plain                                                                | -                                                                                 | -                                    |
|                                                                                   |  | LVS03923 [3]                                                                      | -                                                                                 | LVS03814 [4]                         |
| Front plate                                                                       |  | -                                                                                 | LVS03814 [4]                                                                      | LVS03814 [4]                         |
|                                                                                   |  | with cut-out for devices 96 x 96                                                  | hole ø 22 mm to be stamped                                                        | hole ø 30 mm to be stamped           |

| Mounting                                                                            |  | Vigilohm                                                                            |                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| <b>Devices</b>                                                                      |  | <b>IM400</b><br>with 3 XD301 or with 1 or 2 IFL12                                   | <b>IM10, IM10H, IM20, IM20H</b><br>HV-IM20, HV-IM400, IM9, IM9-OL                   | <b>IM10 / IM10H</b><br><b>IM20 / IM20H</b>                                            |
| Number of vertical mod.                                                             |  | 6                                                                                   | 3                                                                                   | 3                                                                                     |
| Modular rail                                                                        |  | -                                                                                   | LVS03401                                                                            | -                                                                                     |
| Mounting plates                                                                     |  | LVS03930                                                                            | -                                                                                   | -                                                                                     |
| Front plates with cut-outs                                                          |  | LVS03932                                                                            | LVS03203                                                                            | LVS03911                                                                              |
| Characteristics                                                                     |  | Installation in the device compartment                                              |                                                                                     |                                                                                       |

| Mounting                                                                            |  | Vigirex                                                                             | Acti 9                                                                               |                                                                                       |
|-------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| <b>Devices</b>                                                                      |  | <b>RH10/RH21/RH99/RH197M relays</b>                                                 | <b>Lamps, pushbuttons</b>                                                            | <b>Ammeter, voltmeter</b>                                                             |
| Number of vertical mod.                                                             |  | 3                                                                                   | 2                                                                                    | 3                                                                                     |
| Modular rail                                                                        |  | LVS03401                                                                            | LVS03401                                                                             | LVS03401                                                                              |
| Front plates with cut-outs                                                          |  | LVS03203                                                                            | LVS03202                                                                             | LVS03203                                                                              |
| Blanking strip                                                                      |  | LVS03220                                                                            | LVS03220                                                                             | LVS03220                                                                              |
| plate divisible                                                                     |  | LVS03221                                                                            | LVS03221                                                                             | LVS03221                                                                              |
| Characteristics                                                                     |  | Installation in the device compartment                                              |                                                                                      |                                                                                       |

(1) For 72 x 72 mm cases &gt; page E-64.

(2) Only for flush-mounted versions of PM5000 series and PM8000 series.

(3) Only for remote-display versions of PM5000 series and PM8000 series.

E

# Cubicles

### Enclosures

|                     |            |
|---------------------|------------|
| <b>Cover panels</b> | <b>F-2</b> |
| <b>Cubicles</b>     |            |
| Frameworks          | F-5        |

### Dimensions

|                 |            |
|-----------------|------------|
| <b>Cubicles</b> | <b>F-7</b> |
|-----------------|------------|

### Enclosures

|                                                |             |
|------------------------------------------------|-------------|
| <b>Cubicles</b>                                |             |
| IP30/31 cover panels                           | F-14        |
| IP55 cover panels                              | F-17        |
| Plinth                                         | F-19        |
| Cubicle handling and Lifting reinforcement kit | F-20        |
| <b>Installation accessories</b>                | <b>F-21</b> |
| <b>Front plate accessories</b>                 | <b>F-22</b> |

### Others

|                                                            |             |
|------------------------------------------------------------|-------------|
| <b>Reserve space</b>                                       | <b>F-23</b> |
| <b>Fixing accessories</b>                                  | <b>F-24</b> |
| <b>Universal adapter</b>                                   |             |
| PrismaSeT G Active adapter - Mounting on a plain backplate | F-25        |
| <b>Others devices</b>                                      |             |
| Mounting on a slotted plate - Mounting on a modular rail   | F-26        |
| <b>Cable running</b>                                       | <b>F-27</b> |
| <b>Connection accessories</b>                              |             |
| Cable-tie supports, lateral and longitudinal cross-members | F-28        |
| <b>Door handles and locks</b>                              | <b>F-29</b> |
| <b>Ventilation accessories</b>                             |             |
| Panel installation                                         | F-30        |
| Roof installation                                          | F-32        |
| Heat                                                       | F-33        |
| Regulating                                                 | F-34        |
| <b>Switchboard lighting</b>                                | <b>F-35</b> |



### Enclosures

#### 400 mm deep switchboard

For switchboards with front connections.

■ front panels

Any of the following can be installed in front of the hinged front plate frame support:

□ a transparent door (IP30 or IP55)

□ a plain door (IP30 or IP55)

□ a fixed cover frame (IP30)

■ rear panel = screw-on panel

■ side panels = set of two panels

■ plain roof

■ gland plates (plain or in two parts).

##### Parts list for switchboard 1

**1 LVS08406:** framework, W = 650, D = 400, H = 2000

**2 LVS08566:** front plate frame support, W = 650

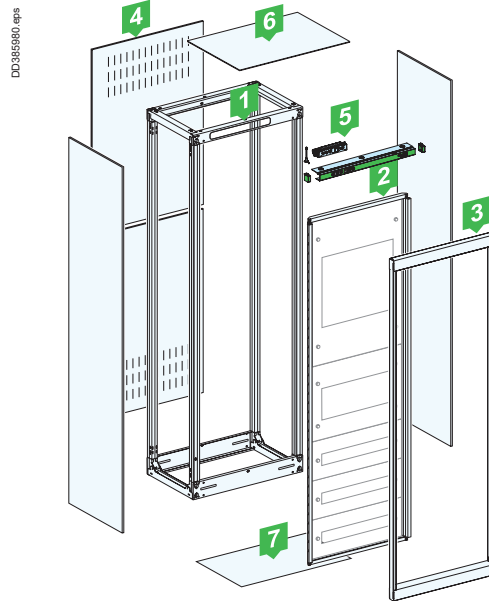
**3 LVS08576:** cover frame, W = 650

**4 LVS08736:** rear panel, W = 650 (two half panels)

**5 LVS08751D:** PrismaSeT P Active Green Cover + Wireless Panel Server W650 + lateral panels D400

**6 LVS08436:** plain roof, W = 650, D = 400

**7 LVS08486:** plain gland plate, W = 650, D = 400



Switchboard 1 - IP30 cubicle with cover frame, W = 650.

#### 600 mm deep switchboard

For switchboards with front connections.

■ front panels

Any of the following can be installed in front of the hinged front plate frame support:

□ a transparent door (IP30 or IP55)

□ a plain door (IP30 or IP55)

□ a fixed cover frame (IP30)

■ rear panel = screw-on panel

■ side panels = set of two panels

■ plain roof

■ gland plates (plain or in two parts).

##### Parts list for switchboard 2

**1 LVS08603:** framework, W = 300, D = 600, H = 2000

**2 LVS08607:** framework, W = 800, D = 600, H = 2000

**3 LVS08606:** framework, W = 650, D = 600, H = 2000

**4 LVS08566:** front plate frame support, W = 650

**5 LVS08513:** plain door, W = 300

**6 LVS08538:** transparent door, W = 800 (supplied with barrier for busbar compartment, W = 150)

**7 LVS08536:** transparent door, W = 650

**8 LVS08733:** rear panel, W = 300 (two half panels)

**9 LVS08738:** rear panel, W = 800 (two half panels)

**10 LVS08736:** rear panel, W = 650 (two half panels)

**11 LVS08761D:** PrismaSeT P Active Green Cover + Wireless Panel Server W650 + lateral panels D600

**12 LVS08633:** plain roof, W = 300, D = 600

**13 LVS08638:** plain roof, W = 800, D = 600

**14 LVS08636:** plain roof, W = 650, D = 600

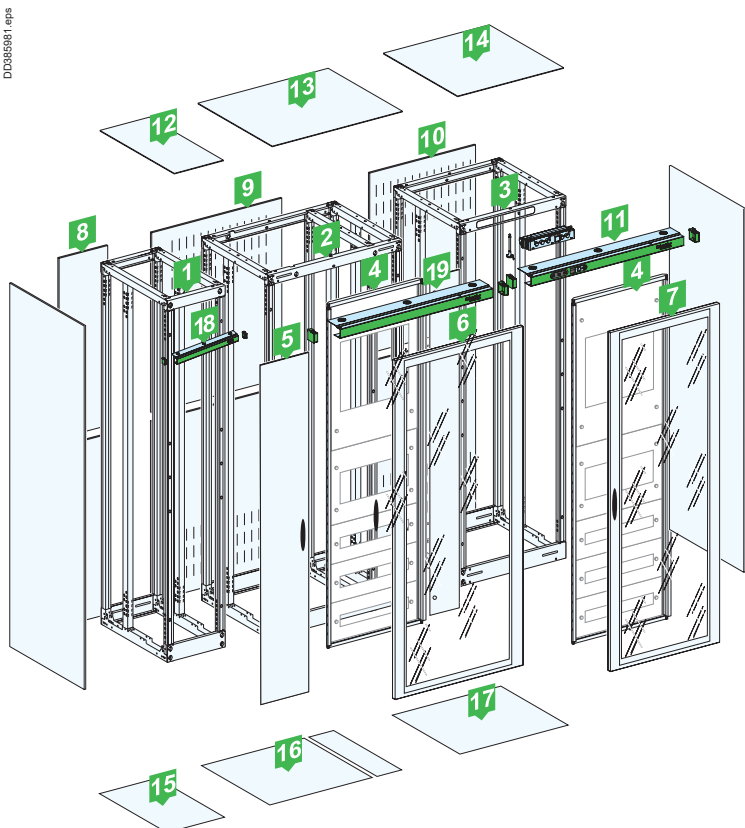
**15 LVS08683:** plain gland plate, W = 300, D = 600

**16 LVS08687:** plain gland plate, W = 800, D = 600



**17 LVS08686:** plain gland plate, W = 650, D = 600.

**18 LVS08640:** PrismaSeT P Active Green Cover W300

**19 LVS08643:** PrismaSeT P Active Green Cover W800



Switchboard 2 - combination of IP30 cubicles with transparent doors.

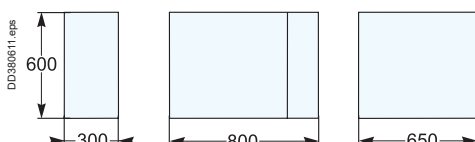

## Cover panels

## Enclosures

## 800 mm deep switchboard

Made up of two cubicles back-to-back.

Rear connections are possible.

■ front panels

Any of the following can be installed in front of the hinged front plate frame support:

□ a transparent door (IP30 or IP55)

□ a plain door (IP30 or IP55)

□ a fixed cover frame (IP30)

■ rear panel = screw-on panel

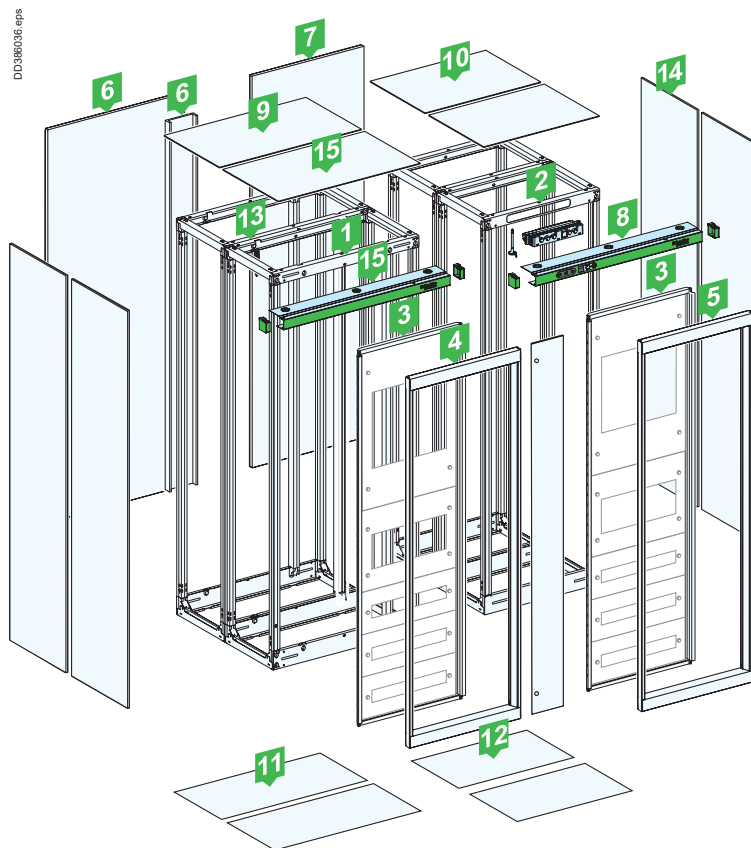
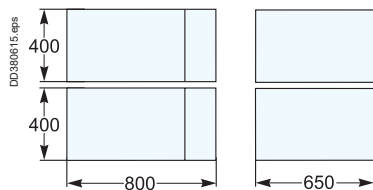
■ side panels = set of two panels

■ plain roof

■ gland plates (plain or in two parts).

## Parts list for switchboard 3

- 1 LVS08407 x 2 :** 2 frameworks, W = 800, D = 400, H = 2000
- 2 LVS08406 x 2 :** 2 frameworks, W = 650, D = 400, H = 2000
- 3 LVS08566:** front plate frame support, W = 650
- 4 LVS08578:** fixed cover frame, W = 800  
(supplied with a wicket door, W = 150)
- 5 LVS08576:** cover frame, W = 650
- 6 LVS08518:** plain door, W = 800  
(supplied with barrier for busbar compartment, W = 150)
- 7 LVS08516:** plain door, W = 650
- 8 LVS08751D :** PrismaSeT P Active Green Cover + Wireless Panel  
Server W650 +lateral panels D400
- 9 LVS08438 x 2 :** plain roofs, W=800, D=400
- 10 LVS08436 x 2 :** plain roofs, W=650, D=400
- 11 LVS08487 x 2 :** 2 plain gland plate, W = 800, D = 400
- 12 LVS08486 x 2 :** 2 plain gland plate, W = 650, D = 400
- 13 LVS08719 x 2 :** double depth combination kit
- 14 LVS08753:** PrismaSeT P Active rear access side panels D400
- 15 LVS08643:** PrismaSeT P Active Green Cover W800



Combination of IP30 cubicles with cover frames.

F

## Cover panels

## Enclosures

## 1000 mm deep switchboard

Made up of two cubicles back-to-back.

Rear connections are possible.

■ front panels

Any of the following can be installed in front of the hinged front plate frame support:

- a transparent door (IP30 or IP55)
- a plain door (IP30 or IP55)
- a fixed cover frame (IP30)

■ rear panel = screw-on panel

■ side panels = set of two panels

■ plain roof

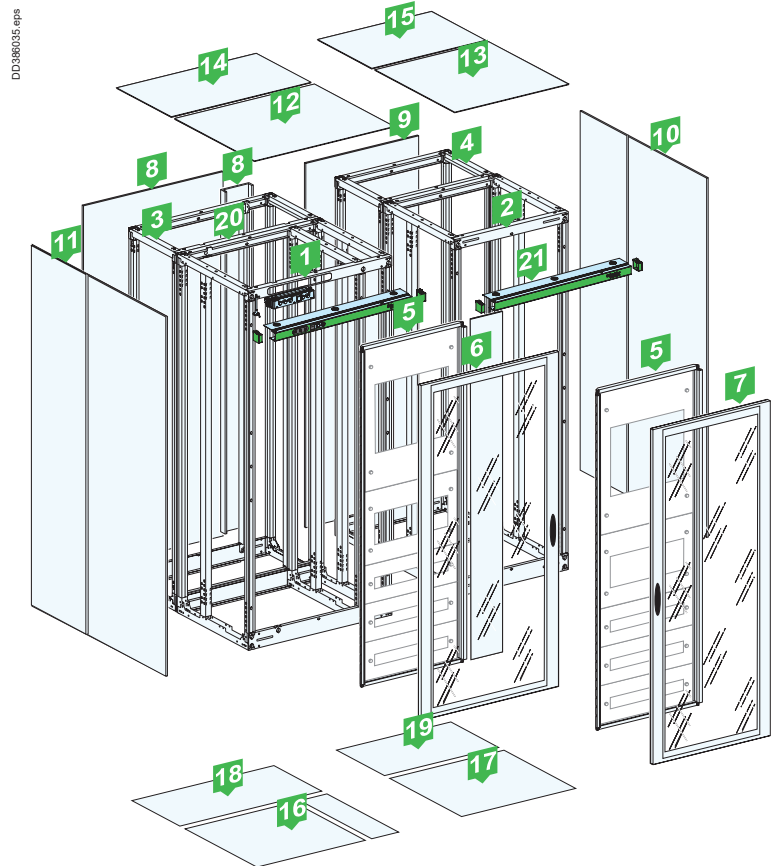
■ gland plates (plain or in two parts).

## Parts list for switchboard 4


- |    |                      |                                                                                   |
|----|----------------------|-----------------------------------------------------------------------------------|
| 1  | <b>LVS08607:</b>     | framework, W = 800, D = 600, H = 2000                                             |
| 2  | <b>LVS08606:</b>     | framework, W = 650, D = 600, H = 2000                                             |
| 3  | <b>LVS08407:</b>     | framework, W = 800, D = 400, H = 2000                                             |
| 4  | <b>LVS08406:</b>     | framework, W = 650, D = 400, H = 2000                                             |
| 5  | <b>LVS08566:</b>     | front plate frame support, W = 650                                                |
| 6  | <b>LVS08538:</b>     | transparent door, W = 800 (supplied with barrier for busbar compartment, W = 150) |
| 7  | <b>LVS08536:</b>     | transparent door, W = 650                                                         |
| 8  | <b>LVS08518:</b>     | plain door, W = 800 (supplied with barrier for busbar compartment, W = 150)       |
| 9  | <b>LVS08516:</b>     | plain door, W = 650                                                               |
| 10 | <b>LVS08762D:</b>    | PrismaSeT P Active Green Cover + Wireless Panel Server W800 + lateral panels D600 |
| 11 | <b>LVS08753:</b>     | PrismaSeT P Active rear access side panels D400                                   |
| 12 | <b>LVS08638:</b>     | plain roof, W = 800, D = 600                                                      |
| 13 | <b>LVS08636:</b>     | plain roof, W = 650, D = 600                                                      |
| 14 | <b>LVS08438:</b>     | plain roof, W = 800, D = 400                                                      |
| 15 | <b>LVS08436:</b>     | plain roof, W = 650, D = 400                                                      |
| 16 | <b>LVS08687:</b>     | plain gland plate, W = 800, D = 600                                               |
| 17 | <b>LVS08686:</b>     | plain gland plate, W = 650, D = 600                                               |
| 18 | <b>LVS08487:</b>     | plain gland plate, W = 800, D = 400                                               |
| 19 | <b>LVS08486:</b>     | plain gland plate, W = 650, D = 400                                               |
| 20 | <b>LVS08719 x 2:</b> | double depth combination kit                                                      |
| 21 | <b>LVS08642:</b>     | PrismaSeT P Active Green Cover W650                                               |

## Parts list for switchboard IP55

- |    |                      |                                                                                   |
|----|----------------------|-----------------------------------------------------------------------------------|
| 1  | <b>LVS08607:</b>     | framework, W = 800, D = 600, H = 2000                                             |
| 2  | <b>LVS08606:</b>     | framework, W = 650, D = 600, H = 2000                                             |
| 3  | <b>LVS08407:</b>     | framework, W = 800, D = 400, H = 2000                                             |
| 4  | <b>LVS08406:</b>     | framework, W = 650, D = 400, H = 2000                                             |
| 5  | <b>LVS08566:</b>     | front plate frame support, W = 650                                                |
| 6  | <b>LVS08548:</b>     | transparent door, W = 800 (supplied with barrier for busbar compartment, W = 150) |
| 7  | <b>LVS08546:</b>     | transparent door, W = 650                                                         |
| 8  | <b>LVS08528:</b>     | plain door, W = 800 (supplied with barrier for busbar compartment, W = 150)       |
| 9  | <b>LVS08526:</b>     | plain door, W = 650                                                               |
| 10 | <b>LVS08767D:</b>    | PrismaSeT P Active Green Cover + Wireless Panel Server W800 + lateral panels D600 |
| 11 | <b>LVS08763:</b>     | PrismaSeT P Active rear access side panels D400                                   |
| 12 | <b>LVS08658:</b>     | plain roof, W = 800, D = 600                                                      |
| 13 | <b>LVS08656:</b>     | plain roof, W = 650, D = 600                                                      |
| 14 | <b>LVS08458:</b>     | plain roof, W = 800, D = 400                                                      |
| 15 | <b>LVS08456:</b>     | plain roof, W = 650, D = 400                                                      |
| 16 | <b>LVS08687:</b>     | plain gland plate, W = 800, D = 600                                               |
| 17 | <b>LVS08686:</b>     | plain gland plate, W = 650, D = 600                                               |
| 18 | <b>LVS08487:</b>     | plain gland plate, W = 800, D = 400                                               |
| 19 | <b>LVS08486:</b>     | plain gland plate, W = 650, D = 400                                               |
| 20 | <b>LVS08719 x 2:</b> | double depth combination kit                                                      |
| 21 | <b>LVS08717 x 2:</b> | IP55 sealing kit for side-by-side combinations                                    |
| 22 | <b>LVS08642:</b>     | PrismaSeT P Active Green Cover W650                                               |








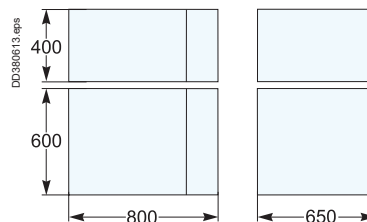
Combination of cubicles with transparent doors.



# Cubicles

## Frameworks



### Enclosures

| Mounting        |                                                                                                                                                                                                         | Frameworks |                                                                                   |          |                                                                                   |                                                             |                                                                                   |          |                                                                                     |                    |                                                                                     |  |  |  |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------------------------------------------------------|----------|-----------------------------------------------------------------------------------|-------------------------------------------------------------|-----------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------------------------|--|--|--|
|                 |                                                                                                                        |            |  |          |  |                                                             |  |          |  |                    |  |  |  |  |
| Width (mm)      | 300                                                                                                                                                                                                     | 400        | 650                                                                               | 800      | 800<br>(650 + 150)                                                                | 300                                                         | 400                                                                               | 650      | 800                                                                                 | 800<br>(650 + 150) |                                                                                     |  |  |  |
|                 | Depth 400 mm                                                                                                                                                                                            |            |                                                                                   |          |                                                                                   | Depth 600 mm                                                |                                                                                   |          |                                                                                     |                    |                                                                                     |  |  |  |
| Cat. no.        | LVS08403                                                                                                                                                                                                | LVS08404   | LVS08406                                                                          | LVS08408 | LVS08407                                                                          | LVS08603                                                    | LVS08604                                                                          | LVS08606 | LVS08608                                                                            | LVS08607           |                                                                                     |  |  |  |
| Composition     | 2 frames                                                                                                                                                                                                |            |                                                                                   |          |                                                                                   | equipped with intermediate uprights for the mounting plates |                                                                                   |          |                                                                                     |                    | 3 frames                                                                            |  |  |  |
|                 | -                                                                                                                                                                                                       |            |                                                                                   |          |                                                                                   | + 2 additional uprights                                     |                                                                                   |          |                                                                                     |                    |                                                                                     |  |  |  |
|                 | ■ 4 cross-pieces.<br>■ Mounting hardware.<br>■ Framework combinations                                                                                                                                   |            |                                                                                   |          |                                                                                   |                                                             |                                                                                   |          |                                                                                     |                    |                                                                                     |  |  |  |
| Characteristics | ■ Cubicles can be combined side-by-side and back-to-back.<br>■ Can be equipped with IP30 or IP55 cover panels.<br><b>Note:</b> for the 800 mm width, the busbar compartment can be on the left or right |            |                                                                                   |          |                                                                                   |                                                             |                                                                                   |          |                                                                                     |                    |                                                                                     |  |  |  |

| Mounting        | Hinged front plate frame support                                                                                                                                                                                    |                                                                                    |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|                 |                                                                                                                                   |  |
| Width (mm)      | 400                                                                                                                                                                                                                 | 650                                                                                |
| Cat. no.        | LVS08564                                                                                                                                                                                                            | LVS08566                                                                           |
| Characteristics | <ul style="list-style-type: none"> <li>■ Reversible for left or right-hand opening.</li> <li>■ Secured at two points.</li> </ul> <p><b>Note:</b> can be mounted on 650 mm and 800 mm (650 + 150) wide cubicles.</p> |                                                                                    |

### Partial hinged cover-frame supports



> page E-8.

| Mounting        | Partial hinged cover-frame supports                                                                                                          |                                                                                                                                                                                             |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 |                                                           |                                                                                                         |
| Width (mm)      | 650                                                                                                                                          |                                                                                                                                                                                             |
|                 | 10 modules                                                                                                                                   | 12 modules                                                                                                                                                                                  |
| Cat. no.        | LVS08560                                                                                                                                     | LVS08562                                                                                                                                                                                    |
| Characteristics | <ul style="list-style-type: none"> <li>■ For drawout MasterPact MTZ2, when hinged front plate frame support is left-hand opening.</li> </ul> | <ul style="list-style-type: none"> <li>■ Use for Fupact ISFL configurations.</li> <li>■ For drawout MasterPact MTZ2, when hinged front plate frame support is left-hand opening.</li> </ul> |



# Cubicles
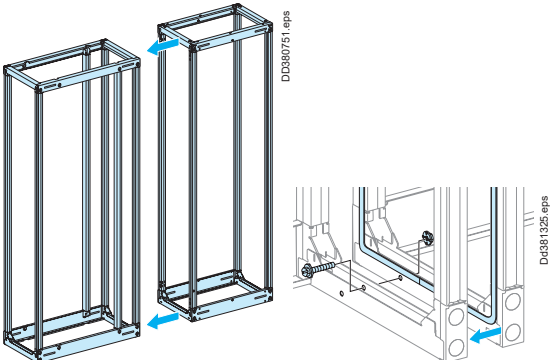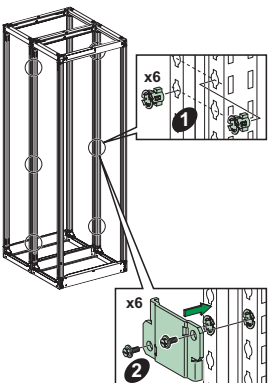
## Frameworks

## Enclosures


| Framework combinations |                                                                                                                                                                                                                |                                                                                                                                                                                                                                              |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        |                                                                                                                               |                                                                                                                                                           |
| Type                   | Side-by-side                                                                                                                                                                                                   | Back-to-back                                                                                                                                                                                                                                 |
|                        | IP55 sealing kit                                                                                                                                                                                               | Double depth combination kit                                                                                                                                                                                                                 |
| Cat. no.               | LVS08717                                                                                                                                                                                                       | LVS08719                                                                                                                                                                                                                                     |
| Characteristics        | The 650 and 800 mm wide frameworks are supplied with a combination kit comprising six M6 bolts. To maintain the IP55 degree of protection, an optional gasket must be installed between the combined cubicles. | The kit is made up of: <ul style="list-style-type: none"> <li>■ a set of hardware for the mechanical connections between the cross-pieces</li> <li>■ six assembly plates to connect the uprights</li> <li>■ the IP55 sealing kit.</li> </ul> |


| Accessories     |                                                                                     |                                                                                      |
|-----------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                 |  |  |
| Type            | Commodities                                                                         |                                                                                      |
|                 | Fixing screws and nuts                                                              |                                                                                      |
| Cat. no.        | LVS08921                                                                            | LVS08718                                                                             |
| Characteristics | Set of 20 screws + wing nuts for framework                                          | Set of 10 screws + combination accessories                                           |

### Dimensions

#### Frameworks, D = 400 mm

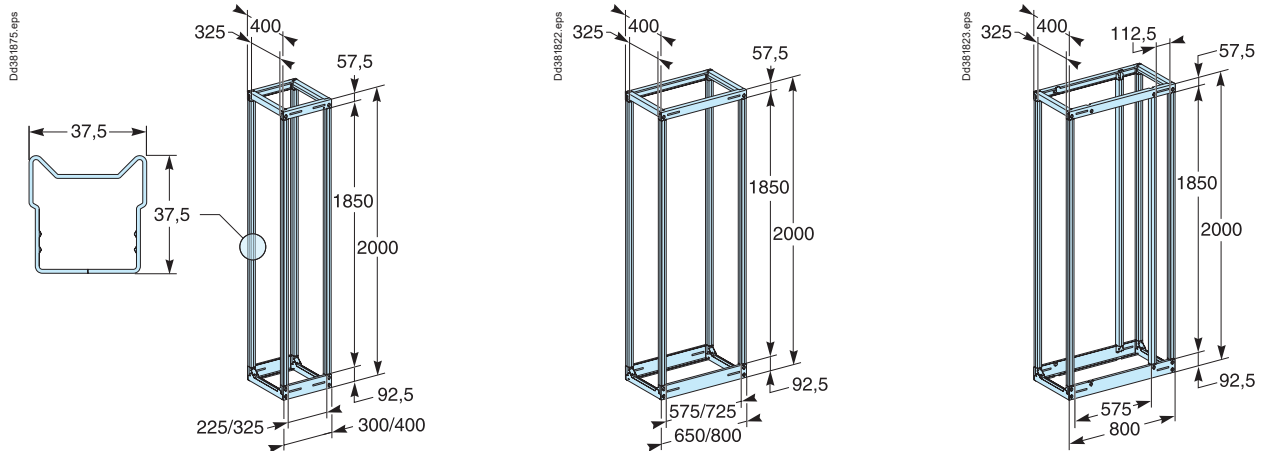

#### Frameworks, D = 600 mm

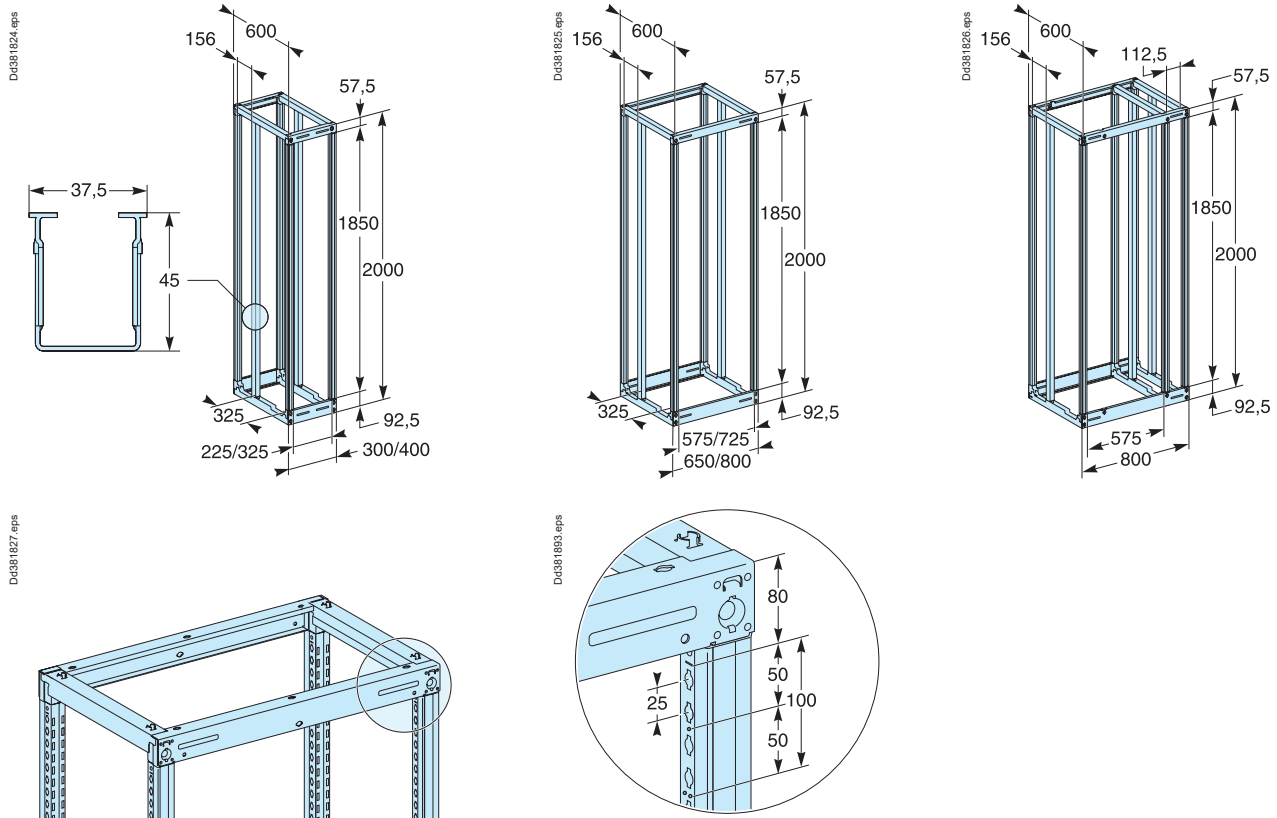


F

#### Fixing to floor
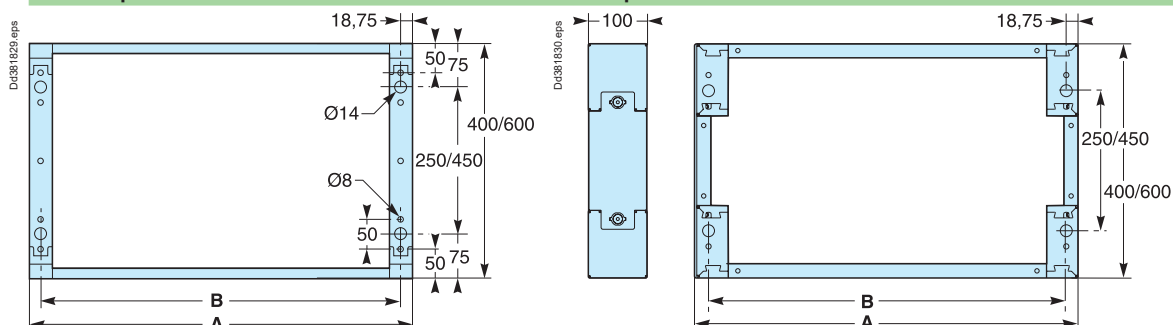
##### Without plinth

##### With plinth




| A   | B     |
|-----|-------|
| 300 | 262.5 |
| 400 | 362.5 |
| 650 | 612.5 |
| 800 | 762.5 |




### Dimensions
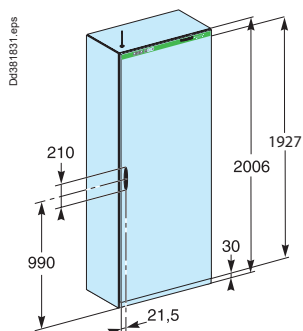
#### Cubicle with cover panels

##### Height





##### Width


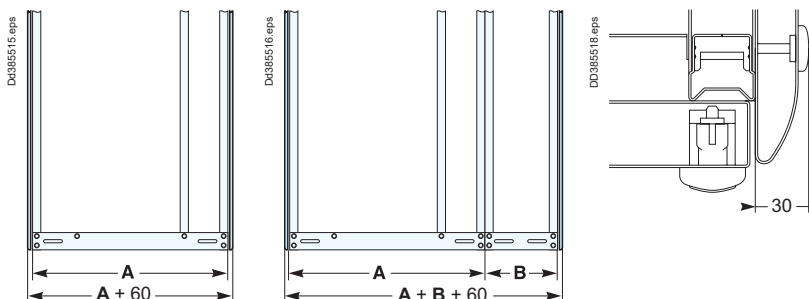


##### Depth
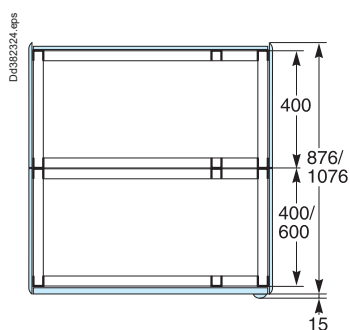
##### Door in front and panel in rear





##### Doors front and rear






##### Door

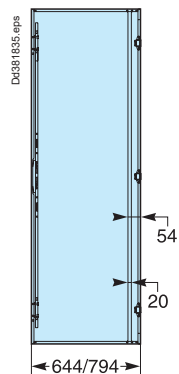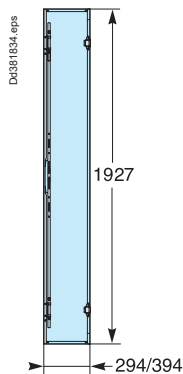
##### IP30 door



##### IP55 door

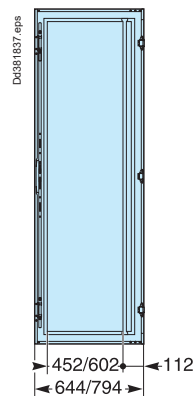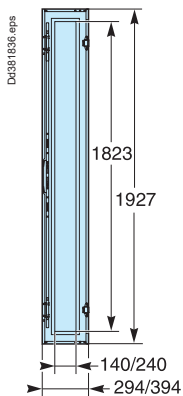


##### Available space behind door

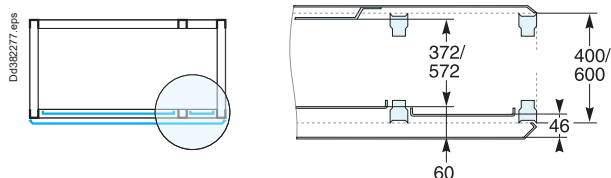


## Dimensions

### Linery LGYE busbars


630 A - 1600 A




2000 A - 2500 A



3200 A - 4000 A







### Layout of horizontal Linery LGYE busbars

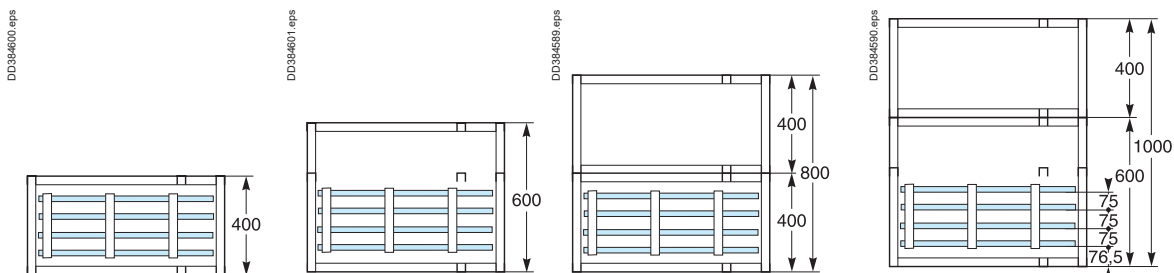

### Layout of vertical Linery LGYE busbars


630 A - 1600 A





2000 A - 2500 A




3200 A - 4000 A



### Horizontal Linery BS busbars




### Layout of horizontal Linery BS busbars

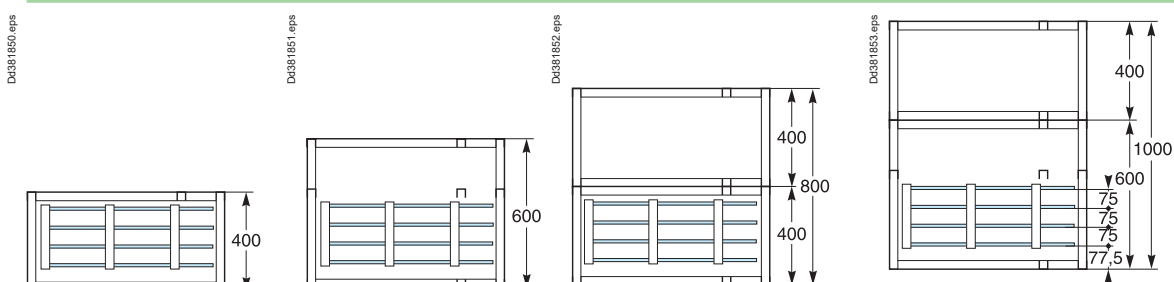


## Cubicles

## Dimensions

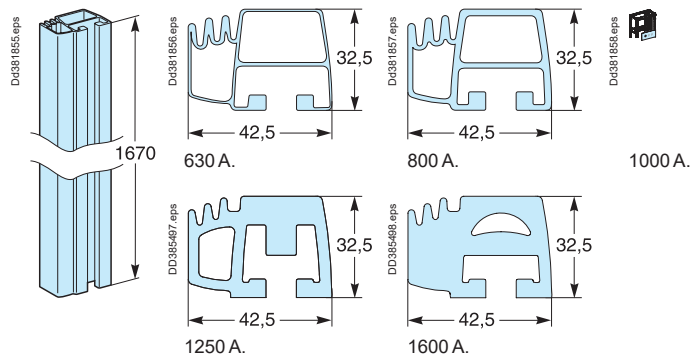
## Vertical Linergy LGY busbars



## Layout of Linergy LGY busbars

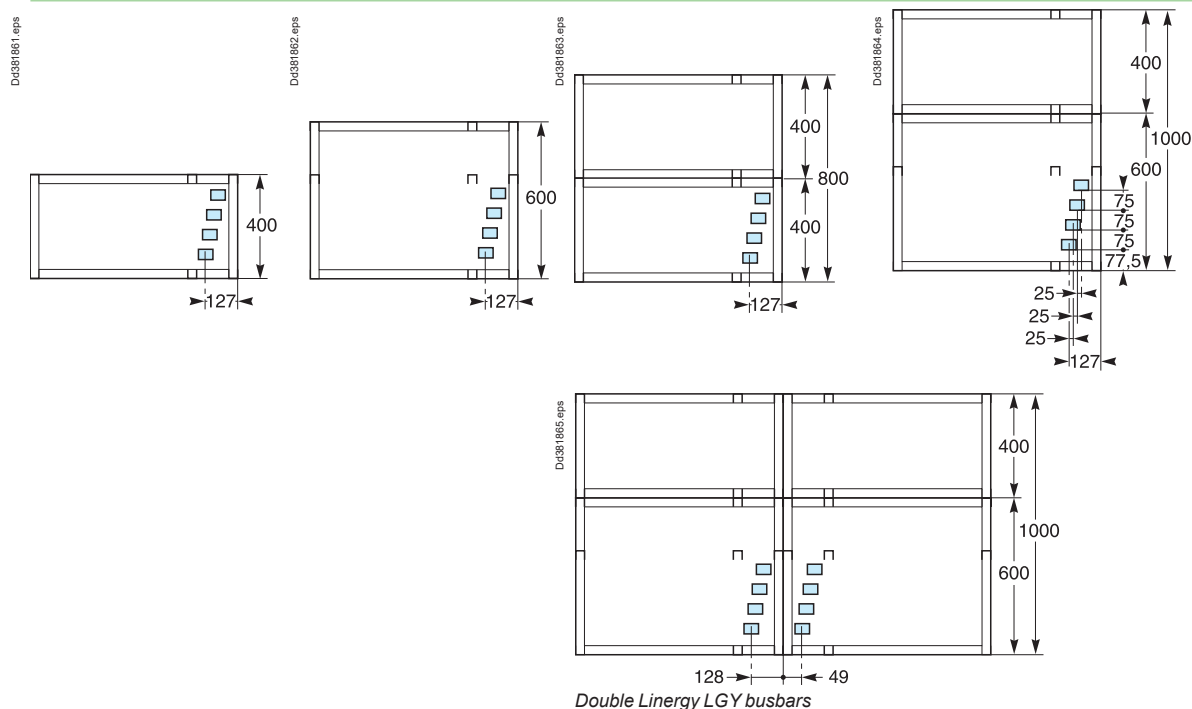


## Layout of rear Linergy BS busbars




| D = 400 mm | B | 284 |
|------------|---|-----|
|            | C | 242 |
| D = 600 mm | B | 484 |
|            | C | 442 |

## Dimensions
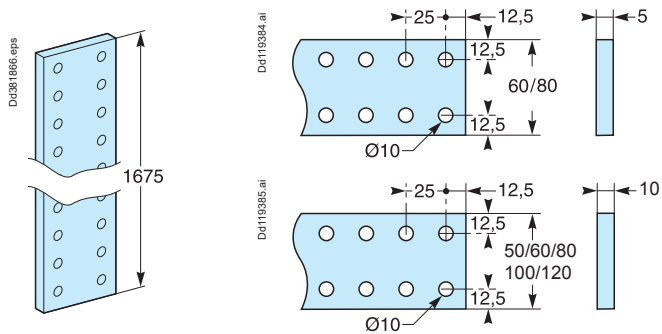
### Vertical Linergy BS busbars




### Layout of lateral Linergy BS busbars

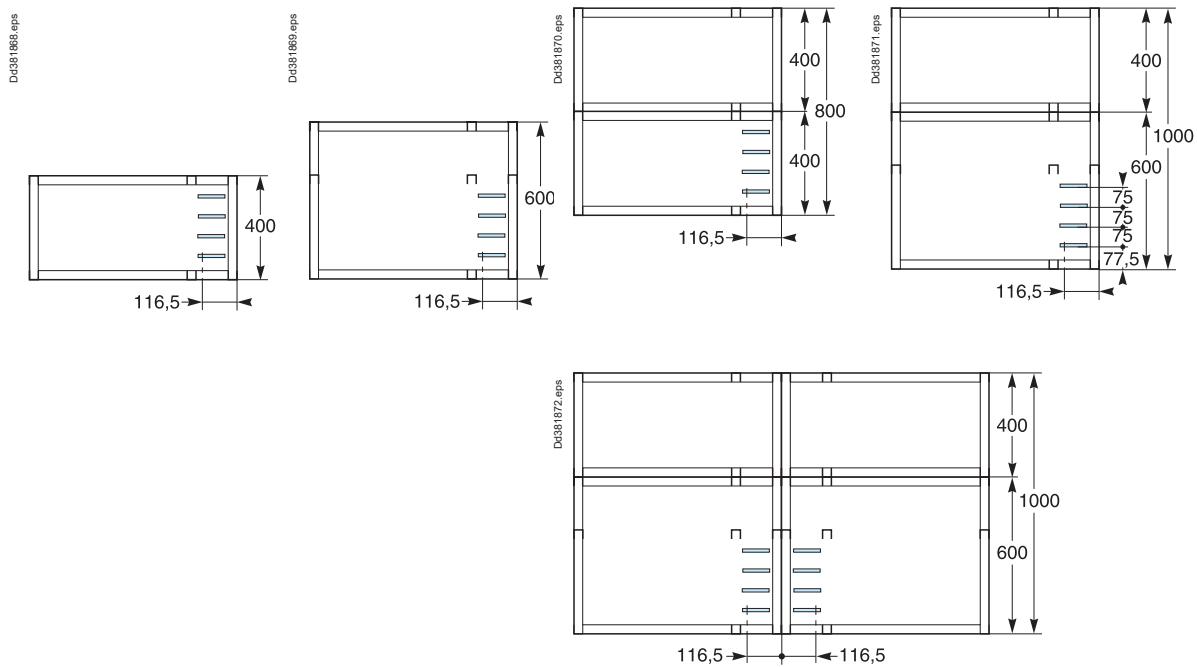

Double Linergy BS busbars.

### Layout of rear Linergy BS busbars





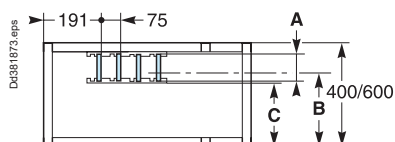


|            | A  |     |     |
|------------|----|-----|-----|
|            | 50 | 60  | 80  |
| D = 400 mm | B  | 284 | 274 |
|            | C  | 250 | 240 |
| D = 600 mm | B  | 484 | 474 |
|            | C  | 450 | 440 |

Dimensions


Plain gland plates

| A   | C   |
|-----|-----|
| 300 | 110 |
| 400 | 210 |
| 650 | 460 |
| 800 | 610 |

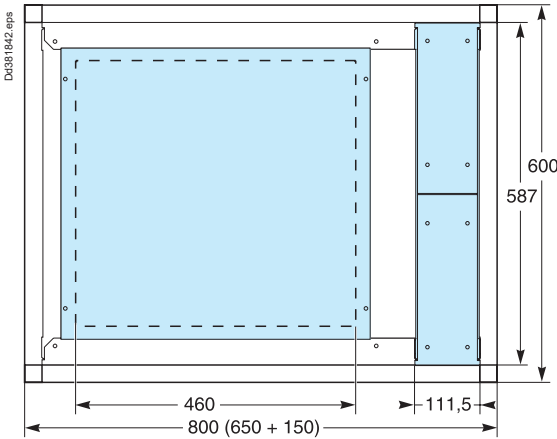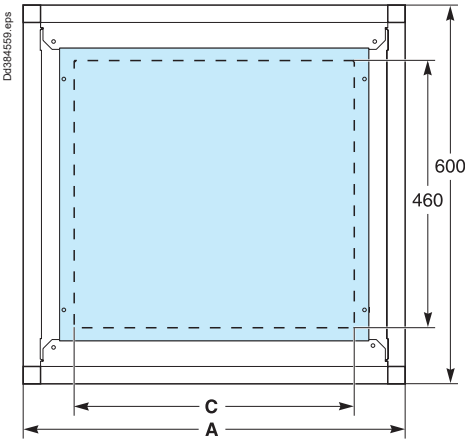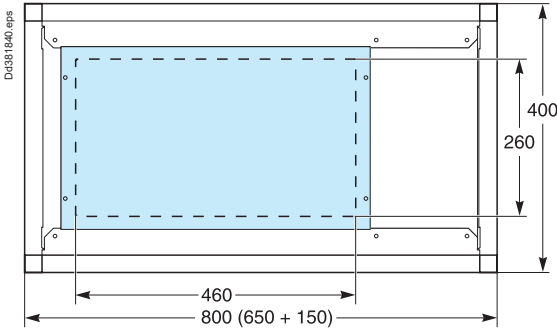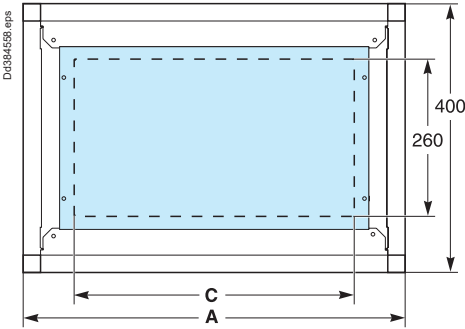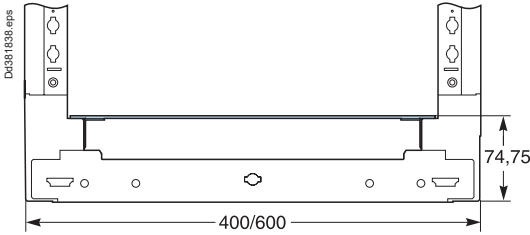

## Dimensions
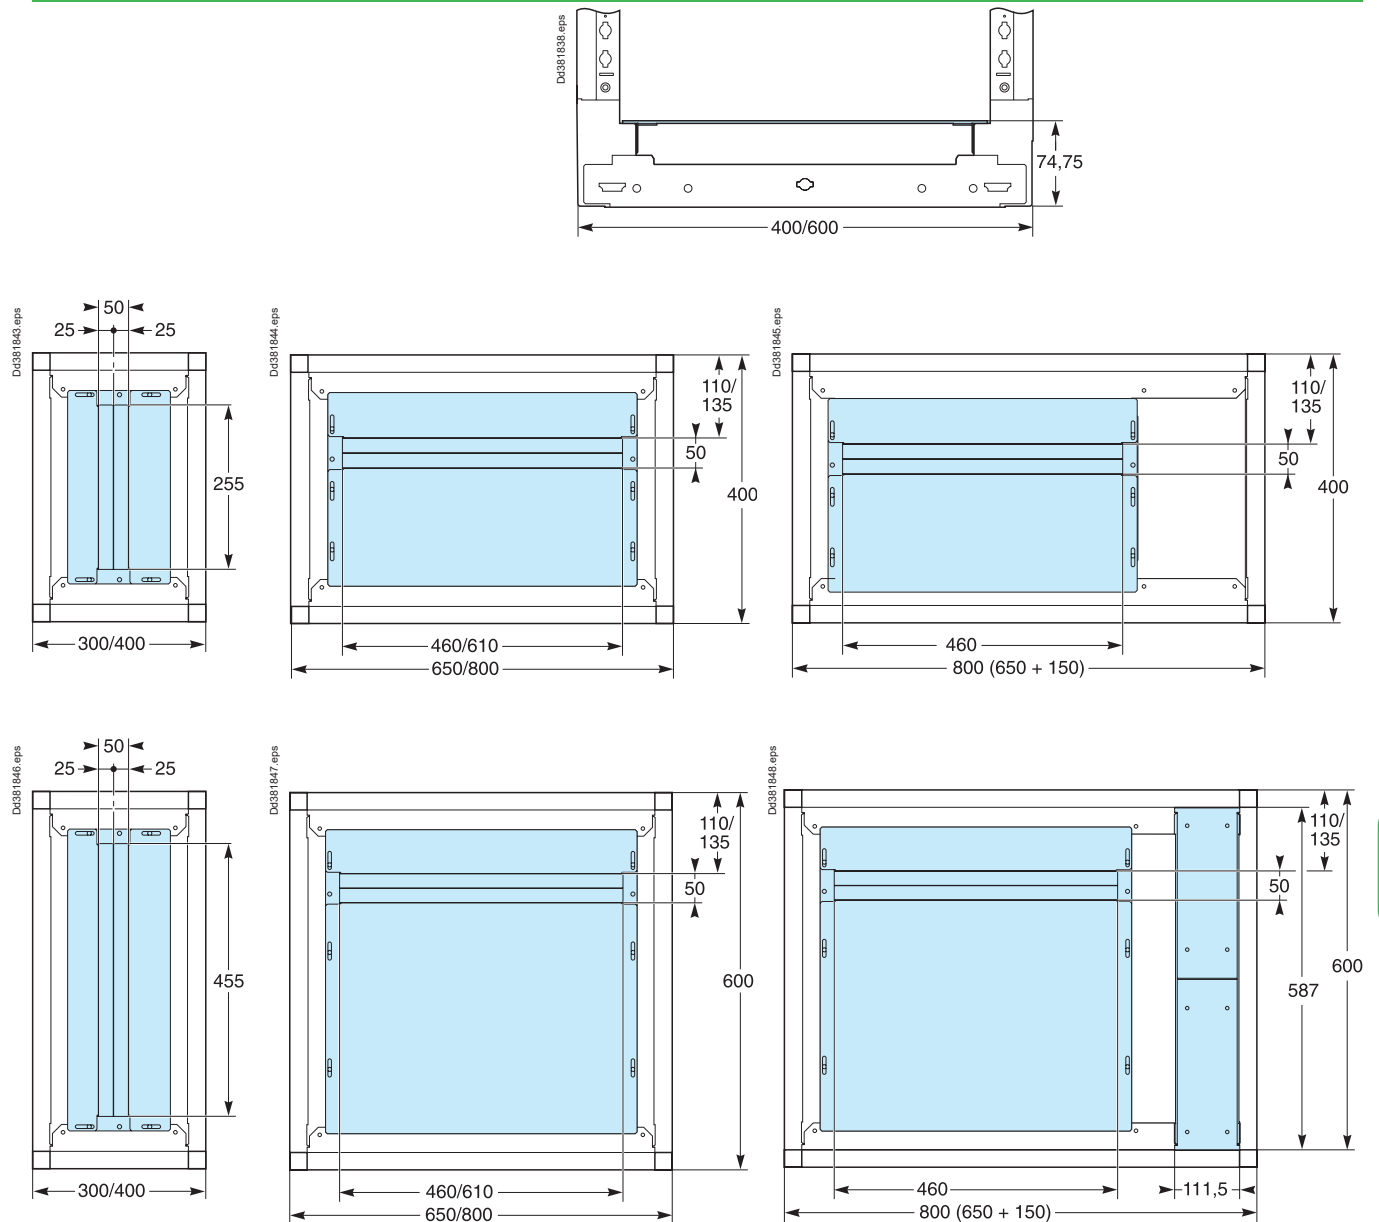
### Two-part gland plates







F





## Cubicles
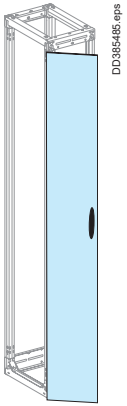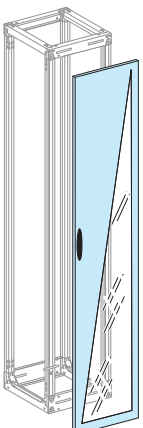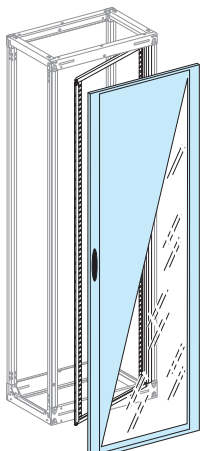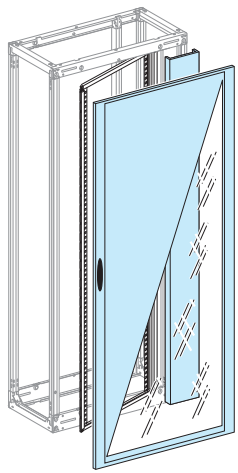
## IP30/31 cover panels

## Enclosures

| Mounting              | Front doors                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                   |                                                                                    |                                                                                     |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |  |  |  |
| Dimensions (mm)       | W = 300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | W = 400                                                                           | W = 650                                                                            | W = 800                                                                             |
| Plain door            | LVS08513                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | LVS08514                                                                          | LVS08516                                                                           | LVS08518                                                                            |
| Transparent door      | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | LVS08534                                                                          | LVS08536                                                                           | LVS08538                                                                            |
| Door with cut-out     | LVS08593                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | LVS08594                                                                          | -                                                                                  | -                                                                                   |
| Reinforced plain door | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | -                                                                                 | LVS01224                                                                           | LVS01225                                                                            |
| Characteristics       | <ul style="list-style-type: none"> <li>■ Reversible for left or right-hand opening IP31.</li> <li>■ Equipped with a handle and keylock (key 405).</li> <li>■ Plain door are IK10 with 3 hinges.</li> <li>■ Reinforced plain door are IK10 with 3 hinges.</li> <li>■ Transparent door are IK10 with 3 hinges.</li> </ul> <p>For other possibilities &gt; <a href="#">page F-29</a>.</p> <p><b>Note:</b> the door with cut-out can be equipped with front plates for 72 x 72 or 96 x 96 instruments &gt; <a href="#">page E-64</a>.</p> <p>The 800 mm door is supplied with a 150 mm barrier for the side compartment, plus a finishing accessory to improve the appearance of the upright.</p> |                                                                                   |                                                                                    |                                                                                     |
| Cover frame           | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | LVS08574                                                                          | LVS08576                                                                           | LVS08578 (1)                                                                        |

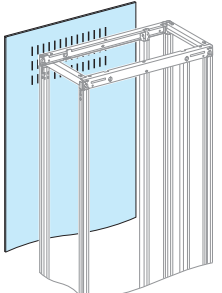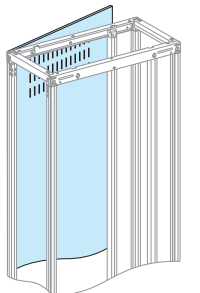
| Mounting        | Rear panels                                                                                                                                 |          |                                                                                      |          |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------------------------------------------------------------------------------|----------|
|                 |                                                          |          |  |          |
| Dimensions (mm) | W = 300                                                                                                                                     | W = 400  | W = 650                                                                              | W = 800  |
| Rear panel      | LVS08733                                                                                                                                    | LVS08734 | LVS08736                                                                             | LVS08738 |
| Characteristics | <ul style="list-style-type: none"> <li>■ Made up of two half panels with vents.</li> <li>■ Supplied with quarter-turn fasteners.</li> </ul> |          |                                                                                      |          |

(1) For 800 mm wide frameworks, the 650 mm frame is supplied with a plain wicket door, 150 mm wide.

## Cubicles

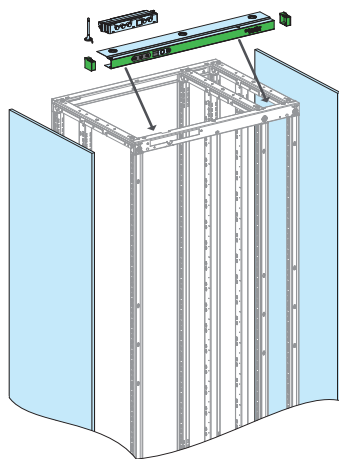IP30/31 cover panels

## Enclosures

Mounting  
Kit: Side Panels + Voltage Presence Indicator/Wireless Panel Server + adapted Green Cover

| Dimensions (mm) | D = 400   | D = 600   |
|-----------------|-----------|-----------|
| W 400           | LVS08750D | LVS08760D |
| W 650           | LVS08751D | LVS08761D |
| W 800           | LVS08752D | LVS08762D |

|                 |                                                                                                                                                                      |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Characteristics | <ul style="list-style-type: none"> <li>Supplied with quarter-turn fasteners.</li> <li>Voltage Presence Indicator to be installed on main incomer section.</li> </ul> |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|


## Rear Side panels
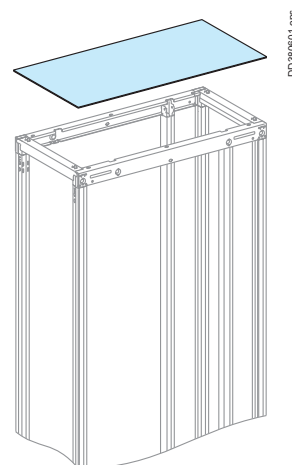
|                 |                                                                                                                                                                                                                  |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Characteristics | <ul style="list-style-type: none"> <li>For combinations of two cubicles with different depths like 800 (400+400) and 1000 (400+600).</li> <li>These panels cannot be installed on the front cubicles.</li> </ul> |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**Note :** For dimensions, Refer page F-17 Side panel dimensions.

## D = 400

|                  |          |
|------------------|----------|
| Rear side panels | LVS08753 |
|------------------|----------|

Mounting  
Roof


| Dimensions (mm)       | W = 300  | W = 400  | W = 650  | W = 800  |
|-----------------------|----------|----------|----------|----------|
| Plain roof D = 400 mm | LVS08433 | LVS08434 | LVS08436 | LVS08438 |
| Plain roof D = 600 mm | LVS08633 | LVS08634 | LVS08636 | LVS08638 |

|                 |                                                                                                                                                                         |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Characteristics | <ul style="list-style-type: none"> <li>Supplied with quarter-turn fasteners for mounting on the framework</li> <li>With markings for cut-outs, if necessary.</li> </ul> |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

IP31 sealing kit  
LVS08711

|                 |                                                                                                                                                                                                                                                                  |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Characteristics | The kit is made up of a self-adhesive gasket that attaches to the roof and a deflector. It ensures the IP31 degree of protection for a 650 or 800 mm wide cubicle, or for two cubicles (800 + 400) when they are equipped with plain or transparent front doors. |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Green Cover to fix on top of each frame

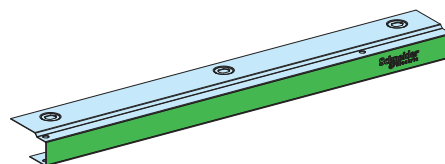

| Dimensions (mm) | W = 300  | W = 400  | W = 650  | W = 800  |
|-----------------|----------|----------|----------|----------|
|                 | LVS08640 | LVS08641 | LVS08642 | LVS08643 |



|                 |                                                                                  |
|-----------------|----------------------------------------------------------------------------------|
| Characteristics | To cover the top of each section which does not have Voltage Presence Indicator. |
|-----------------|----------------------------------------------------------------------------------|





F

## Cubicles

IP30/31 cover panels

Right angle kit




| kit IP30 for Linergy LGYE                                                         | Right-angle                                                                                                                                                                                                                                                                   | Fish plates kit                                                                                                                              |                     |                     |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------------------|
|  | <br>D0386532 eps                                                                                                                                                                             |                                                            |                     |                     |
| cat. number                                                                       | <b>LVS08712</b>                                                                                                                                                                                                                                                               | <b>630-1600 A</b>                                                                                                                            | <b>2000-2500 A</b>  | <b>3200-4000 A</b>  |
| Characteristics                                                                   | <ul style="list-style-type: none"><li>■ Metal duct with busbar supports</li><li>■ Used to create and protect the connection of horizontal busbars between two cubicles installed at right angles.</li><li>■ This kit needs a Linergy LGYE busbar of 1080 mm length.</li></ul> |                                                                                                                                              | 2 x <b>LVS04610</b> | 2 x <b>LVS04611</b> |
|                                                                                   |                                                                                                                                                                                                                                                                               | 2 x <b>LVS04613</b>                                                                                                                          |                     |                     |
|                                                                                   |                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"><li>■ Order the additional joint kit, comprising the 4 copper connections and mounting hardware:</li></ul> |                     |                     |


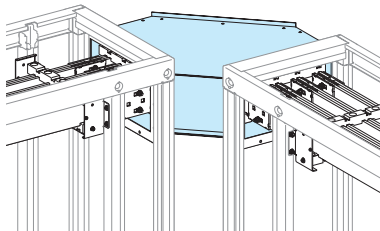
| kit IP30 for Linergy BS                                                           | Right-angle                                                                                                                                                                            | Fish plates kit                                                                                                                                                                                                             |                      |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
|  | <br>D0381337 eps                                                                                      |                                                                                                                                           |                      |
| cat. number                                                                       | <b>LVS08713</b>                                                                                                                                                                        | <b>bars H 50/60</b>                                                                                                                                                                                                         | <b>bars H 80/100</b> |
| Characteristics                                                                   | <ul style="list-style-type: none"><li>■ Metal duct</li><li>■ Used to create and protect the connection of horizontal busbars between two cubicles installed at right angles.</li></ul> |                                                                                                                                                                                                                             | 2 x <b>LVS04640</b>  |
|                                                                                   |                                                                                                                                                                                        | 2 x <b>LVS04641</b>                                                                                                                                                                                                         |                      |
|                                                                                   |                                                                                                                                                                                        | Order: <ul style="list-style-type: none"><li>■ fixed support 2 x <b>LVS04664</b> (if 100 x 10 bar, add 2 x <b>LVS04671</b>)</li><li>■ free support 2 x <b>LVS04662</b> (if 100 x 10 bar, add 2 x <b>LVS04671</b>)</li></ul> |                      |
|                                                                                   | <br>D0381336 eps                                                                                    |                                                                                                                                                                                                                             |                      |

## Cubicles
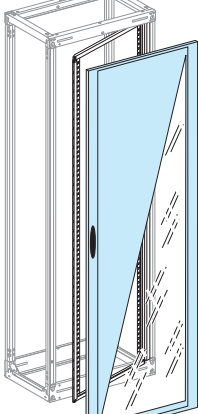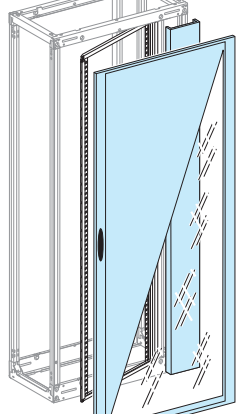
## IP55 cover panels

## Enclosures

| Mounting         | Front doors                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                               |                                                                                                |                                                                                                 |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
|                  |  DD085485 eps                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  DD119390 al |  DD119388 al |  DD119388 al |
| Dimensions (mm)  | W = 300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | W = 400                                                                                       | W = 650                                                                                        | W = 800                                                                                         |
| Plain door       | LVS08523                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | LVS08524                                                                                      | LVS08526                                                                                       | LVS08528                                                                                        |
| Transparent door |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | LVS08544                                                                                      | LVS08546                                                                                       | LVS08548                                                                                        |
| Characteristics  | <ul style="list-style-type: none"> <li>■ Equipped with a factory-mounted polyurethane (PUR) gasket, IP55.</li> <li>■ Reversible for left or right-hand opening</li> <li>■ Equipped with a handle and keylock (key 405).</li> </ul> <p>For other possibilities &gt; <a href="#">page F-29</a>.</p> <p>For IP55 rated configurations, front or rear mounted doors, it is necessary to follow the temperature derating tables, to ensure a convenient installation of devices.</p> <p><b>Note:</b> the 800 mm door is supplied with a 150 mm barrier for the side compartment, plus a finishing accessory to improve the appearance of the upright.</p> |                                                                                               |                                                                                                |                                                                                                 |

| Mounting        | Rear panels                                                                                                                                                                                                                                   |          |                                                                                                   |          |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------------------|----------|
|                 |  DD085487 eps                                                                                                                                              |          |  DD085488 eps |          |
| Dimensions (mm) | W = 300                                                                                                                                                                                                                                       | W = 400  | W = 650                                                                                           | W = 800  |
| Rear panel      | LVS08743                                                                                                                                                                                                                                      | LVS08744 | LVS08746                                                                                          | LVS08748 |
| Characteristics | <ul style="list-style-type: none"> <li>■ Equipped with a factory-mounted polyurethane (PUR) gasket</li> <li>■ Supplied with mounting hardware.</li> <li>■ One-piece, reinforced panel designed to ensure the degree of protection.</li> </ul> |          |                                                                                                   |          |


F

## Cubicles
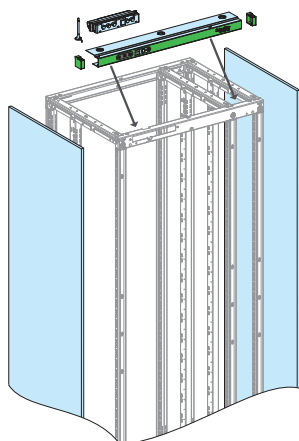
## IP55 cover panels

## Enclosures

### Mounting Kit: Side Panels + Voltage Presence Indicator/Wireless Panel Server + adapted Green Cover




| Dimensions (mm)  | D = 400         | D = 600   |
|------------------|-----------------|-----------|
| W 400            | LVS08755D       | LVS08765D |
| W 650            | LVS08756D       | LVS08766D |
| W 800            | LVS08757D       | LVS08767D |
| Rear side panels | <b>LVS08763</b> | -         |

- Characteristics
- Supplied with quarter-turn fasteners.
  - Voltage Presence Indicator to be installed on main incomer section.


### Rear Side panels

- Characteristics
- For combinations of two cubicles with different depths like 800 (400+400) and 1000 (400+600).
  - These panels cannot be installed on the front cubicles.




| Dimensions (mm)                | D = 400  |
|--------------------------------|----------|
| Rear side panels               | LVS08763 |
| Side panels for L combinations | LVS08756 |

- Characteristics
- Left or right combinations of two cubicles with different depths(400 + 400 or 400 + 600). These panels simply replace the standard side panels.



### Mounting Roof

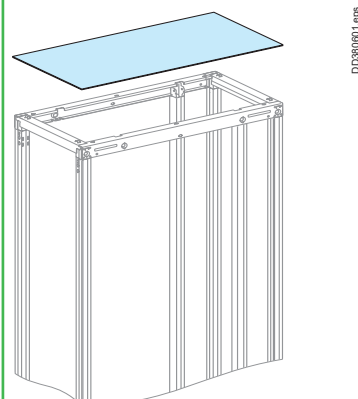


| Dimensions (mm)       | W = 300         | W = 400         | W = 650         | W = 800         |
|-----------------------|-----------------|-----------------|-----------------|-----------------|
| Plain roof D = 400 mm | <b>LVS08453</b> | <b>LVS08454</b> | <b>LVS08456</b> | <b>LVS08458</b> |
| Plain roof D = 600 mm | <b>LVS08653</b> | <b>LVS08654</b> | <b>LVS08656</b> | <b>LVS08658</b> |

- Characteristics
- Supplied with quarter-turn fasteners for mounting on the framework
  - With markings for cut-outs, if necessary.

### IP31 sealing kit LVS08711

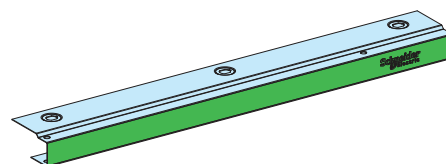- Characteristics
- The kit is made up of a self-adhesive gasket that attaches to the roof and a deflector. It ensures the IP31 degree of protection for a 650 or 800 mm wide cubicle, or for two cubicles (800 + 400) when they are equipped with plain or transparent front doors.

### Green Cover to fix on top of each frame





| Dimensions (mm) | W = 300         | W = 400         | W = 650         | W = 800         |
|-----------------|-----------------|-----------------|-----------------|-----------------|
|                 | <b>LVS08640</b> | <b>LVS08641</b> | <b>LVS08642</b> | <b>LVS08643</b> |

- Characteristics
- To cover the top of each section which does not have Voltage Presence Indicator.





## Cubicles
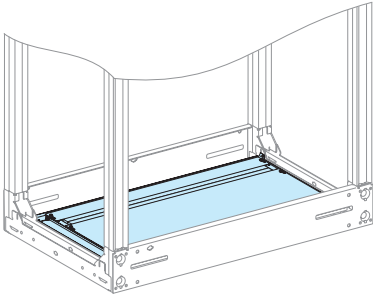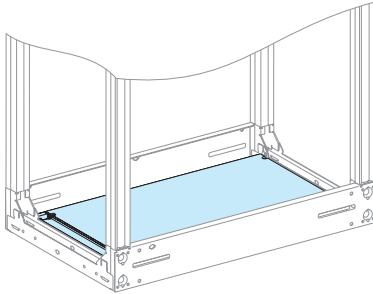
## Plinth

## Enclosures

| Mounting               | Two-part gland plates                                                             |          | IP55, gland plates                                                                 |          |
|------------------------|-----------------------------------------------------------------------------------|----------|------------------------------------------------------------------------------------|----------|
|                        |  |          |  |          |
| Degree of protection   | IP30/IP31                                                                         |          | IP55                                                                               |          |
| Dimensions (in mm)     | D400                                                                              | D600     | D400                                                                               | D600     |
| W = 300 mm             | LVS08493                                                                          | LVS08693 | LVS08483                                                                           | LVS08683 |
| W = 400 mm             | LVS08494                                                                          | LVS08694 | LVS08484                                                                           | LVS08684 |
| W = 650 mm             | LVS08496                                                                          | LVS08696 | LVS08486                                                                           | LVS08686 |
| W = 800 mm (650 + 150) | LVS08497                                                                          | LVS08697 | LVS08487                                                                           | LVS08687 |
| W = 800 mm             | LVS08498                                                                          | LVS08698 | LVS08488                                                                           | LVS08688 |







| Mounting                                              | Plinth H = 100 mm                                                                                                                                                                                                                                                                                                                                                                                                                           |          |          |          |          |          |
|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|----------|----------|----------|
|                                                       |                                                                                                                                                                                                                                                                                                                                                           |          |          |          |          |          |
| Dimensions (mm)                                       | W = 300                                                                                                                                                                                                                                                                                                                                                                                                                                     | W = 400  | W = 650  | W = 800  | D = 400  | D = 600  |
| Four corner posts + two cross-pieces (front and rear) | LVS08723                                                                                                                                                                                                                                                                                                                                                                                                                                    | LVS08724 | LVS08726 | LVS08728 | -        | -        |
| Two side plates                                       | -                                                                                                                                                                                                                                                                                                                                                                                                                                           | -        | -        | -        | LVS08720 | LVS08721 |
| Characteristics                                       | <p>The plinth is made up of two Catalog numbers:</p> <ul style="list-style-type: none"> <li>■ one Catalog number comprising four corner posts + two cross-pieces (front and rear), that can be used in side-by-side combinations or stacked to form a plinth 200 mm high (maximum)</li> <li>■ one Catalog number comprising two side plates (400 or 600 mm).</li> </ul> <p>Each Catalog number is supplied with the necessary hardware.</p> |          |          |          |          |          |
| Examples                                              |    <p>Side-by-side combination of two cubicles with a plinth.</p> <p>Two stacked plinths.</p> <p>The front and rear cross-pieces can be easily removed for a pallet-mover.</p>  |          |          |          |          |          |

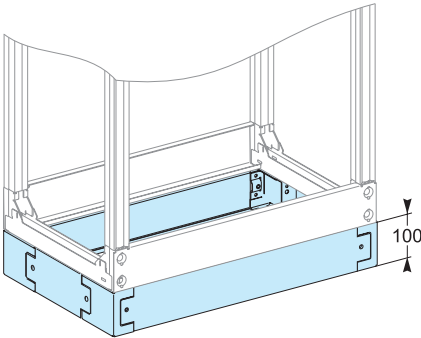

## Cubicles










## Cubicle handling and Lifting reinforcement kit
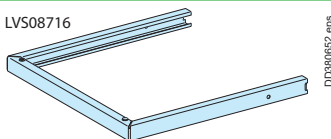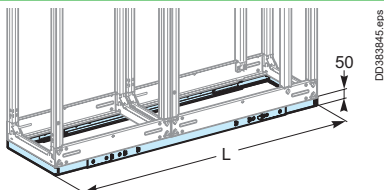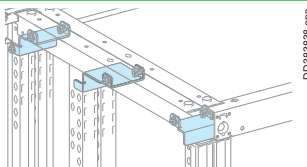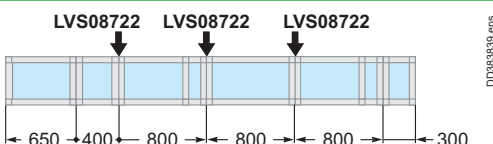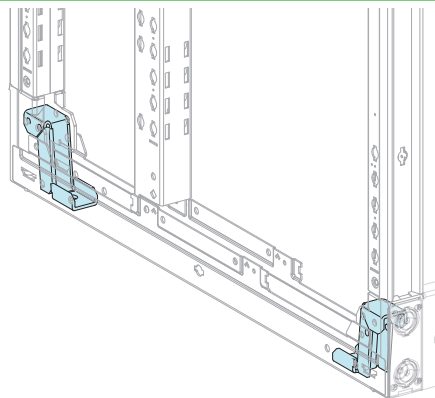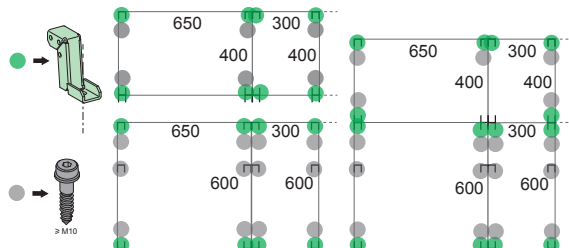
## Enclosures

| Mounting                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Cubicle handling and rolling base                                                   |              |                                                                                      |                |                |                             |           |
|-------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------|----------------|----------------|-----------------------------|-----------|
|                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |    |              |    |                |                |                             |           |
| Dimensions (mm)                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | D = 400                                                                             | D = 600      | L1200 to L1900                                                                       | L2000 to L2550 | L2650 to L3050 |                             |           |
| 2 cubicle handling base end-pieces                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | LVS08714                                                                            | LVS08716     | -                                                                                    | -              | -              |                             |           |
| Cubicle handling                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | -                                                                                   | -            | -                                                                                    | LVS08706       | -              |                             |           |
| Characteristics                                             | <p>This type of base is designed to avoid any risk of cubicle deformation during transport and handling. Five different Catalog numbers offer 27 width possibilities (1200 to 3050 mm) for 400 and 600 mm deep cubicles.</p> <ul style="list-style-type: none"><li>■ Two Catalog numbers each include 2 end-pieces for handling bases for 400 and 600 mm deep cubicles respectively and the corresponding mounting hardware.</li><li>■ Three Catalog numbers each include 2 lengths for the sides of handling bases for 1200 to 3050 mm wide cubicles respectively and the corresponding mounting hardware.</li></ul> <p>Handling bases can be used for both side-by-side and back-to-back cubicle combinations. In this case, the mounting hardware for one of the sets is used.</p> |                                                                                     |              |                                                                                      |                |                |                             |           |
| Mounting                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Lifting reinforcement kit                                                           |              |                                                                                      |                |                |                             |           |
|                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |   |              |   |                |                |                             |           |
| Dimensions (mm)                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | D = 400, D = 600                                                                    |              |                                                                                      |                |                |                             |           |
| Lifting reinforcement kit                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | LVS08722                                                                            |              |                                                                                      |                |                |                             |           |
| Characteristics                                             | <p>Kit LVS08722 is recommended for lifting combined cubicles and can be used together with handling base end-pieces LVS08714 or LVS08716 for severe transport or handling conditions.</p> <p>Catalog number LVS08722 includes 3 reinforcement brackets for 400 or 600 mm deep cubicles and the corresponding mounting hardware.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                     |              |                                                                                      |                |                |                             |           |
| Mounting                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Seismic Kit                                                                         |              |                                                                                      |                |                |                             |           |
|                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |              |  |                |                |                             |           |
| Reinforcement bracket                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | LVS08710                                                                            |              |                                                                                      |                |                |                             |           |
| Characteristics                                             | <p>Catalog number ref LVS08710 includes 1 reinforcement bracket and 4 M6 screws.</p> <ul style="list-style-type: none"><li>■ Plinths are not allowed with seismic kits.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                     |              |                                                                                      |                |                |                             |           |
| Type of cubicle                                             | W300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                     | W400         |                                                                                      | W650           |                | W650 + W150                 |           |
|                                                             | D = 400                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | D = 600                                                                             | D = 400      | D = 600                                                                              | D = 400        | D = 600        | D = 400                     | D = 600   |
| Framework                                                   | LVS08403                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | LVS08603                                                                            | LVS08404     | LVS08604                                                                             | LVS08406       | LVS08606       | LVS08407                    | LVS08607  |
| Reinforcement bracket                                       | LVS08710 x 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                     |              |                                                                                      | LVS08710 x 4   |                | LVS08710 x 6                |           |
| Longitudinal cross men                                      | LVS08773                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                     | LVS08774     |                                                                                      | LVS03587 x 2   |                |                             |           |
| Lateral cross member                                        | LVS03584 x 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | LVS03584 x 2 + LVS03586 x 2                                                         | LVS03584 x 2 | LVS03584 x 2 + LVS03586 x 2                                                          | LVS03584 x 2   |                | LVS03584 x 2 + LVS03586 x 2 |           |
| M10 screw (not supplied)                                    | 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 6                                                                                   | 4            | 6                                                                                    | 4              |                | 6                           |           |
| Side panels IP55 mandatory for IP30 and IP55 configurations | LVS08755                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | LVS08765                                                                            | LVS08755     | LVS08765D                                                                            | LVS08755       | LVS08766D      | LVS08757D                   | LVS08767D |

## Installation accessories

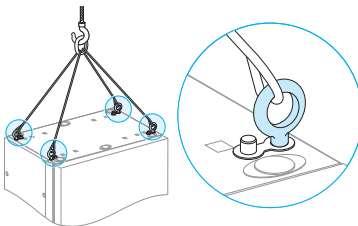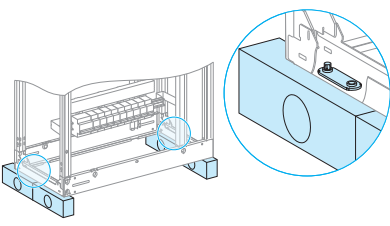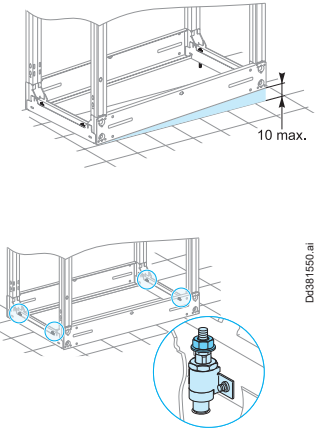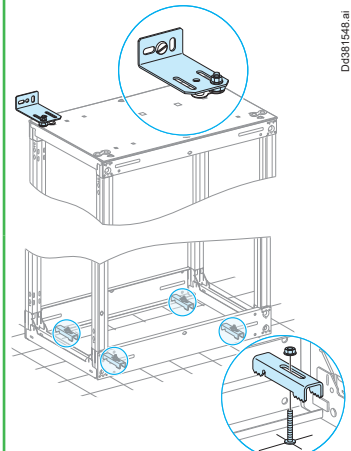


## Enclosures

| Mounting        | Lifting rings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Framework stabiliser kit                                                                               |                                                                                                                          |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
|                 |  <p>Dd381541.ai</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  <p>Dd383946.ai</p>  |                                                                                                                          |
| Cat. no.        | <b>LVS08700</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <b>LVS08701</b>                                                                                        |                                                                                                                          |
| Characteristics | <div><div><ul style="list-style-type: none"><li>■ Set of four lifting rings screwed to the framework.</li><li>■ Use a set of lifting rings for each framework (W = 650 and 800 mm) containing devices.</li><li>■ When two cubicles with devices have been combined, use a lifting beam.</li><li>■ can be installed and removed without removing the roof</li><li>■ even if they are left attached, the switchboard conserves its original degree of protection.</li></ul><p>Dd381542.epa<br/>Dd381543.epa</p><p>Positions of the lifting rings for two combined cubicles containing devices.<br/>In this case, a lifting beam must be used.</p></div><div><ul style="list-style-type: none"><li>■ Made up of four blocks under the framework</li><li>■ Suitable for all types of cubicles, whatever the width and depth</li><li>■ Increases the stability of the cubicle during mounting of devices</li><li>■ Makes possible cubicle handling using a pallet mover or a forklift</li><li>■ Protects the front, side and rear cover panels during handling</li><li>■ Can be reused.</li></ul></div></div>                                                    |                                                                                                        |                                                                                                                          |
| Mounting        | Levelling kit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | False floor fixing kit                                                                                 | Floor/wall fixing kit                                                                                                    |
|                 |  <p>Dd381549.epa<br/>Dd381550.ai</p> <p>10 max.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  <p>Dd381547.ai</p> |  <p>Dd381548.ai<br/>Dd381553.ai</p> |
| Cat. no.        | <b>LVS08702</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <b>LVS08703</b>                                                                                        | <b>LVS08704</b>                                                                                                          |
| Characteristics | <div><div><ul style="list-style-type: none"><li>■ Set of 4 fixtures</li><li>■ can be installed at any time, even when the cubicle is already in position</li><li>■ maximum adjustment range = 10 mm</li><li>■ secures the cubicle to the floor.</li></ul><p>Dd381551.epa</p><p>Recommended positions of the fixtures for combined cubicles.</p></div><div><ul style="list-style-type: none"><li>■ Made up of four independent clamps</li><li>■ clamp on:<ul style="list-style-type: none"><li>□ "U" sections: H = 175 mm, W = 70 mm</li><li>□ "I" sections: H = 120 mm, W = 64 mm</li></ul></li><li>■ clamp travel = 11 mm.</li></ul><p>Dd381552.ai</p></div><div><ul style="list-style-type: none"><li>■ Made up of two brackets and four clamps</li><li>■ can be used to offset the switchboard fixing points for easier access</li><li>■ the wall brackets ensure sufficient wall clearance (at least 30 mm) for natural convection.</li></ul><p>Dd381554.epa</p></div></div> |                                                                                                        |                                                                                                                          |

## Front plate accessories

## Enclosures



## Front plate accessories, blanking plates




| Used for        | Front plate hinge kit                                                                           | Blanking plates                                                                                |                                                                                                                                             |                                                                                                                          |                                                                                      |
|-----------------|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                 |  DD383950.eps  |  DD384029.eps |                                                                                                                                             |  DD384030.eps                         |                                                                                      |
| Cat. no.        | <b>LVS08585 (1)</b>                                                                             | <b>For modular devices</b><br><b>LVS03220</b>                                                  | <b>LVS03221</b>                                                                                                                             | <b>For ComPact NSX100/250</b><br><b>LVS03249</b>                                                                         | <b>LVS03222</b>                                                                      |
| Characteristics | <ul style="list-style-type: none"> <li>■ Set of 2 hinges</li> <li>■ 1 earthing braid</li> </ul> | <ul style="list-style-type: none"> <li>■ Strip</li> <li>■ H = 46 mm, L = 1 m</li> </ul>        | <ul style="list-style-type: none"> <li>■ Divisible</li> <li>■ Set of 4</li> <li>■ H = 46 mm, L = 90 mm</li> <li>■ White RAL 9003</li> </ul> | <ul style="list-style-type: none"> <li>■ Divisible</li> <li>■ H = 85 mm, L = 147 mm</li> <li>■ Blanc RAL 9003</li> </ul> | <ul style="list-style-type: none"> <li>■ Divisible + electronic trip unit</li> </ul> |

(1) With a power voltage > SELV (12 V), devices on front plates must be mounted with a front plate hinge kit (cat no. LVS08585). The earthing braid must be connected to the front plate frame support (cat no. **LVS08566**, **LVS08564**, **LVS08560**, **LVS08562** or else).

With a power voltage > SELV (12 V) and a supply protection > 16 A, in addition to the preceding rule, the front plate frame support (cat no. **LVS08566**, **LVS08564**, **LVS08560**, **LVS08562** or else) must be connected to the cubicle frame, using an earthing braid (cat no. **LVS08910** or **LVS08911**). (standard NF / EN 61439-1 2011 edition).

## Identification labels


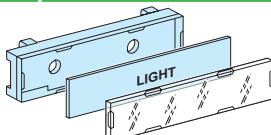
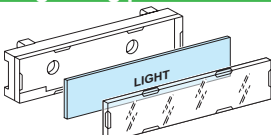
| Used for        | Clip-on labels                                                                                                                                                                                                                                                                                     |                 |                 | Engraving plates                                                                                           |                 |                 |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|------------------------------------------------------------------------------------------------------------|-----------------|-----------------|
|                 |  DD383974.eps                                                                                                                                                                                                    |                 |                 |  DD383975.eps           |                 |                 |
| Cat. no.        | <b>LVS08913</b>                                                                                                                                                                                                                                                                                    | <b>LVS08915</b> | <b>LVS08917</b> | <b>LVS08914</b>                                                                                            | <b>LVS08916</b> | <b>LVS08918</b> |
| Dimensions (mm) | 18 x 35                                                                                                                                                                                                                                                                                            | 18 x 72         | 25 x 85         | 18 x 35                                                                                                    | 18 x 72         | 25 x 85         |
| Characteristics | <ul style="list-style-type: none"> <li>■ Set of 12.</li> <li>■ The clip-on support is supplied with a paper label and a transparent cover.</li> <li>■ It clips onto the front plate horizontally or vertically and can be screwed to any support (plain door, plain front plate, etc.).</li> </ul> |                 |                 | <ul style="list-style-type: none"> <li>■ Set of 12.</li> <li>■ Simply replace the paper labels.</li> </ul> |                 |                 |

| Used for        | Adhesive labels                                                                                      |          |          |          | Symbol sheets                                                                                                                                              |       |
|-----------------|------------------------------------------------------------------------------------------------------|----------|----------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
|                 |  DD381715.eps     |          |          |          |  DD381751.eps<br>DD381753.eps                                           |       |
|                 |                                                                                                      |          |          |          |  DD381752.eps                                                         |       |
| Cat. no.        | LVS08905                                                                                             | LVS08906 | LVS08903 | LVS08904 | 13735                                                                                                                                                      | 13736 |
| Dimensions (mm) | 24 x 180                                                                                             | 36 x 180 | 24 x 432 | 36 x 432 |                                                                                                                                                            |       |
| Characteristics | ■ Set of 12.<br>■ The adhesive label holders are supplied with a paper label and a transparent cover |          |          |          | ■ Set of ten symbol sheets.<br>■ Standard symbols:<br>□ loads: sockets, lights, heating units, etc.<br>□ rooms: bedroom, bathroom, etc.                    |       |
|                 |                                                                                                      |          |          |          | ■ Set of ten symbol sheets<br>■ Special symbols:<br>□ loads: lightning arrester, gate, swimming pool, etc.<br>□ rooms: technical room, computer room, etc. |       |

## Adhesive labels for mimic diagrams





| Used for        | Lines                                   | Outgoing arrows | Incoming arrows | Transformers    |
|-----------------|-----------------------------------------|-----------------|-----------------|-----------------|
| Cat. no.        | <b>LVS01005</b>                         | <b>LVS01006</b> | <b>LVS01007</b> | <b>LVS01008</b> |
| Characteristics | 900 mm long and 7 mm thick<br>Set of 10 |                 |                 |                 |





## Accessories

| Used for        | Switchboard identification plate                                                                 | Drawing holder                                                                                   | Touch-up accessories                                                                               |
|-----------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
|                 |  DD381721.eps |  DD381208.eps |  DD385306.eps |
| Cat. no.        | <b>LVS08900</b>                                                                                  | <b>LVS08963</b>                                                                                  | <b>LVS08961</b>                                                                                    |
| Characteristics | Color: RAL 9003                                                                                  | Color: RAL 9003                                                                                  | Color: RAL 9003                                                                                    |

## Reserve space

Others

| Reserve space                                                                     |                                                                                                                                                                                       |          |          |          |          |          |          |          |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|----------|----------|----------|----------|----------|
|  |                                                                                                      |          |          |          |          |          |          |          |
|                                                                                   | <b>Plain front plate W = 250 mm</b><br><b>H = 50 mm</b> <b>H = 100 mm</b> <b>H = 150 mm</b> <b>H = 200 mm</b> <b>H = 250 mm</b> <b>H = 300 mm</b> <b>H = 450 mm</b> <b>H = 600 mm</b> |          |          |          |          |          |          |          |
| [No. of vertical mod.]                                                            | [1]                                                                                                                                                                                   | [2]      | [3]      | [4]      | [5]      | [6]      | [9]      | [13]     |
| Catalog number                                                                    | LVS03811                                                                                                                                                                              | LVS03812 | LVS03813 | LVS03814 | LVS03815 | LVS03816 | LVS03817 | LVS03722 |
|  |                                                                                                      |          |          |          |          |          |          |          |
|                                                                                   | <b>Transparent front plate W = 250 mm</b>                                                                                                                                             |          |          |          |          |          |          |          |
| [No. of vertical mod.]                                                            | -                                                                                                                                                                                     | -        | -        | [4]      | -        | [6]      | [9]      | -        |
| Catalog number                                                                    | -                                                                                                                                                                                     | -        | -        | LVS03352 | -        | LVS03353 | LVS03354 | -        |




| Reserve space                                                                       |                                                                                                                                                                       |          |          |          |          |          |          |          |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|----------|----------|----------|----------|----------|
|   |                                                                                     |          |          |          |          |          |          |          |
|                                                                                     | <b>Plain front plate W = 500 mm</b><br><b>H = 50 mm</b> <b>H = 100 mm</b> <b>H = 150 mm</b> <b>H = 200 mm</b> <b>H = 250 mm</b> <b>H = 300 mm</b> - <b>H = 600 mm</b> |          |          |          |          |          |          |          |
| [No. of vertical mod.]                                                              | [1]                                                                                                                                                                   | [2]      | [3]      | [4]      | [5]      | [6]      | -        | [12]     |
| Catalog number                                                                      | LVS03801                                                                                                                                                              | LVS03802 | LVS03803 | LVS03804 | LVS03805 | LVS03806 | -        | LVS03808 |
|  |                                                                                    |          |          |          |          |          |          |          |
|                                                                                     | <b>Transparent front plate W = 500 mm</b>                                                                                                                             |          |          |          |          |          |          |          |
| [No. of vertical mod.]                                                              | -                                                                                                                                                                     | -        | -        | [4]      | -        | [6]      | [9]      | [12]     |
| Catalog number                                                                      | -                                                                                                                                                                     | -        | -        | LVS03342 | -        | LVS03343 | LVS03344 | LVS03345 |

F


## Fixing accessories

Others






## Clip-nuts

| Mounting        | For slotted mounting plates                                                       | For modular rails                                                                 | For lateral and longitudinal cross-members                                          |
|-----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                 |  |  |  |
| M4              | <b>LVS03180</b>                                                                   | <b>LVS03164</b>                                                                   | -                                                                                   |
| M5              | <b>LVS03181</b>                                                                   | <b>LVS03165</b>                                                                   | -                                                                                   |
| M6              | <b>LVS03182</b>                                                                   | <b>LVS03166</b>                                                                   | <b>LVS03194</b>                                                                     |
| Characteristics | Set of 20<br>Mounting of various devices                                          | Set of 20<br>Mounting of various devices                                          | Set of 20<br>Mounting in cubicles                                                   |






## Pratic raiser
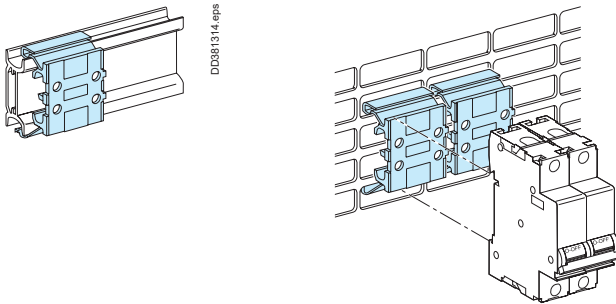
| Raiser          |                                                                                    |
|-----------------|------------------------------------------------------------------------------------|
|                 |  |
| Catalog number  | <b>LVS04224</b>                                                                    |
| Characteristics | Set of 5<br>Height 10 mm, wide 27 mm<br>Color: RAL 9003, insulating material       |

## Hexagonal spacers

| Hexagonal spacers |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |
|-------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                   |  |  |  |  |  |
| M5                | <b>LVS03185</b>                                                                     | <b>LVS03186</b>                                                                     | -                                                                                   | <b>LVS03187</b>                                                                       | -                                                                                     |
| M6                | <b>LVS03195</b>                                                                     | <b>LVS03196</b>                                                                     | <b>LVS03198</b>                                                                     | <b>LVS03197</b>                                                                       | -                                                                                     |
| M8                | -                                                                                   | -                                                                                   | -                                                                                   | -                                                                                     | <b>LVS03199</b>                                                                       |
| Characteristics   | Height: 9 mm<br>Set of 4                                                            | Height: 23 mm<br>Set of 4                                                           | Height: 25 mm<br>Set of 4                                                           | Height: 55 mm<br>Set of 4                                                             | Height: 40 + 10 mm<br>Set of 4                                                        |

## Universal angle brackets

| Universal angle brackets |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |
|--------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                          |  |  |  |  |  |
| Catalog number           | <b>LVS03580</b>                                                                     | <b>LVS03581</b>                                                                     | <b>LVS03582</b>                                                                     | <b>LVS03583</b>                                                                       | <b>LVS04667</b>                                                                       |
| Characteristics          | Set of 4 + vis                                                                      | Set of 2                                                                            | 6 universal inserts                                                                 | Set of 6                                                                              | Set of 2                                                                              |


## Universal adapter

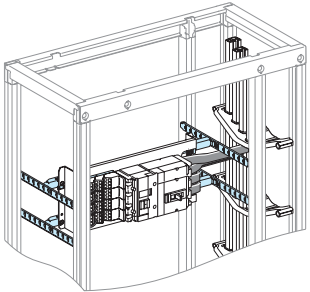PrismaSeT G Active adapter




Mounting on a plain backplate

Others

## PrismaSeT G Active adapter

|                                                                                                                                                                                                                                     | W = 500                                                                           | W = 250                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------|
|                                                                                                                                                                                                                                     |  |                                                     |
| Catalog number                                                                                                                                                                                                                      | <b>LVS03595</b>                                                                   | <b>LVS03596</b>                                     |
| Characteristics                                                                                                                                                                                                                     | For installation in a device compartment W = 650 mm                               | For installation in a device compartment W = 400 mm |
| Kit with four lateral and two longitudinal cross-members that can be depth adjusted.<br>Installation of components, notably the functional mounting plates, the Linergy BW insulated busbars and the 400 A rear Linergy BS busbars. |                                                                                   |                                                     |

## Mounting on a plain backplate
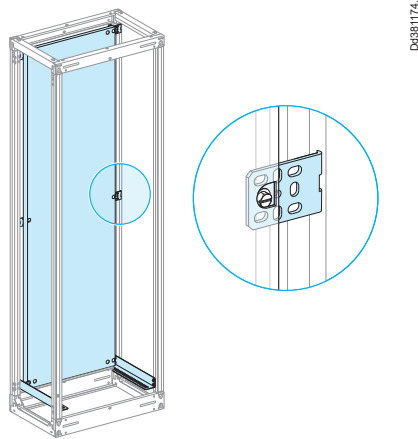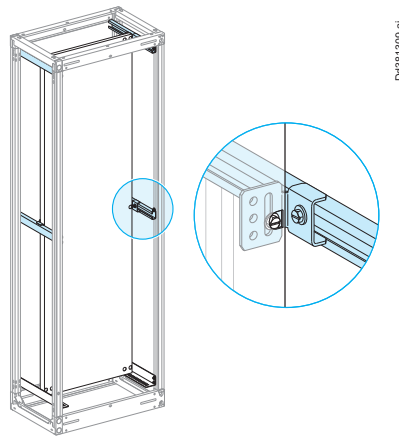
| Mounting                                                                           | Plain backplate                                                                                      |  | Slide rails + angle brackets                                                         |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------|
|  |                    |  |  |
| Catalog number                                                                     | LVS03570                                                                                             |  | LVS03569                                                                             |
| Characteristics                                                                    | 36 modules 510 mm wide for installation in a device compartment W = 650 mm or W = 800 mm (650 + 150) |  | 36 modules 660 mm wide for installation for a cubicle W = 800 mm                     |
|                                                                                    |                                                                                                      |  | LVS03593                                                                             |
|                                                                                    |                                                                                                      |  | Set of 2 for the installation and depth adjustment                                   |

**Note:** the adapter **LVS03595** can be used for all mounting plates, except **LVS03030**.

The Linergy BW busbars can be positioned to the left, middle or right of the modular row.

Depth adjustable, the busbars can be supplied by a ComPacT INS-INV switch-disconnector or a fixed/withdrawable ComPacT NSX circuit breaker, whatever the type of operating system (toggle, rotary handle, motor mechanism).

For Linergy BW busbars, order two adapters (**LVS03595** x 2).






## Others devices

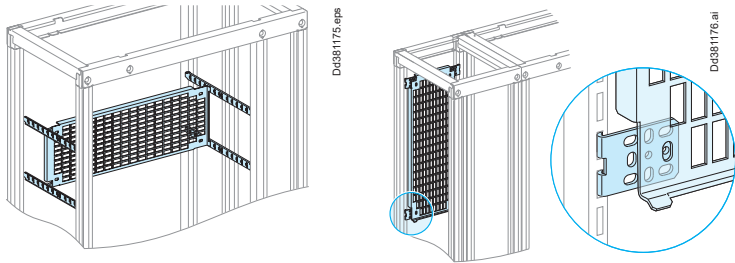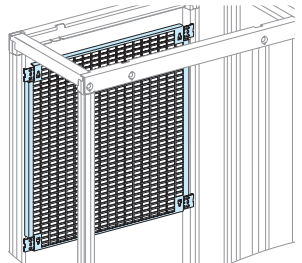Mounting on a slotted plate






Mounting on a modular rail

Others


## Mounting on a slotted plate

| Mounting                                                                          | Slotted mounting plates + lateral cross-members                                                                                                                                                                                                                                 |              | Slotted mounting plate without lateral cross-members                                                                                                                                                                                                                                    |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  |                                                                                                                                                                                               |              |                                                                                                                                                                                                      |
| Catalog number                                                                    | LVS03571                                                                                                                                                                                                                                                                        | LVS03572     | LVS03574                                                                                                                                                                                                                                                                                |
| Number of vertical modules                                                        | 4                                                                                                                                                                                                                                                                               | 6            | 12                                                                                                                                                                                                                                                                                      |
| Height (mm)                                                                       | 200                                                                                                                                                                                                                                                                             | 300          | 600                                                                                                                                                                                                                                                                                     |
| 2 universal angle brackets                                                        | -                                                                                                                                                                                                                                                                               | 2 x LVS03581 | -                                                                                                                                                                                                                                                                                       |
| Characteristics                                                                   | <b>Installation</b> <ul style="list-style-type: none"> <li>■ either in the device zone on the four lateral cross-members (depth adjustment is possible)</li> <li>■ or vertically at the rear of a cable compartment, W = 300 mm (LVS03571) or W = 400 mm (LVS03572).</li> </ul> |              | Galvanised, slotted metal mounting plate<br>Supplied with four angle brackets, they connect directly to the rear of a framework, W = 650 mm or 800 mm (650 + 150 mm)<br>The mounting plate can also be installed using two sets of two slide rails (LVS03593 x 2) for depth adjustment. |

## Mounting on a modular rail



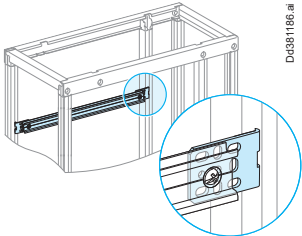
| Mounting                                                                            | Modular rails                                                                       |                                                                                     |                                                                                       | Modular rail W = 650 mm                                                               |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |   |  |
| Catalog number                                                                      | LVS03401                                                                            | LVS03402                                                                            | LVS04226 (1)                                                                          | LVS03590                                                                              |
| Characteristics                                                                     | Useful length: 432 mm                                                               | Useful length: 432 mm<br>Modular rail (adjustable)                                  | Set of 2 rails, useful length: 1600 mm with 4 holes, Ø 6.4 mm, 450 mm between centres | W = 650 mm<br>Supplied with two angle brackets for mounting on the framework          |

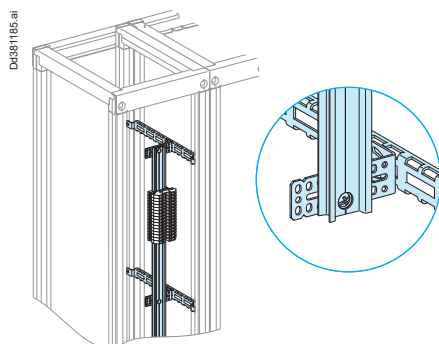(1) Example of a Linergy busbars installed in a busbar compartment, on a modular rail cat. no. LVS04226 + LVS03581 + LVS08794: > page G-40.





Others

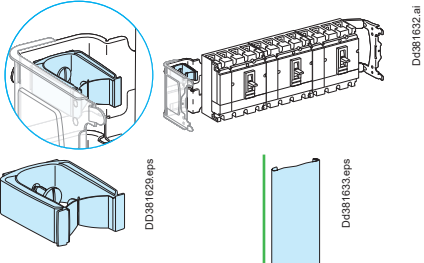


Straps and covers

| Type            | Vertical cable straps                                                             | Covers for vertical cable straps                                                  | Horizontal cable straps                                                             | Covers for horizontal cable straps                                                  |
|-----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                 |  |  |   |  |
| Catalog number  | <b>LVS04262</b>                                                                   | <b>LVS04263</b>                                                                   | <b>LVS04239</b>                                                                     | <b>LVS04243</b>                                                                     |
| Characteristics | Set of 12                                                                         | Set of 2 x 1 m                                                                    | Set of 12<br>Horizontal cable straps have the same capacity as 60 x 30 mm trunking. | Set of 4 covers of 430 mm                                                           |

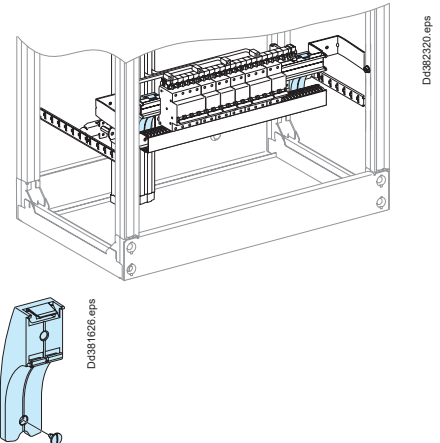
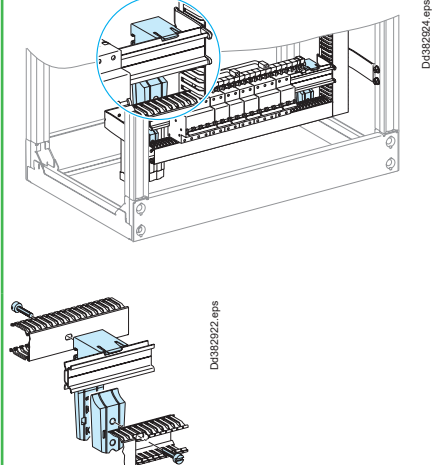
Trunking supports

| Type            | Horizontal trunking supports                                                       | Adaptable support for horizontal trunking                                                                                                                                                        |
|-----------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 |  |                                                                                                               |
| Catalog number  | <b>LVS04255</b>                                                                    | <b>LVS04256</b>                                                                                                                                                                                  |
| Characteristics | Set of 12                                                                          | Set of 10<br>Aligns the cover of a horizontal trunking section (H = 60 or 80 mm) with that of a vertical trunking section (H = 80 mm)<br><b>Note:</b> not designed for use with Pack enclosures. |

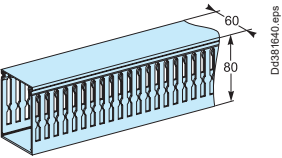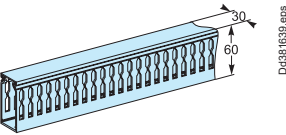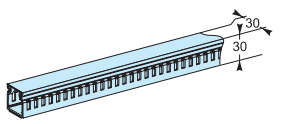Trunkings

| Type            | Vertical trunkings 80 x 60 mm                                                       | Horizontal trunkings 60 x 30 mm                                                      | Cable trunkings for doors 30 x 30 mm                                                  |
|-----------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                 |  |  |  |
| Catalog number  | <b>LVS04267</b>                                                                     | <b>LVS04257</b>                                                                      | <b>LVS04233</b>                                                                       |
| Characteristics | Set of 18<br>L = 2000 mm                                                            | Set of 4<br>L = 450 mm<br>Supplied with supports                                     | Set of 30 adhesive trunkings<br>30 x 30 mm<br>L = 2000                                |



Cable trunkings for doors, grommets


| Type            | Flexible trunkings for wiring to door                                               | Grommets                                                                             |
|-----------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                 |  |  |
| Catalog number  | <b>LVS04235</b>                                                                     | <b>LVS04234</b>                                                                      |
| Characteristics | W = 500 mm, inner Ø = 19 mm                                                         | Set of 10.<br>For wiring through front.                                              |
|                 |                                                                                     | <b>LVS01215</b>                                                                      |
|                 |                                                                                     | 5 square grommets 70 x 40.                                                           |
|                 |                                                                                     | <b>87648</b>                                                                         |
|                 |                                                                                     | 50 grommets Ø22 mm.                                                                  |





# Connection accessories
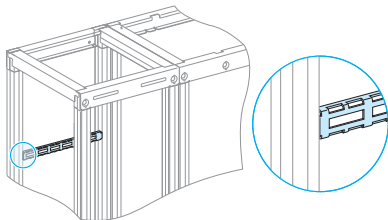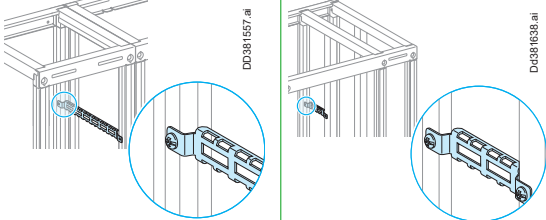
## Cable-tie supports, lateral and longitudinal cross-members

Others

| Mounting        | Longitudinal cable-tie supports                                                                                                                                             |                 |                 |                 | Lateral cable-tie supports                                                                  |                 |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|-----------------|---------------------------------------------------------------------------------------------|-----------------|
|                 |                                                                                            |                 |                 |                 |           |                 |
| Catalog number  | <b>LVS08773</b>                                                                                                                                                             | <b>LVS08774</b> | <b>LVS08776</b> | <b>LVS08778</b> | <b>LVS08794</b>                                                                             | <b>LVS08796</b> |
| Characteristics | W = 300 mm                                                                                                                                                                  | W = 400 mm      | W = 650 mm      | W = 800 mm      | D = 400 mm                                                                                  | D = 200 mm      |
|                 | Set of 4, supplied with the necessary hardware for connection to the framework. Cable-tie supports are used to correctly position the cables in the connection compartment. |                 |                 |                 | For frameworks that are 400 mm deep, assign a 400 mm deep support to a 200 mm deep support. |                 |



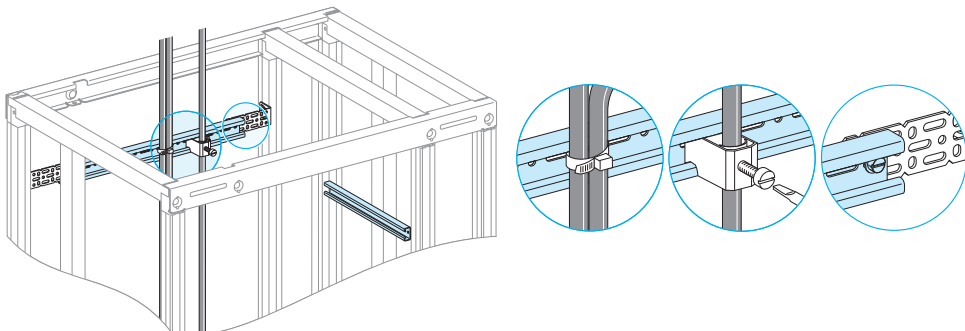
| Mounting        | C-shaped cable-tie supports                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 |                                                                                                                                                                                                                                                                                                                                                 |
| Catalog number  | <b>LVS08783</b>                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Characteristics | C-shaped 1600 mm long support, supplied with hardware for mounting on universal angle brackets and modular rails, that can be cut to length as needed.<br>Can be secured to:<br><ul style="list-style-type: none"> <li>■ universal angle bracket LVS03581 (for the longitudinal support)</li> <li>■ universal angle bracket LVS03582 (for the lateral support)</li> <li>■ modular rail LVS03593 (for depth adjustment).</li> </ul> |
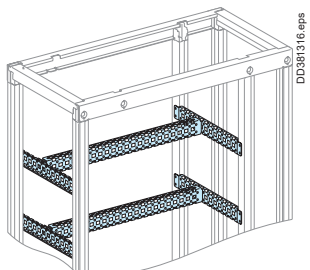
| Mounting                                                                            | Lateral cross-members                                                               |                                                                                                                                             | Longitudinal cross-members                                                                                                                  |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
|  |  |                                                         |                                                        |
| Catalog number                                                                      | <b>LVS03584</b>                                                                     | <b>LVS03586</b>                                                                                                                             | <b>LVS03587</b>                                                                                                                             |
| Characteristics                                                                     | Set of 2<br>W = 400 mm: for frameworks that are 400 mm deep                         | Set of 2<br>W = 200 mm: can be added to the 400 mm crossmembers for frameworks that are 600 mm deep. They can also be installed separately. | Set of 2<br>W = 650 mm<br>They are connected directly to the framework (W = 650 mm). They can also be mounted on the lateral cross-members. |
|                                                                                     | Metallics, they offer numerous positioning holes for easier installation.           |                                                                                                                                             |                                                                                                                                             |

## Door handles and locks


Others

## Handles and padlocking

|                 | EURO handle                                                                                   | ASSA/ABLOY handle                                                                             | RAL 7016 rotary handle                                                                             | Padlocking                                                                                             |
|-----------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
|                 |  Dd119386.ai |  Dd119387.ai |  mhz3131101_1.epa |  mhz3131101-p_2.epa |
| Cat. no.        | <b>LVS07932</b>                                                                               | <b>LVS07933</b>                                                                               | <b>LVS07931</b>                                                                                    | <b>LVS07938</b>                                                                                        |
| Characteristics | Supplied without barrel                                                                       | Supplied without barrel                                                                       | Supplied with barrel lock (key no. 405) RAL 7016                                                   | For new rotary handle                                                                                  |


## New Barrel locks and inserts

The barrel locks and inserts below can mount on all the door handles of PrismaSeT P range after removing the standard barrel lock (key n°405)".

| Rotary handle and inserts                                                                           |                                                                                                      |                 |
|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-----------------|
|                                                                                                     | Characteristics                                                                                      | Catalog numbers |
|  mhz3131101_1.epa |  1 key no. 405      | LVS07940        |
|                                                                                                     |  2 keys no. 455   | LVS07941        |
|                                                                                                     |  2 keys no. 1242E | LVS07942        |
|                                                                                                     |  2 keys no. 3113A | LVS07943        |
|                                                                                                     |  2 keys no. 2433A | LVS07944        |
|                                                                                                     |  2 keys no. 2432E | LVS07956        |
|                  | DIN double bar insert                                                                                | LVS07945        |
|                  | Screwdriver slot insert                                                                              | LVS07946        |
|                  | Male triangle insert 8 mm                                                                            | LVS07949        |
|                  | Male square insert 6 mm                                                                              | LVS07951        |
|                                                                                                     | 8 mm                                                                                                 | LVS07953        |

## Earthing braid


Earthing braid is used to earth a door or wicket door with devices.

|                 | Earthing braid, 6 mm <sup>2</sup>                                                                | Earthing wire, 6 mm <sup>2</sup>                                                                  |
|-----------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
|                 |  DD384368.epa |  DD384369.epa |
| Catalog numbers | <b>LVS08910</b>                                                                                  | <b>LVS08911</b>                                                                                   |
| Characteristics | Equipped with a 4 mm diameter lug at one end and a 6 mm diameter lug on the other. W = 200 mm.   | Equipped with a 5 mm diameter lug at one end and a 6 mm diameter lug on the other. W = 200 mm     |

## Ventilation accessories


## Panel installation

Others

| Front plate                  | Ventilated front plate                                                                                                                                     |                                   |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
|                              |                                                                           |                                   |
| Cat. no.                     | <b>LVS03891</b>                                                                                                                                            | <b>LVS03895</b>                   |
| Height                       | 1 vertical module,<br>H = 50 mm                                                                                                                            | 3 vertical modules,<br>H = 150 mm |
| Characteristics              | Degree of protection: IP30.<br>Located at the top and bottom of the switchboard, ventilated front plates facilitate natural convection in the switchboard. |                                   |
| Surface area of the openings | 80 cm <sup>2</sup>                                                                                                                                         | 250 cm <sup>2</sup>               |

| Forced-air ventilation                               | 38 m <sup>3</sup> /hr                                                             | 85 m <sup>3</sup> /hr                                                             | 165 m <sup>3</sup> /hr                                                            | 300 m <sup>3</sup> /hr                                                            | 560 m <sup>3</sup> /hr                                                              | 850 m <sup>3</sup> /hr                                                              |
|------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                      |  |  |  |  |  |  |
| Cat. no.                                             | <b>NSYCVF38M230PF</b>                                                             | <b>NSYCVF85M230PF</b>                                                             | <b>NSYCVF165M230PF</b>                                                            | <b>NSYCVF300M230PF</b>                                                            | <b>NSYCVF560M230PF</b>                                                              | <b>NSYCVF850M230PF</b>                                                              |
| Unimpeded throughput via filter (m <sup>3</sup> /hr) |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| 50 Hz                                                | 38                                                                                | 85                                                                                | 165                                                                               | 300                                                                               | 562                                                                                 | 838                                                                                 |
| 60 Hz                                                | 39                                                                                | 98                                                                                | 193                                                                               | 350                                                                               | 586                                                                                 | 803                                                                                 |
| Throughput via outlet grill (m <sup>3</sup> /hr)     |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| 50 Hz                                                | 25                                                                                | 63                                                                                | 153 (1)                                                                           | 260                                                                               | 473                                                                                 | 718                                                                                 |
| 60 Hz                                                | 26                                                                                | 72                                                                                | 171 (1)                                                                           | 307                                                                               | 477                                                                                 | 568                                                                                 |
| Power drawn (W)<br>(max. intensity (A))              | 4,5/4,8<br>(0,16/0,17)                                                            | 17/15<br>(0,121/0,097)                                                            | 16,3/14,3<br>(0,12/0,94)                                                          | 36/37<br>(0,171/0,16)                                                             | 68/85<br>(0,52/0,370)                                                               | 150/195<br>(0,65/0,85)                                                              |
| Noise level (dB (A))                                 | 40/41                                                                             | 46/49                                                                             | 50/51                                                                             | 55/56                                                                             | 59/59                                                                               | 76/75                                                                               |
| External dimensions<br>(cutting)                     | 137 x 117 x 49<br>(92 x 92)                                                       | 170 x 150 x 62<br>(125 x 125)                                                     | 268 x 248 x 104<br>(223 x 223)                                                    | 268 x 248 x 116<br>(223 x 223)                                                    | 336 x 316 x 161<br>(291 x 291)                                                      | 336 x 316 x 162<br>(291 x 291)                                                      |
| Weight (kg)                                          | 0,220                                                                             | 0,780                                                                             | 1,140                                                                             | 1,3                                                                               | 3,2                                                                                 | 4,1                                                                                 |
| Operating temperature                                | -10...+70 °C                                                                      | -20...+60 °C                                                                      | -20...+60 °C                                                                      | -10...+70 °C                                                                      | -15...+60 °C                                                                        | -15...+60 °C                                                                        |

| Outlet grill |                   |                    |                    |                    |                    |                    |
|--------------|-------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Cat. no.     | <b>NSYAG92LPF</b> | <b>NSYAG125LPF</b> | <b>NSYAG223LPF</b> | <b>NSYAG223LPF</b> | <b>NSYAG291LPF</b> | <b>NSYAG291LPF</b> |

| Filters for outlet grill |                                                                                     |                   |                   |                   |                   |                   |
|--------------------------|-------------------------------------------------------------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|                          |  |                   |                   |                   |                   |                   |
| G2 M1 standard filters   | <b>NSYCAF92</b>                                                                     | <b>NSYCAF125</b>  | <b>NSYCAF223</b>  | <b>NSYCAF223</b>  | <b>NSYCAF291</b>  | <b>NSYCAF291</b>  |
| G3 M1 fine filters       | -                                                                                   | <b>NSYCAF125T</b> | <b>NSYCAF223T</b> | <b>NSYCAF223T</b> | <b>NSYCAF291T</b> | <b>NSYCAF291T</b> |
| Characteristics          | Set of 5 (for replacement)<br>Synthetic filters                                     |                   |                   |                   |                   |                   |




| EMC cover |   |                    |                    |                    |                    |                    |
|-----------|---|--------------------|--------------------|--------------------|--------------------|--------------------|
| Cat. no.  | - | <b>NSYCAP125LE</b> | <b>NSYCAP223LE</b> | <b>NSYCAP223LE</b> | <b>NSYCAP291LE</b> | <b>NSYCAP291LE</b> |

(1) For 2 outlet grills 161 (50 Hz) / 175 (60 Hz).




**Nota :** For other usage voltage like 50V or 110V, see Universal Enclosures catalog, cat. no. UE12MK01EN.

### Dimensions




#### NSYCVF38M230PF






#### NSYCVF85M230PF

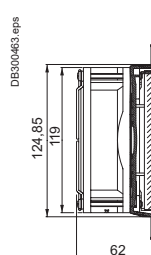




#### NSYCVF165M230PF

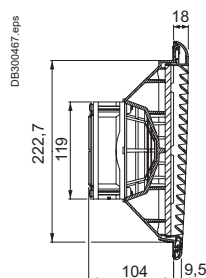

#### NSYCVF300M230PF



#### NSYCVF560M230PF - NSYCVF850M230PF





| A   | B     | Cat. no.        |
|-----|-------|-----------------|
| 225 | 160.5 | NSYCVF560M230PF |
| 280 | 192   | NSYCVF850M230PF |



## Ventilation accessories

## Roof installation

Others

| Roof ventilation                                        |                                                                                                                                                                                                                                                                                                                                                                                                            | Width 650, IP31                                                                              |             | Width 800, IP54                                                                               |  |
|---------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------------------|--|
|                                                         |                                                                                                                                                                                                                                                                                                                                                                                                            | <div></div> |             | <div></div> |  |
| Roof with a cut-out                                     | D = 400 mm                                                                                                                                                                                                                                                                                                                                                                                                 | D = 600 mm                                                                                   | D = 400 mm  | D = 600 mm                                                                                    |  |
| Catalog numbers                                         | LVS08476                                                                                                                                                                                                                                                                                                                                                                                                   | LVS08676                                                                                     | LVS08478    | LVS08678                                                                                      |  |
| Characteristics                                         | IP31                                                                                                                                                                                                                                                                                                                                                                                                       | IP31                                                                                         | IP54        | IP54                                                                                          |  |
| Forced ventilation top hood with fan                    |                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                              |             |                                                                                               |  |
| Catalog numbers                                         | NSYCVF575M230MB                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                              |             |                                                                                               |  |
| Characteristics                                         | <b>Fan characteristics</b> <ul style="list-style-type: none"><li>■ Power: 85 W</li><li>■ Input voltage: 230 V</li><li>■ Throughput via outlet grill :<ul style="list-style-type: none"><li>□ with 1 outlet grill: 350 m³/hr</li><li>□ Free with filter: 575 m³/hr</li></ul></li><li>□ Finishing parts: painted with epoxy-polyester resin, textured RAL 9003 white</li><li>■ Noise level: 64 dB.</li></ul> |                                                                                              |             |                                                                                               |  |
| Natural ventilation top hood without fan                |                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                              |             |                                                                                               |  |
| Catalog numbers                                         | NSYCAC228RMB                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                              |             |                                                                                               |  |
| Characteristics                                         | <ul style="list-style-type: none"><li>■ Material: steel</li><li>■ Finishing parts: painted with epoxy-polyester resin, textured RAL 9003 white</li><li>■ IP54</li><li>■ Fixing to the top by means of caged nuts and special screws</li></ul>                                                                                                                                                              |                                                                                              |             |                                                                                               |  |
| Air-flow cross section = 304 cm² without electrical fan |                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                              | 2 x 304 cm² |                                                                                               |  |

## Ventilation accessories

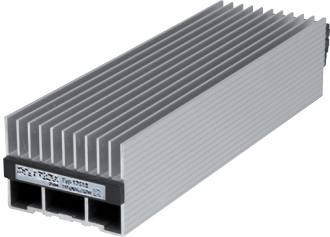
## Heat

## Others

## Resistors

Resistors prevent condensation, corrosion and superficial leakage currents. They maintain a positive temperature in the enclosures and cubicles when external temperatures drop very low.

- Install heaters according to the desired power level at the bottom of the enclosure
- Respect a safety area of a least 10 cm around the device
- The heaters must be installed with a thermal controller to control the temperature or the humidity inside the enclosure.
- The enclosure must be sealed to prevent the entry of air from the outside.
- An electrical protection device must be installed on the supply side of the unit.
- Surface temperature limited to 75 °C when the ambient temperature is -5 °C.
- Heaters equipped with a power cable with a length of 500 mm with silicon insulation, or with a connection terminal block.

|                  | Aluminium PTC resistors                                                                                                                                                                                                                                                                                                   |            |                |             |             | Resistive heaters with fan                                                                                                                                                                                                                                                                                                |                |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------------|-------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
|                  |                                                                                                                                                                                                                                          |            |                |             |             |                                                                                                                                                                                                                                        |                |
|                  | Power cord                                                                                                                                                                                                                                                                                                                |            | Terminal block |             |             | Terminal block                                                                                                                                                                                                                                                                                                            |                |
| Cat. no.         | NSYCR10WU2                                                                                                                                                                                                                                                                                                                | NSYCR20WU2 | NSYCR55WU2     | NSYCR100WU2 | NSYCR150WU2 | NSYCR250W230VV                                                                                                                                                                                                                                                                                                            | NSYCR400W230VV |
| Power rating (W) | 10                                                                                                                                                                                                                                                                                                                        | 25         | 55             | 90          | 150         | 250                                                                                                                                                                                                                                                                                                                       | 400            |
| Voltage (V)      | 110-250 AC                                                                                                                                                                                                                                                                                                                | 110-250 AC | 110-250 AC     | 110-250 AC  | 110-250 AC  | 230 AC                                                                                                                                                                                                                                                                                                                    | 230 AC         |
| Characteristics  | <ul style="list-style-type: none"> <li>■ Vertical mounting.</li> <li>■ Aluminium case with fins.</li> <li>■ Temperature: <ul style="list-style-type: none"> <li>□ turns off at 60 °C,</li> <li>□ turns on at 25-30 °C (temperature of the resistor itself).</li> </ul> </li> <li>■ Equipped with a symmetrical</li> </ul> |            |                |             |             | <ul style="list-style-type: none"> <li>■ Vertical mounting.</li> <li>■ Aluminium case with fins.</li> <li>■ Temperature: <ul style="list-style-type: none"> <li>□ turns off at 60 °C,</li> <li>□ turns on at 25-30 °C (temperature of the resistor itself).</li> </ul> </li> <li>■ Equipped with a symmetrical</li> </ul> |                |

## Thermofan

|                  | Thermofan                                                                                                                                                                                                                                                                               |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                  |                                                                                                                                                                                                      |
|                  | Terminal block                                                                                                                                                                                                                                                                          |
| Cat. no.         | NSYCRP1W230VTVC                                                                                                                                                                                                                                                                         |
| Power rating (W) | 400/550                                                                                                                                                                                                                                                                                 |
| Voltage (V)      | 230 AC                                                                                                                                                                                                                                                                                  |
| Characteristics  | <ul style="list-style-type: none"> <li>■ Combination of a resistance heater and an axial motor to ensure uniform heating of the enclosure.</li> <li>■ Fixing by clip on a DIN rail.</li> <li>■ Thermostat adjustable from 0...+60 °C.</li> <li>■ Visual operation indicator.</li> </ul> |

## Ventilation accessories



## Regulating

## Others

## Regulating

The thermostat can control the temperature inside electrical switchboards in conjunction with heating resistors and fans.

This thermostat can control the activation of a fan and a heater and regulate their temperature independently.



|                                               | Mechanical thermostats                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                             | Electronical thermostats                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                               |                                                                                 |
|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
|                                               |                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                |                                                                                                               |                                                                                 |
|                                               | <b>Thermostat with OF contact</b><br><b>NSYCCOTHI</b>                                                                                                                                                                                                                                                                                                                                                                            | <b>Double thermostat</b><br><b>NSYCCOTHD</b>                                                                                                                                                                                                | <b>Electronical thermostat</b><br><b>NSYCCOTH230VID</b>                                                                                                                                                                                                                                                                                                                                                                                         | <b>Electronic hygrotherm</b><br><b>NSYCCOHYT230VID</b>                                                        | <b>Electronic hygrostat</b><br><b>NSYCCOHY230VID</b>                            |
| Cat. no.                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                               |                                                                                 |
| Colour of the button                          | Black                                                                                                                                                                                                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>■ Red: with normally closed contact (NC) for controlling the resistance heaters.</li> <li>■ Blue: with normally open contact (NO) for controlling the fans, signalling systems or alarms.</li> </ul> | -                                                                                                                                                                                                                                                                                                                                                                                                                                               | -                                                                                                             | -                                                                               |
| Contact                                       | Inverse, forced rupture                                                                                                                                                                                                                                                                                                                                                                                                          | 1 with normally closed contact (NC),<br>1 with normally open contact (NO),<br>forced rupture                                                                                                                                                | Free with zero potential                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                               |                                                                                 |
| Internal sensor element                       | Bimetal                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                             | Internal temperature sensor                                                                                                                                                                                                                                                                                                                                                                                                                     | -                                                                                                             | Internal humidity sensor                                                        |
| Switching capacity                            | 250 V AC ; 10 A (resistive load)                                                                                                                                                                                                                                                                                                                                                                                                 | 250 V AC ; 10 A<br>120 V AC ; 15 A<br>250 V AC/120 V AC : 2 A<br>(inductive load cos Ø = 0,6)<br>30 W DC                                                                                                                                    | -                                                                                                                                                                                                                                                                                                                                                                                                                                               | -                                                                                                             | -                                                                               |
| Max interrupting capacity with direct current | 250 V AC 4 A<br>(charge inductive Ø = 0,6)<br>30 W DC                                                                                                                                                                                                                                                                                                                                                                            | -                                                                                                                                                                                                                                           | -                                                                                                                                                                                                                                                                                                                                                                                                                                               | -                                                                                                             | -                                                                               |
| Connection                                    | Four 2.5 mm <sup>2</sup> terminals                                                                                                                                                                                                                                                                                                                                                                                               | Six 2.5 mm <sup>2</sup> terminals                                                                                                                                                                                                           | 2 x 2.5 mm <sup>2</sup> (input voltage)<br>+ 2 relays (2 x 2.5 mm <sup>2</sup><br>+ 2 x 2.5 mm <sup>2</sup> )                                                                                                                                                                                                                                                                                                                                   | 2 x 2.5 mm <sup>2</sup> (input voltage)<br>+ 2 relays (2 x 2.5 mm <sup>2</sup><br>+ 2 x 2.5 mm <sup>2</sup> ) | 2 x 2.5 mm <sup>2</sup> (input voltage)<br>+ 1 relay (2 x 2.5 mm <sup>2</sup> ) |
| Dimensions (mm)                               | 67 x 50 x 44                                                                                                                                                                                                                                                                                                                                                                                                                     | 60 x 33 x 43                                                                                                                                                                                                                                | -                                                                                                                                                                                                                                                                                                                                                                                                                                               | -                                                                                                             | -                                                                               |
| Weight (g)                                    | 100                                                                                                                                                                                                                                                                                                                                                                                                                              | 40                                                                                                                                                                                                                                          | -                                                                                                                                                                                                                                                                                                                                                                                                                                               | -                                                                                                             | -                                                                               |
| Hysteresis                                    | 7° K                                                                                                                                                                                                                                                                                                                                                                                                                             | 7° K                                                                                                                                                                                                                                        | Programmed 2 °K                                                                                                                                                                                                                                                                                                                                                                                                                                 | 3 %                                                                                                           | 3 %                                                                             |
| Temperature setting range                     | +5...+60 °C                                                                                                                                                                                                                                                                                                                                                                                                                      | 0...+60 °C                                                                                                                                                                                                                                  | -40 °C...+80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                 | -40 °C...+80 °C                                                                                               | -40 °C...+80 °C, humidity setting range:20 %...80 %                             |
| Characteristics                               | <ul style="list-style-type: none"> <li>■ Ingress protection rating: IP20.</li> <li>■ Contact resistance: &lt; 10 mΩ.</li> <li>■ Service life: &gt; 100 000 cycles.</li> <li>■ Fixing: by clip on a 35-mm DIN rail</li> <li>■ Case : plastic UL 94 V-0, light grey.</li> <li>■ Operating temperature : -20...+80 °C (-4...+176 °F).</li> <li>■ Display : °C/°F.</li> <li>■ Max. command intensity: (NC) 5 A (NO) 10 A.</li> </ul> |                                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>■ Ingress protection rating: IP20.</li> <li>■ Certification : UL/UR.</li> <li>■ Fixing: 4 different methods: on DIN rail, Spacial SF profile, on VDI cross-rail or on mounting plate</li> <li>■ Boîtier : plastique UL 94 V-0, gris clair.</li> <li>■ Operating temperature : -40 °C...+80 °C.</li> <li>■ Display : °C/°F.</li> <li>■ Max. command intensity: 8 (5) A 230 V AC / 5 A 30 V DC.</li> </ul> |                                                                                                               |                                                                                 |

| PTC external temperature sensor (double insulation) |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Cat. no.                                            | <b>NSYCCASTE</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Characteristics                                     | <ul style="list-style-type: none"> <li>■ Sensor operation or reading range: -30 °C...+80 °C.</li> <li>■ IP67.</li> <li>■ Thermostat installation tips: the thermostat should be installed at the top of the enclosure (the hottest place). See the various operating modes of each thermostat to choose the one that best meets your needs.</li> <li>■ Hygrostat installation tips: the hygrostat should be installed at the bottom of the enclosure. 60 % RH is the optimum value in the enclosure.</li> </ul> |


## Thermal management of switchboards
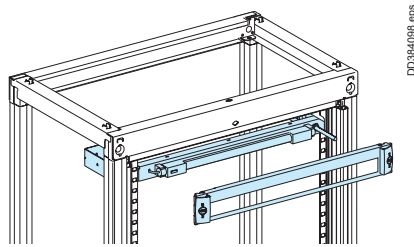
> page C-9.

## Lighting system

| Fixed lighting                                                                    |                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  |                                                                                                                                                                                                                                                      |
|                                                                                   | <b>Catalog number</b> LVS08964                                                                                                                                                                                                                                                                                                        |
|                                                                                   | <b>Presentation</b> This system is generally used to illuminate the front of a switchboard. <ul style="list-style-type: none"> <li>■ The kit is made up of: <ul style="list-style-type: none"> <li>□ a base</li> <li>□ a neon tube</li> <li>□ a front plate with cut-out (1 module)</li> <li>□ a door contact.</li> </ul> </li> </ul> |
|                                                                                   | <b>Characteristics</b> <ul style="list-style-type: none"> <li>■ Supply voltage: 220/240 V</li> <li>■ Power rating: 8 W</li> <li>■ Height: 1 vertical module (50 mm)</li> </ul>                                                                                                                                                        |

## Switchboard portable lamp

| Switchboard portable lamp                                                           |                                                                                                                                                                                                                                                      |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  |                                                                                                                                                                                                                                                      |
|                                                                                     | <b>Catalog number</b> LVS08965                                                                                                                                                                                                                       |
|                                                                                     | <b>Presentation</b> <ul style="list-style-type: none"> <li>■ Lamp with a magnetic base for installation behind a door or directly on the cubicle framework.</li> <li>■ Supplied without a power cord.</li> <li>■ H x W x D: 90 x 345 x 42</li> </ul> |
|                                                                                     | <b>Characteristics</b> <ul style="list-style-type: none"> <li>■ Supply voltage: 220/240 V</li> <li>■ Power rating: 11 W</li> <li>■ Lamp: picoline OSRAM 8W (supplied)</li> <li>■ Class 2</li> <li>■ IP20</li> </ul>                                  |

# Lineryg distribution systems

## Contents

## Power busbars

|                                                         |      |
|---------------------------------------------------------|------|
| <b>Linergy LGYE</b><br>Horizontal profiles up to 4000 A | G-2  |
| <b>Linergy BS</b><br>Horizontal busbars up to 4000 A    | G-3  |
| <b>Linergy LGY</b><br>Lateral profiles up to 3200 A     | G-4  |
| <b>Linergy LGYE</b><br>Lateral profiles up to 4000 A    | G-5  |
| <b>Linergy BS</b><br>Lateral flat busbars up to 4000 A  | G-6  |
| <b>Linergy LGY</b><br>Rear profiles up to 1600 A        | G-7  |
| <b>Linergy BS</b><br>Rear busbars up to 1600 A          | G-8  |
| <b>Linergy BS</b><br>Rear busbars up to 630 A           | G-9  |
| Multi-stage busbars up to 630 A                         | G-10 |
| Multi-stage distribution block up to 630 A              | G-11 |
| Incomer accessories up to 630 A                         | G-12 |
| <b>Linergy Busbars</b><br>Accessories                   | G-13 |
| <b>Linergy BW</b><br>Insulated busbars up to 630 A      | G-14 |

## Distribution blocks

|                                                                                      |      |
|--------------------------------------------------------------------------------------|------|
| <b>Linergy DP</b><br>Quick distribution blocks - ComPacT NSX and INS-INV up to 250 A | G-16 |
| Quick distribution blocks - ComPacT NSXm up to 160 A                                 | G-17 |

## Device feeders

|                                                                      |      |
|----------------------------------------------------------------------|------|
| <b>Linergy FC</b><br>Feeders for ComPacT NSX and INS-INV up to 250 A | G-18 |
| Feeders for ComPacT NSXm up to 160 A                                 | G-20 |

## Secondary distribution

|                                |      |
|--------------------------------|------|
| <b>Insulated flexible bars</b> | G-22 |
|--------------------------------|------|

## Distribution blocks

|                                                |      |
|------------------------------------------------|------|
| <b>Linergy DX</b><br>Quick distribution blocks | G-24 |
|------------------------------------------------|------|

## Device feeders

|                                           |      |
|-------------------------------------------|------|
| <b>Linergy FM</b><br>Quick device feeders | G-26 |
|-------------------------------------------|------|

## Distribution blocks

|                                                |      |
|------------------------------------------------|------|
| <b>Linergy DS</b><br>Screw distribution blocks | G-28 |
|------------------------------------------------|------|

## Device feeders

|                                                                  |      |
|------------------------------------------------------------------|------|
| <b>Linergy FH</b><br>Comb busbar for 27 mm pitch for C120, NG125 | G-30 |
| Comb busbar for 18 mm pitch for Acti 9                           | G-32 |
| Comb busbar for 9 mm pitch for Acti 9, C60                       | G-33 |
| Comb busbar for 9 mm pitch for Acti 9                            | G-34 |
| Horizontal comb busbar for 18 mm pitch for Domae                 | G-35 |
| Horizontal biconnect comb busbar for 18 mm pitch                 | G-36 |

## Terminal blocks and lines

|                                            |      |
|--------------------------------------------|------|
| <b>Linergy TA</b><br>Auxiliary connections | G-37 |
| <b>Linergy TB</b><br>Earth bars            | G-38 |
| PE conductor                               | G-39 |

## Secondary distribution

|                                          |      |
|------------------------------------------|------|
| <b>Linergy TB terminal block support</b> | G-40 |
|------------------------------------------|------|

## Electrical characteristics

|                                                              |      |
|--------------------------------------------------------------|------|
| <b>Designing connection ≤ 630 A</b><br>Auxiliary connections | G-41 |
| <b>Linergy TR</b><br>Terminal blocks                         | G-42 |






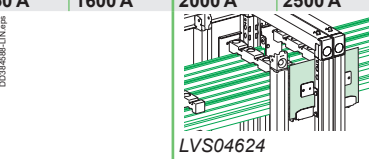


## LinerGY LGYE

Horizontal profiles up to 4000 A

400 mm deep installation

Power busbars

| LinerGY LGYE profiles                                                                           |                                                           |                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                     |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Installation                                                                                    |                                                           | Up to 1600 A                                                                                                                                                                                                                                                                                                                                                                     |                                                                                     |                                                                                   |                                                                                   |                                                                                   | Up to 2500 A                                                                         |                                                                                    | Up to 4000 A                                                                        |                                                                                     |
| LinerGY profiles, 2000 mm length                                                                |                                                           |                                                                                                                                                                                                                                                                                                 |    |  |  |  |     |  |  |  |
|                                                                                                 |                                                           | 630 A                                                                                                                                                                                                                                                                                                                                                                            | 800 A                                                                               | 1000 A                                                                            | 1250 A                                                                            | 1600 A                                                                            | 2000 A                                                                               | 2500 A                                                                             | 3200 A                                                                              | 4000 A                                                                              |
| Permissible current for an ambient temperature of 35 °C around the switchboard                  | IP ≤ 31                                                   | 630 A                                                                                                                                                                                                                                                                                                                                                                            | 800 A                                                                               | 1000 A                                                                            | 1250 A                                                                            | 1650 A                                                                            | 2000 A                                                                               | 2440 A                                                                             | 3200 A                                                                              | 3620                                                                                |
|                                                                                                 | IP > 31                                                   | 530 A                                                                                                                                                                                                                                                                                                                                                                            | 680 A                                                                               | 850 A                                                                             | 1050 A                                                                            | 1480 A                                                                            | 1650 A                                                                               | 2100 A                                                                             | 2800 A                                                                              | 3350                                                                                |
| Number of profiles per phase                                                                    |                                                           | 1                                                                                                                                                                                                                                                                                                                                                                                |                                                                                     |                                                                                   |                                                                                   |                                                                                   | 3                                                                                    |                                                                                    | 4                                                                                   |                                                                                     |
| Total number of vertical modules (50 mm)                                                        |                                                           | 3                                                                                                                                                                                                                                                                                                                                                                                |                                                                                     |                                                                                   |                                                                                   |                                                                                   | 3                                                                                    |                                                                                    | 4                                                                                   |                                                                                     |
| Catalog numbers                                                                                 |                                                           | LVS04560                                                                                                                                                                                                                                                                                                                                                                         | LVS04561                                                                            | LVS04562                                                                          | LVS04563                                                                          | LVS04564                                                                          | LVS04565                                                                             | LVS04566                                                                           | LVS04567                                                                            | LVS04568                                                                            |
| Busbar supports                                                                                 |                                                           |                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                     |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                |                                                           |                                                                                                                                                                                                                                                                                                 |                                                                                     |  |                                                                                   |  |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           | Fixed support LVS04664                                                                                                                                                                                                                                                                                                                                                           |                                                                                     | Free support LVS04662                                                             |                                                                                   | Fixed support LVS04665                                                            |                                                                                      | Free support LVS04678                                                              |                                                                                     |                                                                                     |
| Characteristics                                                                                 |                                                           | Two fixed supports for 650 mm or 650 + 150 mm wide PrismaSeT P Active frameworks and one fixed support for 300/400 mm wide PrismaSeT P Active frameworks are mandatory. If more supports are required, use free supports.<br><b>Note:</b> in case of 600 mm depth with 115 mm between centers, replace LVS04664 fixed support by LVS04665 and LVS04662 free support by LVS04678. |                                                                                     |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
| In cubicle<br>W = 650 or<br>W =<br>650+150<br>busbar<br>supports<br>75 mm<br>between<br>centres | Number of<br>supports<br>depending on<br>lcw (kA rms/1 s) | ≤ 15                                                                                                                                                                                                                                                                                                                                                                             | 2                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           | ≤ 25                                                                                                                                                                                                                                                                                                                                                                             | 2                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           | ≤ 30                                                                                                                                                                                                                                                                                                                                                                             | 2                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           | ≤ 40                                                                                                                                                                                                                                                                                                                                                                             | 2                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           | ≤ 50                                                                                                                                                                                                                                                                                                                                                                             | 2                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           | ≤ 60                                                                                                                                                                                                                                                                                                                                                                             | 2+1                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           | ≤ 65                                                                                                                                                                                                                                                                                                                                                                             | 2+1                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           | ≤ 75                                                                                                                                                                                                                                                                                                                                                                             | 2+1                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           | ≤ 85                                                                                                                                                                                                                                                                                                                                                                             | 2+1                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           | ≤ 100                                                                                                                                                                                                                                                                                                                                                                            | 2+2                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
| Catalog numbers                                                                                 |                                                           | Fixed support                                                                                                                                                                                                                                                                                                                                                                    | LVS04664                                                                            |                                                                                   |                                                                                   |                                                                                   | LVS04664 + LVS04671 (1) (hardware)                                                   |                                                                                    | LVS04664 + LVS04646 (2) (hardware)                                                  |                                                                                     |
|                                                                                                 |                                                           | Free support                                                                                                                                                                                                                                                                                                                                                                     | LVS04662                                                                            |                                                                                   |                                                                                   |                                                                                   | LVS04662 + LVS04671 (1) (hardware)                                                   |                                                                                    | LVS04662 + LVS04646 (2) (hardware)                                                  |                                                                                     |
| In duct<br>W = 300<br>busbar<br>supports<br>75 mm<br>between<br>centres                         | Number of<br>supports<br>depending on<br>lcw (kA rms/1 s) | ≤ 60                                                                                                                                                                                                                                                                                                                                                                             | 1                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           | ≤ 85                                                                                                                                                                                                                                                                                                                                                                             | 1 + 1                                                                               |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           | ≤ 100                                                                                                                                                                                                                                                                                                                                                                            | 1 + 1                                                                               |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           |                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                     |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
| Catalog numbers                                                                                 |                                                           | Fixed support                                                                                                                                                                                                                                                                                                                                                                    | LVS04664                                                                            |                                                                                   |                                                                                   |                                                                                   | LVS04664 + LVS04671 (1) (hardware)                                                   |                                                                                    | LVS04664 + LVS04646 (2) (hardware)                                                  |                                                                                     |
|                                                                                                 |                                                           | Free support                                                                                                                                                                                                                                                                                                                                                                     | LVS04662                                                                            |                                                                                   |                                                                                   |                                                                                   | LVS04662 + LVS04671 (1) (hardware)                                                   |                                                                                    | LVS04662 + LVS04646 (2) (hardware)                                                  |                                                                                     |
| In duct<br>W = 400<br>busbar<br>supports<br>75 mm<br>between<br>centres                         | Number of<br>supports<br>depending on<br>lcw (kA rms/1 s) | ≤ 50                                                                                                                                                                                                                                                                                                                                                                             | 1                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           | ≤ 85                                                                                                                                                                                                                                                                                                                                                                             | 1 + 1                                                                               |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           | ≤ 100                                                                                                                                                                                                                                                                                                                                                                            | 1 + 1                                                                               |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           |                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                     |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
| Catalog numbers                                                                                 |                                                           | Fixed support                                                                                                                                                                                                                                                                                                                                                                    | LVS04664                                                                            |                                                                                   |                                                                                   |                                                                                   | LVS04664 + LVS04671 (1) (hardware)                                                   |                                                                                    | LVS04664 + LVS04646 (2) (hardware)                                                  |                                                                                     |
|                                                                                                 |                                                           | Free support                                                                                                                                                                                                                                                                                                                                                                     | LVS04662                                                                            |                                                                                   |                                                                                   |                                                                                   | LVS04662 + LVS04671 (1) (hardware)                                                   |                                                                                    | LVS04662 + LVS04646 (2) (hardware)                                                  |                                                                                     |
| Joints                                                                                          |                                                           |                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                     |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |
|                                                                                                 |                                                           | Up to 1600 A                                                                                                                                                                                                                                                                                                                                                                     |                                                                                     |                                                                                   |                                                                                   |                                                                                   | Up to 2500 A                                                                         |                                                                                    | Up to 4000 A                                                                        |                                                                                     |
|                                                                                                 |                                                           | 630 A                                                                                                                                                                                                                                                                                                                                                                            | 800 A                                                                               | 1000 A                                                                            | 1250 A                                                                            | 1600 A                                                                            | 2000 A                                                                               | 2500 A                                                                             | 3200 A                                                                              | 4000 A                                                                              |
|                                                                                                 |                                                           |                                                                                                                                                                                                                                                                                               |  |                                                                                   |                                                                                   |                                                                                   |  |                                                                                    |                                                                                     |                                                                                     |
| Catalog numbers                                                                                 |                                                           | 3 x LVS04620 (3P)<br>4 x LVS04620 + LVS04624 (4P)                                                                                                                                                                                                                                                                                                                                |                                                                                     |                                                                                   |                                                                                   |                                                                                   | 3 x LVS04621 (3P)<br>4 x LVS04621 + LVS04624 (4P)                                    |                                                                                    | 3 x LVS04623 (3P)<br>4 x LVS04623 + LVS04624 (4P)                                   |                                                                                     |
| Note                                                                                            |                                                           | LVS04624 is mandatory in case of jointed 4P Linergy LGYE busbars installations and must be installed only at the junction on side-by-side frameworks combination. When installed at the bottom of cubicles, the busbars must be partitioned.                                                                                                                                     |                                                                                     |                                                                                   |                                                                                   |                                                                                   |                                                                                      |                                                                                    |                                                                                     |                                                                                     |

(1) LVS04671: mounting hardware for bars or profile H = 100 or 120 mm. Contains 2 threaded rods and 4 insulators.

(2) LVS04646: mounting hardware for bars or profile H = 150 mm. Contains 2 threaded rods and 2 insulators.

**Note:** for accessories > page G-13.



## Linerger BS

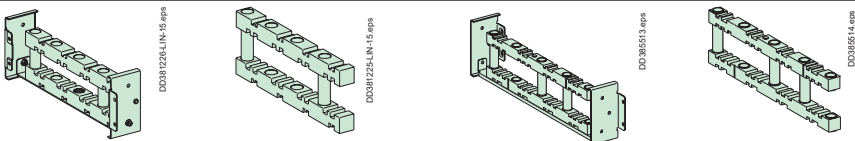Horizontal busbars up to 4000 A

400 mm deep installation

Power busbars

| Flat bars                                                                      |         |              |          |          |          |              |          |          |          |          |          |          |
|--------------------------------------------------------------------------------|---------|--------------|----------|----------|----------|--------------|----------|----------|----------|----------|----------|----------|
| Installation                                                                   |         | Up to 1600 A |          |          |          | Up to 4000 A |          |          |          |          |          |          |
| Copper without holes, 2000 mm length                                           |         |              |          |          |          |              |          |          |          |          |          |          |
| Permissible current for an ambient temperature of 35 °C around the switchboard | IP ≤ 31 | 800 A        | 1000 A   | 1400 A   | 1800 A   | 1200 A       | 1400 A   | 1800 A   | 2050 A   | 2300 A   | 2820 A   | 3300 A   |
|                                                                                | IP > 31 | 750 A        | 900 A    | 1250 A   | 1600 A   | 1080 A       | 1250 A   | 1600 A   | 1850 A   | 2000 A   | 2500 A   | 2900 A   |
| Size of bars (mm)                                                              |         | 60 x 5       | 80 x 5   | 60 x 5   | 80 x 5   | 50 x 10      | 60 x 10  | 80 x 10  | 50 x 10  | 60 x 10  | 80 x 10  | 100 x 10 |
| Number of bars per phase                                                       |         | 1            | 1        | 2        | 2        | 1            | 1        | 1        | 2        | 2        | 2        | 2        |
| Total number of vertical modules (50 mm)                                       |         | 3            |          |          |          |              |          |          |          |          |          | 4        |
| Catalog numbers                                                                |         | LVS04536     | LVS04538 | LVS04536 | LVS04538 | LVS04545     | LVS04546 | LVS04548 | LVS04545 | LVS04546 | LVS04548 | LVS04550 |

| Busbar supports                                                                           |                 |               |                                                                                    |      |                                                                                                                                                                                                                                                                                                                                                                                          |                 |                                              |                                              |                              |     |                                              |  |
|-------------------------------------------------------------------------------------------|-----------------|---------------|------------------------------------------------------------------------------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------------------------------|----------------------------------------------|------------------------------|-----|----------------------------------------------|--|
|          |                 |               |  |      |                                                                                                                                                                                                                                                                                                                                                                                          |                 |                                              |                                              |                              |     |                                              |  |
|                                                                                           |                 |               | Fixed support <b>LVS04664</b>                                                      |      | Free support <b>LVS04662</b>                                                                                                                                                                                                                                                                                                                                                             |                 | Fixed support <b>LVS04665</b>                |                                              | Free support <b>LVS04678</b> |     |                                              |  |
| In cubicle<br>W = 650 or<br>W = 650+150<br>busbar<br>supports<br>75 mm between<br>centres |                 |               | Characteristics                                                                    |      | Two fixed supports for 650 mm, 650 + 150 mm wide frameworks and one fixed support for 300/400 mm wide PrismaSeT P Active frameworks are mandatory. If more supports are required, use free supports.<br><b>Note:</b> in case of 600 mm depth with 115 mm between centers, replace <b>LVS04664</b> fixed support by <b>LVS04665</b> and <b>LVS04662</b> free support by <b>LVS04678</b> . |                 |                                              |                                              |                              |     |                                              |  |
| Number of supports<br>depending on lcw<br>(kA rms/1 s)                                    |                 |               | ≤ 15                                                                               | 2    |                                                                                                                                                                                                                                                                                                                                                                                          |                 |                                              |                                              |                              |     |                                              |  |
|                                                                                           |                 |               | ≤ 25                                                                               | 2+1  | 2                                                                                                                                                                                                                                                                                                                                                                                        |                 |                                              |                                              |                              |     |                                              |  |
|                                                                                           |                 |               | ≤ 30                                                                               | 2+1  | 2                                                                                                                                                                                                                                                                                                                                                                                        |                 |                                              |                                              |                              |     |                                              |  |
|                                                                                           |                 |               | ≤ 40                                                                               | 2+1  |                                                                                                                                                                                                                                                                                                                                                                                          |                 |                                              |                                              |                              |     |                                              |  |
|                                                                                           |                 |               | ≤ 50                                                                               | -    | 2+1                                                                                                                                                                                                                                                                                                                                                                                      |                 |                                              |                                              |                              | 2   |                                              |  |
|                                                                                           |                 |               | ≤ 60                                                                               | -    |                                                                                                                                                                                                                                                                                                                                                                                          |                 |                                              |                                              | 2+1                          |     |                                              |  |
|                                                                                           |                 |               | ≤ 65                                                                               | -    |                                                                                                                                                                                                                                                                                                                                                                                          |                 |                                              |                                              | 2+1                          |     |                                              |  |
|                                                                                           |                 |               | ≤ 75                                                                               | -    |                                                                                                                                                                                                                                                                                                                                                                                          |                 |                                              |                                              | 2+2                          | 2+1 |                                              |  |
|                                                                                           |                 |               | ≤ 85                                                                               | -    |                                                                                                                                                                                                                                                                                                                                                                                          |                 |                                              |                                              | -                            | 2+1 |                                              |  |
|                                                                                           |                 |               | Catalog numbers                                                                    |      | Fixed support                                                                                                                                                                                                                                                                                                                                                                            | <b>LVS04664</b> |                                              |                                              | <b>LVS04664</b>              |     | <b>LVS04664 + LVS04671 (1)</b><br>(hardware) |  |
| Free support                                                                              | <b>LVS04662</b> |               |                                                                                    |      | <b>LVS04662</b>                                                                                                                                                                                                                                                                                                                                                                          |                 | <b>LVS04662 + LVS04671 (1)</b><br>(hardware) |                                              |                              |     |                                              |  |
| In duct<br>W = 300<br>busbar<br>supports<br>75 mm between<br>centres                      |                 |               | Number of supports<br>depending on lcw<br>(kA rms/1 s)                             | ≤ 30 | 1                                                                                                                                                                                                                                                                                                                                                                                        |                 |                                              |                                              |                              |     |                                              |  |
|                                                                                           |                 |               |                                                                                    | ≤ 50 | 1 + 1                                                                                                                                                                                                                                                                                                                                                                                    |                 | 1                                            |                                              |                              |     |                                              |  |
|                                                                                           |                 |               |                                                                                    | ≤ 85 | -                                                                                                                                                                                                                                                                                                                                                                                        |                 | 1 + 1                                        |                                              |                              |     |                                              |  |
| Catalog numbers                                                                           |                 | Fixed support | <b>LVS04664</b>                                                                    |      |                                                                                                                                                                                                                                                                                                                                                                                          | <b>LVS04664</b> |                                              | <b>LVS04664 + LVS04671 (1)</b><br>(hardware) |                              |     |                                              |  |
|                                                                                           |                 | Free support  | <b>LVS04662</b>                                                                    |      |                                                                                                                                                                                                                                                                                                                                                                                          | <b>LVS04662</b> |                                              | <b>LVS04662 + LVS04671 (1)</b><br>(hardware) |                              |     |                                              |  |
| In duct<br>W = 400<br>busbar<br>supports<br>75 mm between<br>centres                      |                 |               | Number of supports<br>depending on lcw<br>(kA rms/1 s)                             | ≤ 25 | 1                                                                                                                                                                                                                                                                                                                                                                                        |                 |                                              |                                              |                              |     |                                              |  |
|                                                                                           |                 |               |                                                                                    | ≤ 40 | 1 + 1                                                                                                                                                                                                                                                                                                                                                                                    |                 | 1                                            |                                              |                              |     |                                              |  |
|                                                                                           |                 |               |                                                                                    | ≤ 50 | 1 + 1                                                                                                                                                                                                                                                                                                                                                                                    |                 |                                              |                                              |                              |     |                                              |  |
|                                                                                           |                 |               |                                                                                    | ≤ 85 | -                                                                                                                                                                                                                                                                                                                                                                                        |                 | 1 + 1                                        |                                              |                              |     |                                              |  |
|                                                                                           |                 |               | Catalog numbers                                                                    |      | Fixed support                                                                                                                                                                                                                                                                                                                                                                            | <b>LVS04664</b> |                                              |                                              | <b>LVS04664</b>              |     | <b>LVS04664 + LVS04671 (1)</b><br>(hardware) |  |
| Free support                                                                              | <b>LVS04662</b> |               |                                                                                    |      | <b>LVS04662</b>                                                                                                                                                                                                                                                                                                                                                                          |                 | <b>LVS04662 + LVS04671 (1)</b><br>(hardware) |                                              |                              |     |                                              |  |

| Joints                              |  |                 |          |                  |          |                 |          |                  |          |          |
|-------------------------------------|--|-----------------|----------|------------------|----------|-----------------|----------|------------------|----------|----------|
| Installation                        |  | Up to 1600 A    |          |                  |          | Up to 4000 A    |          |                  |          |          |
|                                     |  | 1 bar per phase |          | 2 bars per phase |          | 1 bar per phase |          | 2 bars per phase |          |          |
| Size of bars (mm)                   |  | 60 x 5          | 80 x 5   | 60 x 5           | 80 x 5   | 80 x 10         | 50 x 10  | 60 x 10          | 80 x 10  | 100 x 10 |
| Sliding joints with torque nut      |  |                 |          |                  |          |                 |          |                  |          |          |
| Catalog numbers (1 joint per phase) |  | LVS04640        | LVS04641 | LVS04640         | LVS04641 | LVS04641        | LVS04640 | LVS04640         | LVS04641 | LVS04643 |

Note when installed at the bottom of cubicles, the busbars must be partitioned.

(1) LVS04671: mounting hardware for bars or profile H = 100 or 120 mm. Contain 2 threaded rods and 4 insulators.

## LinerGY LGY

Lateral profiles up to 3200 A

400 mm deep installation

## Power busbars

| LinerGY LGY profiles                                                           |  | Up to 1600 A (simple busbars)                                                     |                                                                                   |                                                                                   |                                                                                   |                                                                                   | Up to 3200 A (double busbars)                                                       |                                                                                     |                                                                                     |
|--------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>In duct</b><br>LinerGY profiles, 1670 mm length                             |  | <b>W150</b>                                                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   | <b>2 x W150</b>                                                                     |                                                                                     |                                                                                     |
|                                                                                |  |  |  |  |  |  |  |  |  |
|                                                                                |  | DD381233-LIN-7.eps                                                                | DD381234-LIN-7.eps                                                                | DD381235-LIN-7.eps                                                                | DD385485.eps                                                                      | DD385486.eps                                                                      | DD381235-LIN-7.eps                                                                  | DD385485.eps                                                                        | DD385486.eps                                                                        |
|                                                                                |  | <b>630 A</b>                                                                      | <b>800 A</b>                                                                      | <b>1000 A</b>                                                                     | <b>1250 A</b>                                                                     | <b>1600 A</b>                                                                     | <b>2 x 1000 A</b>                                                                   | <b>2 x 1250 A</b>                                                                   | <b>2 x 1600 A</b>                                                                   |
| Permissible current for an ambient temperature of 35 °C around the switchboard |  | IP ≤ 31<br>680 A                                                                  | IP > 31<br>840 A                                                                  | 1040 A                                                                            | 1290 A                                                                            | 1650 A                                                                            | 2000 A                                                                              | 2500 A                                                                              | 3200 A                                                                              |
| Number of profiles per phase                                                   |  | 1                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   | 2                                                                                   |                                                                                     |                                                                                     |
| Catalog numbers                                                                |  | LVS04502                                                                          | LVS04503                                                                          | LVS04504                                                                          | LVS04505                                                                          | LVS04506                                                                          | LVS04504                                                                            | LVS04505                                                                            | LVS04506                                                                            |

## Busbar supports

DD381509New\_modif\_LIN-25.eps

DD380741-LIN.eps

Fixed support **LVS04651**

Characteristics



DD380742-LIN-12.eps

An end stop must be installed on the bottom support: **LVS01109** (set of 12).


Number of supports depending on  $I_{cu}$  (kA rms/1 s)

|           |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|-----------|---|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| $\leq 25$ | 3 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|-----------|---|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|

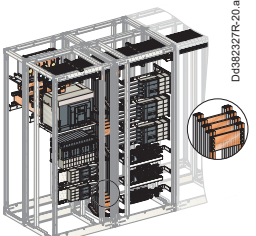
## Equipotential links

|                                                                                     |  |                                                     |  |  |  |                                                                                       |  |  |  |
|-------------------------------------------------------------------------------------|--|-----------------------------------------------------|--|--|--|---------------------------------------------------------------------------------------|--|--|--|
|  |  | 3 equipments must be installed between the busbars. |  |  |  |  |  |  |  |
|                                                                                     |  |                                                     |  |  |  | Connection made with a flat 80 x 10 mm busbar between 2 W150 ducts                    |  |  |  |

## Connections to the horizontal Linergy BS busbars

|                                                                                     |                     |                                                    |  |                          |  |                                           |  |  |  |
|-------------------------------------------------------------------------------------|---------------------|----------------------------------------------------|--|--------------------------|--|-------------------------------------------|--|--|--|
|  |                     |                                                    |  |                          |  |                                           |  |  |  |
| Characteristics                                                                     |                     | Mounting hardware supplied. Order 1 link per phase |  |                          |  |                                           |  |  |  |
| Cat. no. according to horizontal busbar size                                        | Thickness 5 mm      | <b>LVS04634</b> (1000 A)                           |  | <b>LVS04635</b> (1600 A) |  | -                                         |  |  |  |
|                                                                                     | Thickness W ≤ 80 mm | <b>LVS04636</b>                                    |  |                          |  | 2 x <b>LVS04636</b>                       |  |  |  |
|                                                                                     | 10 mm W 100 mm      | <b>LVS04636</b> + <b>LVS04642</b> (2)              |  |                          |  | 2 x <b>LVS04636</b> + 2 x <b>LVS04642</b> |  |  |  |
|                                                                                     | W 120 mm            | <b>LVS04638</b>                                    |  |                          |  | 2 x <b>LVS04638</b>                       |  |  |  |

## Connections to the horizontal Linergy LGYE busbars

|                                                                                     |  |                                                                                                     |  |  |  |  |  |  |  |
|-------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|
|  |  |                                                                                                     |  |  |  |  |  |  |  |
| Characteristics                                                                     |  | Supplied with mounting hardware. Catalog numbers include 1 connection only: 1 connection per phase. |  |  |  |  |  |  |  |
| Cat. no. according to horizontal busbar size                                        |  | <b>LVS04602</b> (vertical connection)<br><b>LVS04603</b> (vertical shifted connection) (1)          |  |  |  |  |  |  |  |

(1) Dedicated connection **LVS04603** for Linergy LGYE busbar in 150 mm duct with horizontal jointing(2) **LVS04642**: mounting hardware for bars > 80 mm. Comprises 2 threaded rods.

## LinerGY LGYE

Lateral profiles up to 4000 A

400 mm deep installation

Power busbars

| LinerGY LGYE profiles                                                          |                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |          |                                               |          |                                                           |                                 |          |                         |          |
|--------------------------------------------------------------------------------|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-----------------------------------------------|----------|-----------------------------------------------------------|---------------------------------|----------|-------------------------|----------|
|                                                                                |                                                  | LinerGY profile, 2000 mm length (1)                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |                                               |          |                                                           | LinerGY profile, 1625 mm length |          |                         |          |
| In duct                                                                        |                                                  | W150                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |          |                                               |          |                                                           | W150                            | W300     |                         |          |
| LinerGY profile                                                                |                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |          |                                               |          |                                                           |                                 |          |                         |          |
|                                                                                |                                                  | 630 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 800 A    | 1000 A                                        | 1250 A   | 1600 A                                                    | 2000 A                          | 2500 A   | 3200 A                  | 4000 A   |
| Permissible current for an ambient temperature of 35 °C around the switchboard | IP ≤ 31                                          | 630 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 800 A    | 1000 A                                        | 1250 A   | 1650 A                                                    | 2000 A                          | 2440 A   | 3200 A                  | 3620     |
|                                                                                | IP > 31                                          | 530 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 680 A    | 850 A                                         | 1050 A   | 1480 A                                                    | 1650 A                          | 2100 A   | 2800 A                  | 3350     |
| Length to cut for side mounting                                                |                                                  | 1675 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |          |                                               |          |                                                           | -                               |          | -                       |          |
| Number of profiles per phase                                                   |                                                  | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |          |                                               |          |                                                           |                                 |          |                         |          |
| Catalog numbers                                                                |                                                  | LVS04560                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | LVS04561 | LVS04562                                      | LVS04563 | LVS04564                                                  | LVS04507                        | LVS04508 | LVS04509                | LVS04510 |
| Busbar supports                                                                |                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |          |                                               |          |                                                           |                                 |          |                         |          |
|                                                                                |                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |          |                                               |          |                                                           |                                 |          |                         |          |
|                                                                                |                                                  | Fixed support LVS04661                                                                                                                                                                                                                                                                                                                                                                                                                                                             |          | Free support LVS04662                         |          | Bottom support LVS04666                                   |                                 |          |                         |          |
|                                                                                |                                                  | Characteristics                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |          |                                               |          |                                                           |                                 |          |                         |          |
|                                                                                |                                                  | Attach directly to the framework.<br>Three fixed supports are required to maintain the busbars.<br>If more than three supports are required, use additional free supports.<br>The bottom support maintains the bars in position.<br>It is not considered a busbar support.<br><b>Note:</b> in case of 600 mm depth with 115 mm between centers, replace LVS04661 fixed support by LVS04668, free support LVS04662 by LVS04678 and bottom support LVS04663 or LVS04666 by LVS04673. |          |                                               |          |                                                           |                                 |          |                         |          |
|                                                                                | Number depending on l <sub>cw</sub> (kA rms/1 s) | ≤ 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 3        |                                               | 3+2      |                                                           | 3                               |          |                         |          |
|                                                                                |                                                  | ≤ 40                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | -        |                                               | 3+2      |                                                           | 3                               |          |                         |          |
|                                                                                |                                                  | ≤ 50                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | -        |                                               | 3+2      |                                                           | 3                               |          |                         |          |
|                                                                                |                                                  | ≤ 60                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | -        |                                               | 3+2      |                                                           |                                 |          | 3                       |          |
|                                                                                |                                                  | ≤ 65                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | -        |                                               | 3+2      |                                                           |                                 |          |                         |          |
|                                                                                |                                                  | ≤ 75                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | -        |                                               | 3+4      |                                                           |                                 |          | 3+2                     |          |
|                                                                                |                                                  | ≤ 85                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | -        |                                               | 3+4      |                                                           |                                 |          |                         |          |
|                                                                                |                                                  | ≤ 100                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | -        |                                               |          |                                                           | 3+6                             |          |                         |          |
| In duct W150, W = 300 busbar supports 75 mm between centres                    | Catalog numbers                                  | Fixed support                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | LVS04661 |                                               |          |                                                           | LVS04661 + LVS04671 (2)         |          | LVS04661 + LVS04646 (3) |          |
|                                                                                |                                                  | Free support                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | LVS04662 |                                               |          |                                                           | LVS04662 + LVS04671 (2)         |          | LVS04662 + LVS04646 (3) |          |
| Busbars chocks                                                                 |                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |          |                                               |          |                                                           |                                 |          |                         |          |
|                                                                                |                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |          |                                               |          |                                                           |                                 |          |                         |          |
|                                                                                |                                                  | Chocks installed on a bottom support LVS04658                                                                                                                                                                                                                                                                                                                                                                                                                                      |          | Chocks installed on a bottom support LVS04659 |          |                                                           |                                 |          |                         |          |
|                                                                                |                                                  | Characteristics                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |          |                                               |          |                                                           |                                 |          |                         |          |
|                                                                                |                                                  | The bottom support maintains the sections in position.<br>It is not considered a busbar support.                                                                                                                                                                                                                                                                                                                                                                                   |          |                                               |          |                                                           |                                 |          |                         |          |
| In duct W150, W = 300                                                          | Catalog numbers                                  | Bottom support                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | LVS04663 |                                               |          |                                                           |                                 |          | LVS04666 + LVS04661     |          |
|                                                                                |                                                  | Chocks                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | LVS04658 |                                               |          |                                                           | LVS04659                        |          |                         |          |
| Connections to the horizontal Linergy LGYE busbars                             |                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |          |                                               |          |                                                           |                                 |          |                         |          |
|                                                                                |                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |          |                                               |          |                                                           |                                 |          |                         |          |
|                                                                                |                                                  | 630 to 1600 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |          | 2000 to 2500 A                                |          | 3200 to 4000 A                                            |                                 |          |                         |          |
|                                                                                |                                                  | Characteristics                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |          |                                               |          |                                                           |                                 |          |                         |          |
|                                                                                |                                                  | Supplied with mounting hardware.<br>Catalog numbers include 1 connection only: 1 connection per phase.                                                                                                                                                                                                                                                                                                                                                                             |          |                                               |          |                                                           |                                 |          |                         |          |
| Cat. no. according to horizontal busbar size                                   |                                                  | LVS04602 (straight connection)<br>LVS04603 (shifted connection)                                                                                                                                                                                                                                                                                                                                                                                                                    |          |                                               |          | LVS04604 (short connection)<br>LVS04605 (long connection) |                                 | LVS04607 |                         |          |

(1) Linergy LGYE profiles up to 1600 A must be cut at the dimension of the cubicle : 1625 mm

(2) LVS04671: mounting hardware for bars or profile H = 100 or 120 mm. Contain 2 threaded rods and 4 insulators.

(3) LVS04646: mounting hardware for bars or profile H = 150 mm. Contain 2 threaded rods and 3 insulators

400 mm deep installation

| Flat bars                                                                      |              |          |          |          |              |          |          |          |          |          |          |          |              |              |
|--------------------------------------------------------------------------------|--------------|----------|----------|----------|--------------|----------|----------|----------|----------|----------|----------|----------|--------------|--------------|
|                                                                                | Up to 1600 A |          |          |          | Up to 4000 A |          |          |          |          |          |          |          |              |              |
| In duct                                                                        | W150         |          |          |          | W150         |          |          |          |          |          | 2 x W150 | W300     |              |              |
| Copper with holes, 1675 mm length<br>                                          |              |          |          |          |              |          |          |          |          |          |          |          |              |              |
| Permissible current for an ambient temperature of 35 °C around the switchboard | IP ≤ 31      | 800 A    | 1000 A   | 1400 A   | 1800 A       | 1200 A   | 1400 A   | 1800 A   | 2050 A   | 2300 A   | 2820 A   | 3200 A   | 3200 A       | 3760 A       |
|                                                                                | IP > 31      | 750 A    | 900 A    | 1250 A   | 1600 A       | 1080 A   | 1250 A   | 1600 A   | 1850 A   | 2000 A   | 2500 A   | 2820 A   | 2820 A       | 3340 A       |
| Size of bars (mm)                                                              |              | 60 x 5   | 80 x 5   | 60 x 5   | 80 x 5       | 50 x 10  | 60 x 10  | 80 x 10  | 50 x 10  | 60 x 10  | 80 x 10  | 80 x 10  | 100 x 10     | 120 x 10     |
| Number of bars per phase                                                       |              | 1        | 2        |          |              | 1        |          |          | 2        |          |          |          |              |              |
| Catalog numbers                                                                |              | LVS04516 | LVS04518 | LVS04516 | LVS04518     | LVS04525 | LVS04526 | LVS04528 | LVS04525 | LVS04526 | LVS04528 | LVS04528 | LVS04550 (1) | LVS04552 (1) |

|                                                                                   |                                                              |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |              |                     |         |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|---------|
|  | Description                                                  |                | <p>Drilled bars.</p> <p>Three fixed supports are required to maintain the busbars. If more than three supports are required, use additional free supports.</p> <p>The bottom support maintains the bars in position.</p> <p>It is not considered a busbar support.</p> <p><b>Note:</b> In case of 600 mm depth with 115 mm between centers, replace LVS04661 fixed support by <b>LVS04668</b> and LVS04662 free support by <b>LVS04678</b> and <b>LVS04663</b> or <b>LVS04666</b> bottom support by <b>LVS04673</b>.</p> |              |                     |         |
|                                                                                   | Number of supports depending on l <sub>bw</sub> (kA rms/1 s) | ≤ 15           | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 3            | 2 x 3               |         |
|                                                                                   |                                                              | ≤ 25           | 3+2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 3            | 3                   | 2 x 3   |
|                                                                                   |                                                              | ≤ 30           | 3+2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 3+2          | 3                   | 2 x 3   |
|                                                                                   |                                                              | ≤ 40           | 3+4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 3+2          |                     | 2 x 3   |
|                                                                                   |                                                              | ≤ 50           | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 3+4          |                     | 2 x 3   |
|                                                                                   |                                                              | ≤ 60           | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 3+4          | 3+2                 | 2 x 3+2 |
|                                                                                   |                                                              | ≤ 65           | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 3+4          | 3+2                 | 2 x 3+2 |
|                                                                                   |                                                              | ≤ 75           | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 3+6          | 3+4                 | 2 x 3+2 |
|                                                                                   |                                                              | ≤ 85           | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |              | 3+4                 | 2 x 3+2 |
| In duct<br>W150, W = 300<br>busbar supports<br>75 mm between<br>centres           | Catalog numbers                                              | Fixed support  | LVS04661                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 2 x LVS04661 | LVS04661 + LVS04671 |         |
|                                                                                   |                                                              | Free support   | LVS04662                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 2 x LVS04662 | LVS04662 + LVS04671 |         |
|                                                                                   |                                                              | Bottom support | LVS04663                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 2 x LVS04663 | LVS04666 + LVS04661 |         |
|                                                                                   |                                                              |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |              |                     |         |

|                                                                                                                                                                                                                 |         |                                                                                                                                                                                                                                                                      |        |                  |        |                            |         |                                                                                                                                                                                                                             |                            |         |         |                                  |                  |                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|------------------|--------|----------------------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------|---------|----------------------------------|------------------|-----------------|
| <div> <div>  </div> <div>  </div> </div> |         |                                                                                                                                                                                                                                                                      |        |                  |        |                            |         |                                                                                                                                                                                                                             |                            |         |         |                                  |                  |                 |
| Characteristics                                                                                                                                                                                                 |         | <p>For busbars with 75 mm between centres, the bars must fully overlap. To satisfy safety clearances, the assembly points on adjacent bars must be staggered as shown above.</p>  |        |                  |        |                            |         | <p>Catalog numbers <b>LVS04636</b> and <b>LVS04637</b> include 1 connection only. Order 1 connection per phase. Reference <b>LVS04642</b> consists of 2 M8 x 140 screws which can replace the original M8 x 120 screws.</p> |                            |         |         |                                  |                  |                 |
|                                                                                                                                                                                                                 |         | 1 bar per phase                                                                                                                                                                                                                                                      |        | 2 bars per phase |        | 1 bar per phase            |         |                                                                                                                                                                                                                             | 2 bars per phase           |         |         | double BB                        | 2 bars per phase |                 |
| Size of vertical bars (mm)                                                                                                                                                                                      |         | 60 x 5                                                                                                                                                                                                                                                               | 80 x 5 | 60 x 5           | 80 x 5 | 50 x 10                    | 60 x 10 | 80 x 10                                                                                                                                                                                                                     | 50 x 10                    | 60 x 10 | 80 x 10 | 80 x 10                          | 100 x 10         | 120 x 10        |
| Catalog number of the connecting part according to the size of the horizontal bars                                                                                                                              | ≤ 80 mm | <b>LVS04782</b>                                                                                                                                                                                                                                                      |        |                  |        | <b>LVS04636</b>            |         | <b>LVS04637</b>                                                                                                                                                                                                             | <b>LVS04637</b>            |         |         | <b>2x LVS04637</b>               | <b>LVS04645</b>  | <b>LVS04645</b> |
|                                                                                                                                                                                                                 | 100 mm  | <b>LVS04782</b>                                                                                                                                                                                                                                                      |        |                  |        | <b>LVS04636 + LVS04642</b> |         | <b>LVS04637 + LVS04642</b>                                                                                                                                                                                                  | <b>LVS04637 + LVS04642</b> |         |         | <b>2x LVS04637 + 2x LVS04642</b> | <b>LVS04645</b>  | <b>LVS04645</b> |
|                                                                                                                                                                                                                 | 120 mm  | <b>LVS04782</b>                                                                                                                                                                                                                                                      |        |                  |        | <b>LVS04638</b>            |         | <b>LVS04638</b>                                                                                                                                                                                                             | <b>LVS04638</b>            |         |         | <b>2x LVS04638</b>               | <b>LVS04645</b>  | <b>LVS04645</b> |

(1) Copper plain bars, 2000 mm length.

Drilling diagram for horizontal busbars,  
5 mm thick






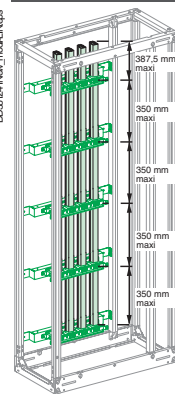





Drilling diagram for horizontal busbars,  
10 mm thick.

**Note:** for more information > *page J-3*.

## LinerGY LGY

Rear profiles up to 1600 A

## Power busbars

| LinerGY LGY profiles                                                               |                              |           | Up to 1600 A                                                                                                                 |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|------------------------------|-----------|------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| At the rear of the cubicle                                                         |                              |           | W650                                                                                                                         |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| LinerGY profile, 1670 mm length                                                    |                              |           |                                             |  |  |  |  |
|                                                                                    |                              |           | 630 A                                                                                                                        | 800 A                                                                             | 1000 A                                                                             | 1250 A                                                                              | 1600 A                                                                              |
| Permissible current for an ambient temperature of 35 °C around the switchboard     | IP ≤ 31                      |           | 680 A                                                                                                                        | 840 A                                                                             | 1040 A                                                                             | 1290 A                                                                              | 1650 A                                                                              |
|                                                                                    | IP > 31                      |           | 590 A                                                                                                                        | 760 A                                                                             | 950 A                                                                              | 1170 A                                                                              | 1480 A                                                                              |
| Number of profiles per phase                                                       |                              |           | 1                                                                                                                            |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| Catalog numbers                                                                    |                              |           | LVS04502                                                                                                                     | LVS04503                                                                          | LVS04504                                                                           | LVS04505                                                                            | LVS04506                                                                            |
| Busbar supports                                                                    |                              |           |                                                                                                                              |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|  |                              |           |                                             |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|                                                                                    |                              |           | Fixed support <b>LVS04652</b>                                                                                                |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|                                                                                    | Number of supports           | ≤ 25      | 3                                                                                                                            |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|                                                                                    | depending on I <sub>cu</sub> | ≤ 30      | 4                                                                                                                            |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|                                                                                    |                              | ≤ 40      | 5                                                                                                                            |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|                                                                                    | (kA rms/1 s) ≤ 50            |           | 7                                                                                                                            |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| Characteristics                                                                    |                              |           |                                            |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|                                                                                    |                              |           | Stop to be installed on the bottom support. <b>LVS01109</b> (set of 12).                                                     |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| Catalog numbers                                                                    |                              |           | Fixed support <b>LVS04652</b>                                                                                                |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|                                                                                    |                              |           | Chock <b>LVS01109</b>                                                                                                        |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| Connections to the horizontal Linergy BS flat busbars                              |                              |           |                                                                                                                              |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|                                                                                    |                              |           |                                           |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|                                                                                    |                              |           | Connection <b>LVS04635</b> to horizontal busbars 5 mm thick.                                                                 |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|                                                                                    |                              |           |                                          |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|                                                                                    |                              |           | Connection <b>LVS04636</b> to horizontal busbars 10 mm thick.                                                                |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| Characteristics                                                                    |                              |           | Mounting hardware supplied, order 1 connection per phase. For part of the connection, flexible insulated busbars are needed. |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| Cat. no. according to horizontal busbar size                                       | Thickness 5 mm               |           | <b>LVS04635</b>                                                                                                              |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|                                                                                    | Thickness 10 mm              | W ≤ 80 mm | <b>LVS04636</b>                                                                                                              |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|                                                                                    |                              | W > 80 mm | <b>LVS04636 + LVS04642</b>                                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| Connections to the horizontal Linergy LGYE flat busbars                            |                              |           |                                                                                                                              |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|                                                                                    |                              |           |                                           |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|                                                                                    |                              |           | Connection <b>LVS04602</b> to horizontal Linergy LGYE busbars 5 mm thick.                                                    |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| Characteristics                                                                    |                              |           | Mounting hardware supplied, order 1 connection per phase. For part of the connection, flexible insulated busbars are needed. |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| Catalog numbers                                                                    |                              |           | <b>LVS04602</b>                                                                                                              |                                                                                   |                                                                                    |                                                                                     |                                                                                     |



## Linerger BS

Rear busbars up to 1600 A

## Power busbars

| Flat bars                                                                      |  |                                                                                                                                                                                                                                                                                                                                           |                                |                      |          |                                                                     |          |          |
|--------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|----------------------|----------|---------------------------------------------------------------------|----------|----------|
|                                                                                |  | Up to 1600 A                                                                                                                                                                                                                                                                                                                              |                                |                      |          |                                                                     |          |          |
| At the rear of the cubicle                                                     |  | L650                                                                                                                                                                                                                                                                                                                                      |                                |                      |          |                                                                     |          |          |
| Copper with holes,<br>1670 mm length                                           |  |                                                                                                                                                                                                                                                                                                                                           |                                |                      |          |                                                                     |          |          |
|                                                                                |  | 800 A                                                                                                                                                                                                                                                                                                                                     | 1000 A                         | 1400 A               | 1800 A   | 1000 A                                                              | 1200 A   | 1600 A   |
| Permissible current for an ambient temperature of 35 °C around the switchboard |  | IP ≤ 31<br>800 A                                                                                                                                                                                                                                                                                                                          | 1000 A                         | 1400 A               | 1800 A   | -                                                                   | -        | -        |
|                                                                                |  | IP > 31<br>750 A                                                                                                                                                                                                                                                                                                                          | 900 A                          | 1250 A               | 1600 A   | 1080 A                                                              | 1250 A   | 1600 A   |
| Size of bars (mm)                                                              |  | 60 x 5                                                                                                                                                                                                                                                                                                                                    | 80 x 5                         | 60 x 5               | 80 x 5   | 50 x 10                                                             | 60 x 10  | 80 x 10  |
| Number of bars per phase                                                       |  | 1                                                                                                                                                                                                                                                                                                                                         |                                | 2                    |          | 1                                                                   |          |          |
| Catalog numbers                                                                |  | LVS04516                                                                                                                                                                                                                                                                                                                                  | LVS04518                       | LVS04516             | LVS04518 | LVS04525                                                            | LVS04526 | LVS04528 |
| Busbar supports                                                                |  |                                                                                                                                                                                                                                                                                                                                           |                                |                      |          |                                                                     |          |          |
|                                                                                |  |                                                                                                                                                                                                                                                                                                                                           |                                |                      |          |                                                                     |          |          |
|                                                                                |  | Fixed busbar supports <b>LVS04653</b>                                                                                                                                                                                                                                                                                                     |                                | Free busbar supports |          | Mounting chocks <b>LVS04669</b>                                     |          |          |
| Characteristics                                                                |  | Three fixed supports cat. no. LVS04653 are required to maintain the busbars.<br>If more than three supports are required, use additional free supports cat. no. LVS04662.<br>A metal mounting chock, cat. no. LVS04669 (set of 100) 5 mm thick, is screwed to the bar. It rests on a fixed support and maintains the position of the bar. |                                |                      |          |                                                                     |          |          |
|                                                                                |  |                                                                                                                                                                                                                                                                                                                                           |                                |                      |          |                                                                     |          |          |
|                                                                                |  | Chock: 1 bar/phase                                                                                                                                                                                                                                                                                                                        |                                |                      |          |                                                                     |          |          |
|                                                                                |  |                                                                                                                                                                                                                                                                                                                                           |                                |                      |          |                                                                     |          |          |
|                                                                                |  | Chock: 2 bars/phase                                                                                                                                                                                                                                                                                                                       |                                |                      |          |                                                                     |          |          |
| Number of supports depending on I <sub>rw</sub> (kA rms/1 s)                   |  | ≤ 15                                                                                                                                                                                                                                                                                                                                      | 3                              |                      |          | 3                                                                   |          |          |
|                                                                                |  | ≤ 25                                                                                                                                                                                                                                                                                                                                      | 3+2                            |                      |          | 3                                                                   | 3        |          |
|                                                                                |  | ≤ 30                                                                                                                                                                                                                                                                                                                                      | 3+2                            |                      |          | 3+2                                                                 |          |          |
|                                                                                |  | ≤ 40                                                                                                                                                                                                                                                                                                                                      | 3+4                            |                      |          | 3+2                                                                 | 3+2      |          |
|                                                                                |  | ≤ 50                                                                                                                                                                                                                                                                                                                                      | -                              |                      |          | 3+4                                                                 | 3+2      |          |
|                                                                                |  | ≤ 60                                                                                                                                                                                                                                                                                                                                      | -                              |                      |          | 3+4                                                                 |          |          |
|                                                                                |  | ≤ 65                                                                                                                                                                                                                                                                                                                                      | -                              |                      |          | 3+4                                                                 |          |          |
|                                                                                |  | ≤ 75                                                                                                                                                                                                                                                                                                                                      | -                              |                      |          | -                                                                   |          |          |
|                                                                                |  | ≤ 85                                                                                                                                                                                                                                                                                                                                      | -                              |                      |          | 3+6                                                                 |          |          |
| Catalog numbers                                                                |  | LVS04653 (fixed) + LVS04662 (free) + LVS04669 (chock)                                                                                                                                                                                                                                                                                     |                                |                      |          |                                                                     |          |          |
| Connections to the horizontal Linergy BS flat busbars                          |  |                                                                                                                                                                                                                                                                                                                                           |                                |                      |          |                                                                     |          |          |
|                                                                                |  |                                                                                                                                                                                                                                                                                                                                           |                                |                      |          |                                                                     |          |          |
|                                                                                |  | Connection <b>LVS04636</b> to horizontal busbars<br>Thickness 5 mm                                                                                                                                                                                                                                                                        |                                |                      |          | Connection <b>LVS04636</b> to horizontal busbars<br>Thickness 10 mm |          |          |
| Characteristics                                                                |  | For part of the connection, flexible insulated busbars are needed.<br>Catalog numbers <b>LVS04635</b> and <b>LVS04636</b> include 1 connection only = 1 connection per phase.<br>Reference LVS04642 consists of 2 M8 x 140 screws which can replace the original M8 x 120 screws.                                                         |                                |                      |          |                                                                     |          |          |
| Cat. no. according to horizontal busbar size                                   |  | Thickness 5 mm                                                                                                                                                                                                                                                                                                                            | <b>LVS04635</b>                |                      |          |                                                                     |          |          |
|                                                                                |  | Thickness 10 mm                                                                                                                                                                                                                                                                                                                           | <b>LVS04636 (1)</b>            |                      |          |                                                                     |          |          |
|                                                                                |  |                                                                                                                                                                                                                                                                                                                                           | <b>LVS04636 + LVS04642 (1)</b> |                      |          |                                                                     |          |          |

(1) To be made.

G-8

Life Is On

Schneider  
Electric


Version : 11 - 03/10/2022

160E7100

## Linerger BS

Rear busbars up to 630 A

## Power busbars



## IEC 61439-1 &amp; 2

## Description


The busbar can be 3-pole or 4-pole with ratings between 160 A and 630 A.

2 lengths are available: 1000 and 1400 mm, which can be cut as required.

The number of supports depends on the installation maximum rated current.


The insulating supports can receive a fifth bar, 15 x 5 mm or 20 x 5 mm, to create an earth bar.

## 160 to 400 A copper busbars




|                                                 | 160 A                                                                                                                     | 250 A                   | 400 A                   | 630 A                   |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------|-------------------------|
| Rated peak withstand current (I <sub>pk</sub> ) | 30 kA                                                                                                                     | 40 kA                   | 55 kA                   | 77 kA                   |
| Rated insulation voltage (U <sub>i</sub> )      | 1000 V AC                                                                                                                 | 1000 V AC               | 1000 V AC               | 1000 V AC               |
| Rated short-time current (I <sub>cc</sub> )     | 150 kA                                                                                                                    | 150 kA                  | 150 kA                  | 150 kA                  |
| Thermal stress (I <sup>2</sup> .t)              | 1.000 x 10 <sup>8</sup>                                                                                                   | 1.690 x 10 <sup>8</sup> | 6.250 x 10 <sup>8</sup> | 1.225 x 10 <sup>8</sup> |
| Conductor cross-section                         | 15 x 5 mm                                                                                                                 | 20 x 5 mm               | 32 x 5 mm               | 32 x 8 mm               |
| Installation                                    | Threaded M6 holes every 25 mm all the way up<br>Connection by: 16 to 50 mm <sup>2</sup> flexible cables with crimped lugs |                         |                         |                         |
| Set of                                          | 4                                                                                                                         |                         |                         |                         |
| Length (mm)                                     | 1000                                                                                                                      | 1400                    | 1000                    | 1400                    |
| Catalog numbers                                 | LVS04161                                                                                                                  | LVS04171                | LVS04162                | LVS04172                |

## Insulating busbar support

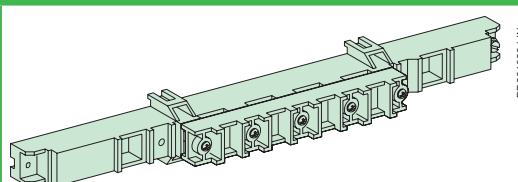

|                                                                             |                                                                                                 |          |          |          |        |
|-----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------|----------|----------|--------|
| Distance between supports depending on I <sub>cw</sub> /I <sub>pk</sub> (1) | ≤ 10 kA eff / 1 s                                                                               | 450 mm   | 450 mm   | 450 mm   | 450 mm |
|                                                                             | ≤ 13 kA eff / 1 s                                                                               | -        | 450 mm   | 450 mm   | 450 mm |
|                                                                             | ≤ 15 kA eff / 1 s                                                                               | -        | 450 mm   | 450 mm   | 450 mm |
|                                                                             | ≤ 20 kA eff / 1 s                                                                               | -        | -        | 300 mm   | 300 mm |
|                                                                             | ≤ 25 kA eff / 1 s                                                                               | -        | -        | 225 mm   | 225 mm |
|                                                                             | ≤ 30 kA eff / 1 s                                                                               | -        | -        | -        | 225 mm |
|                                                                             | ≤ 35 kA eff / 1 s                                                                               | -        | -        | -        | 175 mm |
| Installation                                                                | On the rear uprights<br>Screwed onto a solid or pre-slotted plate (fixing centres 450 x 200 mm) |          |          |          |        |
| Catalog numbers                                                             | LVS04191                                                                                        | LVS04191 | LVS04191 | LVS04191 | LG4193 |

## IPxxB insulating protective shield

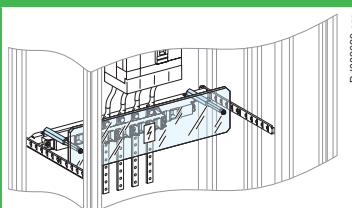

|                 |                        |
|-----------------|------------------------|
| Length          | 470 mm                 |
| Height          | 100 mm                 |
| Composition     | Supplied with fixings. |
| Catalog numbers | LVS04198               |


**Note:** electrical characteristics > page G-41.

(1) Linergy FM 200 A distribution blocks with connections ref. LVS04029 can act as intermediate supports (max. distance apart 200 mm) in addition to the support ref. LVS04191 at the top and bottom.

## Linerger BS

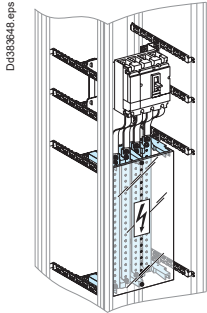Multi-stage busbars up to 630 A

## Power busbars



## IEC 61439-1 &amp; 2

## Description

Multi-stage busbars are installed in a sheath  $W = 400$  mm.

We strongly recommend dividing the current between 2 cubicles or enclosures joined on either sides.

All the connection points are easily accessible from the front.


The busbar orientation makes them easier to tighten and facilitates running the cables between them.

The current can be 3-pole or 4-pole with ratings between 160 A and 630 A.

2 lengths are available: 1000 and 1400 mm, which can be cut as required.


The number of supports depends on the installation maximum rated current.

## 160 to 630 A copper busbars




|                                                       | 160 A                                                                      | 250 A                   | 400 A                    | 630 A                   |
|-------------------------------------------------------|----------------------------------------------------------------------------|-------------------------|--------------------------|-------------------------|
| Rated peak withstand current (I <sub>pk</sub> )       | 30 kA                                                                      | 40 kA                   | 55 kA                    | 55 kA                   |
| Rated insulation voltage (U <sub>i</sub> )            | 750 V AC                                                                   | 750 V AC                | 750 V AC                 | 750 V AC                |
| Rated short-time current (I <sub>cc</sub> )           | 150 kA                                                                     | 150 kA                  | 150 kA                   | 150 kA                  |
| Thermal stress (I <sup>2</sup> .t)                    | 1.000 x 10 <sup>8</sup>                                                    | 1.690 x 10 <sup>8</sup> | 4.000 x 10 <sup>8</sup>  | 6.250 x 10 <sup>8</sup> |
| Rated short-time withstand current (I <sub>cw</sub> ) | 10 kA rms/1 second                                                         | 13 kA rms/1 second      | 15/20/25 kA rms/1 second | 35 kA rms/1 second      |
| Supply at incoming terminals                          | Connection by: 16 to 50 mm <sup>2</sup> flexible cables with crimped lugs. |                         |                          |                         |
| Conductor cross-section                               | 15 x 5 mm                                                                  | 20 x 5 mm               | 32 x 5 mm                | 32 x 8 mm               |
| Installation                                          | Flat copper busbar with threaded M6 holes every 25 mm all the way up.      |                         |                          |                         |
| Set of                                                | 4                                                                          |                         |                          |                         |
| Width (mm)                                            | 1000                                                                       | 1400                    | 1000                     | 1400                    |
| Catalog numbers                                       | LVS04161                                                                   | LVS04171                | LVS04162                 | LVS04172                |
|                                                       | LVS04163                                                                   | LVS04173                | To be made               | LVS04174                |

## Insulating busbar support

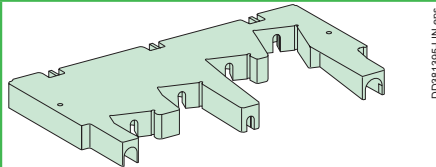

|                                               |                                                                                                                                     |          |          |          |          |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|----------|----------|----------|----------|
| Distance between supports                     | ≤ 10 kA rms/ 1 s / 30 kA                                                                                                            | 450 mm   | 450 mm   | 450 mm   | 450 mm   |
| depending on I <sub>cw</sub> /I <sub>pk</sub> | ≤ 13 kA rms/ 1 s / 40 kA                                                                                                            | -        | 450 mm   | 450 mm   | 450 mm   |
|                                               | ≤ 15 kA rms/ 1 s / 40 kA                                                                                                            | -        | -        | 450 mm   | 450 mm   |
|                                               | ≤ 20 kA rms/ 1 s / 45 kA                                                                                                            | -        | -        | 300 mm   | 300 mm   |
|                                               | ≤ 25 kA rms/ 0.6 s / 55 kA                                                                                                          | -        | -        | 300 mm   | -        |
|                                               | ≤ 25 kA rms/ 1 s / 55 kA                                                                                                            | -        | -        | -        | 300 mm   |
| Installation                                  | Installation on functional uprights of duct (PrismaSeT).<br>Screwed onto a solid or pre-slotted plate (450 x 200 mm fixing centres) |          |          |          |          |
| Catalog numbers                               | LVS04192                                                                                                                            | LVS04192 | LVS04192 | LVS04192 | LVS04192 |

## IPxxB insulating protective shield




|                 |                                                             |
|-----------------|-------------------------------------------------------------|
| Width           | 250 mm                                                      |
| Height          | 1500 mm                                                     |
| Composition     | Fixing accessories supplied with support cat. no. LVS04192. |
| Catalog numbers | LVS04197                                                    |

Note: electrical characteristics > page G-41.

## Linerger BS

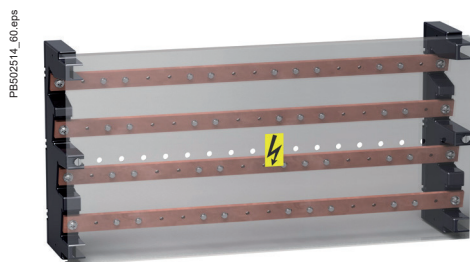Multi-stage distribution block up to 630 A

## Power busbars



## IEC 61439-1 &amp; 2

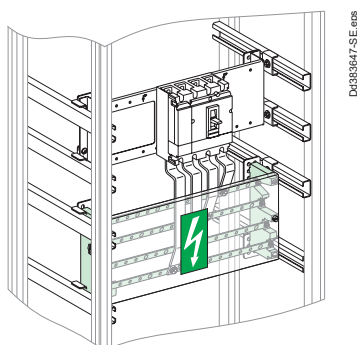
## Description

The distribution block can be installed horizontally in the device zone or vertically in the 300 mm wide duct of enclosures and cubicles.


The distribution block is made up of:

- two staggered supports made of an insulating material
- four slanted copper bars with holes every 25 mm.

## Multi-stage distribution block



|                                                     | 160 A                                                                                                              | 250 A                   | 400 A                   | 630 A                   |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------|-------------------------|
| Rated peak withstand current (I <sub>pk</sub> )     | 30 kA                                                                                                              | 40 kA                   | 55 kA                   | 55 kA                   |
| Rated insulation voltage (U <sub>i</sub> )          | 750 V AC                                                                                                           |                         |                         |                         |
| Rated operational voltage (U <sub>e</sub> )         | 440 V AC                                                                                                           |                         |                         |                         |
| Rated impulse withstand voltage (U <sub>imp</sub> ) | 8 kV                                                                                                               |                         |                         |                         |
| Rated short-time current (I <sub>cc</sub> )         | 150 kA                                                                                                             | 150 kA                  | 150 kA                  | 150 kA                  |
| Thermal stress (I <sup>2</sup> .t)                  | 1.000 x 10 <sup>8</sup>                                                                                            | 1.690 x 10 <sup>8</sup> | 4.000 x 10 <sup>8</sup> | 6.250 x 10 <sup>8</sup> |
| Total connection capacity                           | 4 incomers per phase: Ø12.2 mm clearance holes<br>13 outgoing per phase 16 to 50 mm <sup>2</sup> : M6 tapped holes |                         |                         |                         |
| Busbar cross-section                                | 15 x 5 mm                                                                                                          | 20 x 5 mm               | 32 x 5 mm               | 32 x 8 mm               |
| Dimensions (mm)                                     |                                                                                                                    |                         |                         |                         |




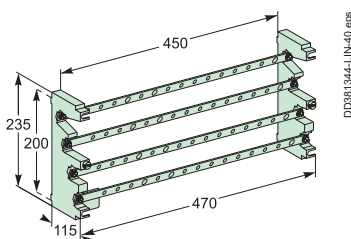


|                 |                                                                                                                                                                                               |          |          |          |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|----------|
| Installation    | Screwed onto a solid or pre-slotted plate (fixing centres 450 x 200 mm)<br>Screwed to an adapter cat. no. <b>LVS03595</b> .                                                                   |          |          |          |
| Composition     | 2 multi-stage supports made of an insulating material<br>4 slanted copper busbars, with holes every 25 mm<br>1 pack of 36 M6 x 16 screws + contact washers<br>1 IPxxB front insulating shield |          |          |          |
| Catalog numbers | LVS04052                                                                                                                                                                                      | LVS04053 | LVS04054 | LVS04055 |

## Linerger BS

Incomer accessories up to 630 A

## Power busbars



| Incomer accessories                     |                                                                                   |                                                                                   |                                                                                     |
|-----------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                         |  |  |  |
|                                         | <b>Connectors for copper or aluminium cables</b>                                  |                                                                                   |                                                                                     |
| Rated operational current at 40 °C (Ie) | 160 A                                                                             | 250 A                                                                             | 400 A                                                                               |
| Supply at incoming terminals            | 70 mm <sup>2</sup> Cables                                                         | 16 - 185 mm <sup>2</sup> Cables                                                   | 70 - 300 mm <sup>2</sup> Cables                                                     |
| Composition                             | Supplied with fixings at busbar end.                                              |                                                                                   |                                                                                     |
| Set of                                  | 4                                                                                 |                                                                                   |                                                                                     |
| Catalog numbers                         | LVS07051                                                                          | LVS07052                                                                          | LVS07053                                                                            |
| Outgoer accessories                     |                                                                                   |                                                                                   |                                                                                     |
|                                         |  |                                                                                   |                                                                                     |
|                                         | <b>Class 8.8 fixing accessories</b>                                               |                                                                                   |                                                                                     |
| Composition                             | 20 M6 x 20 screws + 20 nuts<br>+ 40 contact washers                               | 40 M6 x 16 screws<br>+ 40 contact washers                                         |                                                                                     |
| Catalog numbers                         | LVS04194                                                                          | LVS04195                                                                          |                                                                                     |


**Note:** electrical characteristics > page G-41.

## Linerage Busbars


## Accessories

## Power busbars

| Accessories     |                                                                                                                                               |          |                                                                                                       |              |              |                                                                                                        |                                                     |                                                                                                  |                                                                                                               |                                                                                                              |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------------------------|--------------|--------------|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
|                 |  DD385390 eps                                                |          |  DD381219-LIN-16 eps |              |              |  DD381222-LIN-10 eps |                                                     |  DD385489 eps |                                                                                                               |  DD385391 eps             |
|                 | Linerage connection hardware                                                                                                                  |          | Steel flat washers                                                                                    |              |              | Brass flat washers                                                                                     |                                                     | Markers                                                                                          |                                                                                                               | Screwplate                                                                                                   |
| Cat. no.        | LVS04766                                                                                                                                      | LVS04767 | LVS04772                                                                                              | LVS04773     | LVS04774     | LVS04775                                                                                               | LVS04794                                            | LVS01130                                                                                         | LVS04768                                                                                                      | LVS04769                                                                                                     |
| Characteristics | L 25 mm                                                                                                                                       | L 39 mm  | 20 mm ext. Ø                                                                                          | 24 mm ext. Ø | 28 mm ext. Ø | 20 mm ext. Ø                                                                                           |                                                     | 2 studs                                                                                          | 2 studs                                                                                                       | 3 studs                                                                                                      |
|                 | Set of 20: 20 bolts + 20 nuts + 20 contact washers, class 8.8. The screws slide into the profile and are then locked in the desired position. |          | M8 set of 20                                                                                          |              |              | M8 sold in lots of 20 for connection of $\leq 25 \text{ mm}^2$ lugs to Linergy                         | 12 clip-on supports + N, L1, L2, L3, PE, PEN labels | Linerage LGYE busbars connection kit spare part                                                  | Set of 12 flat plates with 2 studs + 24 torque nuts + 24 contact washers. The plates slide along the profile. | Set of 8 flat plates with 3 studs + 24 torque nuts + 24 contact washers. The plates slide along the profile. |

| M8 bolts                        |                        |                                                                                                |
|---------------------------------|------------------------|------------------------------------------------------------------------------------------------|
|                                 |                        |  DD380737 eps |
| Linerage BS, 20 bolts class 8.8 | Characteristics        | Set of 20 bolts + 20 nuts + 40 contact washers.                                                |
|                                 | <b>Catalog numbers</b> |                                                                                                |
|                                 | M8 x 20                | LVS04782                                                                                       |
|                                 | M8 x 25                | LVS04783                                                                                       |
|                                 | M8 x 30                | LVS04784                                                                                       |
|                                 | M8 x 35                | LVS04785                                                                                       |
|                                 | M8 x 40                | LVS04786                                                                                       |
|                                 | M8 x 45                | LVS04787                                                                                       |
|                                 | M8 x 50                | LVS04788                                                                                       |

| Torque nuts       |                        |                                                                                                                                                                                     |
|-------------------|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   |                        |  DD380735 eps                                                                                    |
| 20 M8 torque nuts | Characteristics        | Can be used to obtain the correct tightening torque (28 Nm) recommended by the manufacturer, without using a torque wrench. Torque nuts may be used for all electrical connections. |
|                   | <b>Catalog numbers</b> | LVS04759                                                                                                                                                                            |

| Voltage tap-offs                          |                        |                                                                                                                                                |
|-------------------------------------------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
|                                           |                        |  DD380736 eps                                               |
| 20 Voltage tap-offs M10 pour 2 clips 6.35 | Characteristics        | For small lugs (on low-current cables or measurement tap-offs), insert a conducting washer (cat. no. LVS04775) between the busbar and the lug. |
|                                           | <b>Catalog numbers</b> | LVS04229                                                                                                                                       |



## Connections on Linergy LGYE &amp; LGY

| InA (A)      |                                 | Connecting to Linergy LGYE             | Connecting to Linergy LGY              |
|--------------|---------------------------------|----------------------------------------|----------------------------------------|
| 0 to 630     | Cable - Insulated flexible bars | 25 mm Linergy connection hardware used | 25 mm Linergy connection hardware used |
| 800 to 1250  | 5 mm bars                       | 25 mm Linergy connection hardware used | 25 mm Linergy connection hardware used |
| 1600 to 2500 | 5 mm or 10 mm bars              | Use of the 2 studs flat plate          | 39 mm Linergy connection hardware used |
| 3200 to 4000 | 10 mm bars                      | Use of the 3 studs flat plate          | -                                      |

**Note:** Jointing between 2 busbars (horizontal/vertical or horizontal/horizontal) must be mandatory done with studs plates.




## Linerger BW

Insulated busbars up to 630 A

## Power busbars

DD382576 eps



## Description





- ComPacT busbar, IPxxB, ready for installation (supplied complete with supports and end caps)
- Shaped busbar, threaded M6 with 25-mm pitch, can be cut with 200-mm pitch (150 mm for the 125 A)
- Busbar installed on insulating supports, screwed onto the rear uprights
- Wide selection of tested pre-wired connectors
- Clip-on covers to protect against direct contact (IPxxB). Can easily be cut to allow connections to pass through to the switchgear
- Ends protected by end caps.

Linerger BW (160 to 630 A) is fully compatible with seismic constraints. Just add a seismic kit (**LVS04130**) to Linergy BW 160/250/400.



## Linerger BW busbars

|                                    |                     | 125 A (1)               |          | 160 A                   |          | 250 A                   |          | 400 A                   |          | 630 A                   |          |
|------------------------------------|---------------------|-------------------------|----------|-------------------------|----------|-------------------------|----------|-------------------------|----------|-------------------------|----------|
| Rated peak withstand current       | (I <sub>pk</sub> )  | 20 kA                   |          | 30 kA                   |          | 30 kA                   |          | 52.5 kA                 |          | 52.5 kA                 |          |
| Rated insulation voltage           | (U <sub>i</sub> )   | 500 V AC                |          | 750 V AC                |          | 750 V AC                |          | 750 V AC                |          | 1000 V AC               |          |
| Rated impulse withstand voltage    | (U <sub>imp</sub> ) | 8 kV                    |          | 8 kV                    |          | 8 kV                    |          | 8 kV                    |          | 8 kV                    |          |
| Rated short-time current           | (I <sub>cc</sub> )  | 50 kA                   |          | 150 kA                  |          | 150 kA                  |          | 150 kA                  |          | 150 kA                  |          |
| Thermal stress                     | (I <sup>2</sup> .t) | 7.225 x 10 <sup>7</sup> |          | 1.000 x 10 <sup>8</sup> |          | 1.690 x 10 <sup>8</sup> |          | 4.000 x 10 <sup>8</sup> |          | 6.250 x 10 <sup>8</sup> |          |
| Rated short-time withstand current | (I <sub>cw</sub> )  | 8.5 kA rms/1 second     |          | 10 kA rms/1 second      |          | 13 kA rms/1 second      |          | 20 kA rms/1 second      |          | 25 kA rms/1 second      |          |
| Width (mm)                         |                     | 450                     | 750      | 1000                    | 1400     | 1000                    | 1400     | 1000                    | 1400     | 1000                    | 1400     |
| Catalog numbers                    | 3P                  | LVS04103                | LVS04107 | LVS04111                | LVS04116 | LVS04112                | LVS04117 | LVS04113                | LVS04118 | LVS04114                | LVS04119 |
|                                    | 4P                  | LVS04104                | LVS04108 | LVS04121                | LVS04126 | LVS04122                | LVS04127 | LVS04123                | LVS04128 | LVS04124                | LVS04129 |

## Accessories

|                     |                                                                                                                                  |                                                                                                                                        |                                                                                                                                                           |                                                                                                       |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
|                     | <br>DD382580 eps                              | <br>DD385348 eps                                    | <br>DD381395-LIN eps                                                  | <br>PB502375 eps |
|                     | <b>IPxxB tap-off terminals</b>                                                                                                   | <b>200 A connections</b>                                                                                                               | <b>IPxxB insulating covers</b>                                                                                                                            | <b>Class 8.8 fixing accessories</b>                                                                   |
|                     | 12 terminals<br>For 6 mm <sup>2</sup> (32 A max.) and 10 mm <sup>2</sup> cable (40 A max.)<br>Ui: 750 V<br>In: 55 A max. (2)     | 12 terminals<br>For one 1 to 16 mm <sup>2</sup> cable<br>Ui: 750 V<br>In: 55 A max. with one cable                                     | Covers which can be clipped on and cut to size are used to isolate the connectors of a connection with cables of cross-section 10 to 25 mm <sup>2</sup> . | M6 x 12 + 20 M6 contact washers.                                                                      |
| Used for connecting | <ul style="list-style-type: none"><li>■ All switchgear equipped with enclosed terminals</li><li>■ Linergy FM 160/200 A</li></ul> | <ul style="list-style-type: none"><li>■ All switchgear equipped with enclosed terminals</li><li>■ Linergy FM 63/80/160/200 A</li></ul> | <ul style="list-style-type: none"><li>■ Linergy FM 200 A</li></ul>                                                                                        |                                                                                                       |
| Set of              | 12                                                                                                                               | 12                                                                                                                                     | 4                                                                                                                                                         | 8                                                                                                     |
| Cat. no.            | LVS04151                                                                                                                         | LVS04152                                                                                                                               | LVS04021                                                                                                                                                  | LVS04150                                                                                              |
|                     |                                                                                                                                  |                                                                                                                                        |                                                                                                                                                           | LVS04158                                                                                              |

## Spare parts

|                                         |                                                                                                                       |          |          |          |          |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------|----------|----------|----------|----------|
|                                         |  <div>DD384952_L13-LIN-30.ai</div> |          |          |          |          |
|                                         | Busbar supports Linergy BW                                                                                            |          |          |          |          |
| Rated operational current at 40 °C (Ie) | 125 A                                                                                                                 | 160 A    | 250 A    | 400 A    | 630 A    |
| Composition                             | 2 busbar supports + 2 end caps + packet of fixing accessories.                                                        |          |          |          |          |
| Catalog numbers                         | -                                                                                                                     | LVS01210 | LVS01210 | LVS01210 | LVS01211 |
|                                         |  <div>DD384951_L13-LIN-30.ai</div> |          |          |          |          |
|                                         | IPxxB clip-on covers                                                                                                  |          |          |          |          |
| Width (mm)                              | 200                                                                                                                   |          |          |          |          |
| Set of                                  | 2                                                                                                                     |          |          |          |          |
| Catalog numbers                         | -                                                                                                                     | LVS01201 | LVS01201 | LVS01201 | LVS01201 |

Note: electrical characteristics > page G-41.


(1) Not compatible with seismic kit > page C-17, "Seismic Kit", page F-20




(2) I<sub>max</sub> = 55 A for connected cables.


## Linerger BW

Insulated busbars up to 630 A

## Power busbars

| Mounting | Vertical                                                                                                                                      |                                                                                                    |                                                                         |                                                                                            |                                                                                       | Horizontal                                                                                                                                     |                                                                                                    |                                                                    |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
|          |                                                                                                                                               |                                                                                                    |                                                                         |                                                                                            |                                                                                       |                                                             |                                                                                                    |                                                                    |
|          | Universal power supply units without connection                                                                                               |                                                                                                    | Connections for universal power supply block                            |                                                                                            |                                                                                       | Universal power supply units with connections                                                                                                  |                                                                                                    |                                                                    |
| Devices  | <b>Fixed</b><br>■ NSX100/250 horizontal rotary handle or motor mechanism<br>■ Fupact GS 100/160 vertical, Fupact ISFT100/250                  | <b>Fixed</b><br>■ NSX400/630 with or without Vigi in cubicle<br>■ INS-INV320/630                   | <b>Fixed</b><br>■ NSX100/250 toggle in cubicle<br>■ INS-INV250 vertical | <b>Fixed</b><br>■ NSX100/250 with or without Vigi in duct<br>■ INS-INV250 vertical in duct | <b>Fixed</b><br>■ NSX400/630 with or without Vigi in duct<br>■ INS-INV320/630 in duct | <b>Fixed</b><br>■ NSX100/250 horizontal with or without Vigi<br>■ INS-INV250 horizontal                                                        | <b>Fixed</b><br>■ NSX400 horizontal<br>■ INS-INV320/400 horizontal                                 | <b>Fixed</b><br>■ NSX630 horizontal<br>■ INS-INV500/630 horizontal |
| Cat. no. | LVS04061                                                                                                                                      | LVS04074                                                                                           | LVS04062                                                                | LVS04064                                                                                   | LVS04073                                                                              | LVS04060                                                                                                                                       | LVS04070                                                                                           | LVS04071                                                           |
| Devices  | <b>Plug-in base</b><br>■ NSX100/250 horizontal rotary handle or motor mechanism<br>■ Fupact GS 100/160 vertical, Fupact ISFT100/250           | <b>Plug-in base</b><br>■ NSX400/630 with or without Vigi in cubicle<br>■ INS-INV320/630            | To be made<br>Insulated flexible bars                                   |                                                                                            |                                                                                       | <b>Plug-in base</b><br>■ NSX100/250 horizontal rotary handle or motor mechanism in cubicle<br>■ Fupact GS 100/160 vertical, Fupact ISFT100/250 | <b>Plug-in base</b><br>■ NSX400/630 with or without Vigi in cubicle<br>■ INS-INV320/630 in cubicle | Insulated flexible bars<br>To be made                              |
| Cat. no. | LVS04061                                                                                                                                      | LVS04074                                                                                           | > page G-22                                                             |                                                                                            |                                                                                       | LVS04061                                                                                                                                       | LVS04074                                                                                           | > page G-22                                                        |
| Devices  | <b>Withdrawable</b><br>■ NSX100/250 horizontal rotary handle or motor mechanism in cubicle<br>■ Fupact GS100/160 vertical, Fupact ISFT100/250 | <b>Withdrawable</b><br>■ NSX400/630 with or without Vigi in cubicle<br>■ INS-INV320/630 in cubicle | To be made<br>Insulated flexible bars                                   |                                                                                            |                                                                                       | <b>Withdrawable</b><br>■ NSX100/250 horizontal rotary handle or motor mechanism in cubicle<br>■ Fupact GS100/160 vertical, Fupact ISFT100/250  | <b>Withdrawable</b><br>■ NSX400/630 with or without Vigi in cubicle<br>■ INS-INV320/630 in cubicle | Insulated flexible bars<br>To be made                              |
| Cat. no. | LVS04061                                                                                                                                      | LVS04074                                                                                           | > page G-22                                                             |                                                                                            |                                                                                       | LVS04061                                                                                                                                       | LVS04074                                                                                           | > page G-22                                                        |

| Prefabricated connections               |                                                                                     |                                                                                     |                                                                                                                                                                |                                                                                       |                         |
|-----------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------------------|
|                                         |  |  |                                                                            |  |                         |
|                                         | <b>Connections</b><br>35 mm² ferrule + 45° angled                                   |                                                                                     | <b>IPxxB 3/4P monobloc conn.</b><br>Quick connection on the busbar equipped with a male ferrule for enclosed terminals. Neutral identified by the colour blue. |                                                                                       | <b>Connections</b><br>- |
| Rated operational current at 40 °C (Ie) | 125 A                                                                               | 160 A                                                                               | 160 A                                                                                                                                                          | 160 A                                                                                 | 200 A                   |
| Width                                   | 230 mm                                                                              | 250 mm                                                                              | 440 mm                                                                                                                                                         | 150 mm                                                                                | -                       |
| Used for connecting                     | ■ NG125, INS-INV with enclosed terminals cat. no. <b>28947</b> or <b>28948</b>      |                                                                                     | ■ NG160 (located on left-hand side), Vigi NG160 (located in the middle),<br>■ NG125, INS-INV160, C120, iC120                                                   |                                                                                       | ■ Linergy FM 200 A      |
| Set of                                  | 4                                                                                   | 4                                                                                   | 1                                                                                                                                                              | 1                                                                                     | 4                       |
| Catalog numbers                         | LVS04145                                                                            | LVS04146                                                                            | LVS04148                                                                                                                                                       | LVS04147                                                                              | LVS04021                |

| Adaptation      |                                                                                     | Seismic kit for Linergy BW 160 up to 400 A (1)                                       |  |
|-----------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--|
|                 |  |  |  |
| Characteristics | PrismaSeT G Active adapter<br>W = 500 mm                                            | Use the seismic kit <b>LVS04130</b> when using Linergy BW                            |  |
| Catalog numbers | 2 x LVS03595                                                                        | Catalog numbers<br><b>LVS04130</b>                                                   |  |


**Note:** Electrical characteristics > page G-41.**Note:** The adapter **LVS03595** can be used for all mounting plates, except **LVS03030**.

(1) Not compatible with Linergy BW 125 A.

## Linerger DP

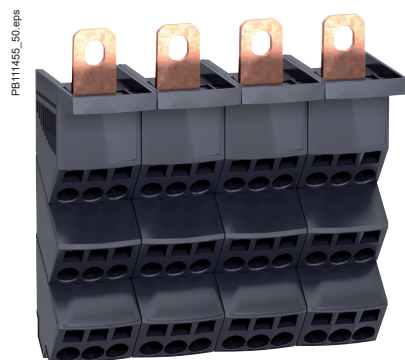Quick distribution blocks - ComPacT NSX and INS-INV up to 250 A

## Distribution blocks





## IEC 60947-7-1, IEC 61439-1 and 2

## Description

■ The Linergy DP quick distribution block is designed for installation directly downstream of ComPacT NSX and INS-INV up to 250 A. It can also be clipped onto a modular rail.

## Advantages

- It is quick to mount in the horizontal position. Electrical connections are made directly to the device terminals.
- It is the same width as the devices and does not take up any additional space in the switchboard.
- The connection terminals are slanted to facilitate cable entry and avoid exceeding the bending radius of the flexible and rigid cables.


| Quick distribution blocks for ComPacT devices |                                                                                                  |                                                                                                  |                                                                                                    | Additional block                                                                      |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Number of poles                               | 3P                                                                                               | 4P                                                                                               | 3P/4P                                                                                              |                                                                                       |
|                                               |  PB11454-15-eps |  PB11455-15-eps |  PB50251p-11-eps |   |
| Rated operational current (Ie)                | 250 A                                                                                            | 250 A                                                                                            | 250 A                                                                                              |                                                                                       |
| Rated peak withstand current (Ipk)            | 30 kA                                                                                            | 30 kA                                                                                            | 30 kA                                                                                              |                                                                                       |
| Rated short-time current (Icw)                | 8.5 kA rms/1 s                                                                                   | 8.5 kA rms/1 s                                                                                   |                                                                                                    |                                                                                       |
| Thermal stress (I <sup>2</sup> .t)            | 7.225 x 10 <sup>7</sup>                                                                          | 7.225 x 10 <sup>7</sup>                                                                          |                                                                                                    |                                                                                       |
| Total connection capacity, outgoing terminals | 27 connections:<br>6 x 10 <sup>2</sup> /phase<br>3 x 16 <sup>2</sup> /phase                      | 36 connections:<br>6 x 10 <sup>2</sup> /phase<br>3 x 16 <sup>2</sup> /phase                      | 2 connections:<br>2 x 35 <sup>2</sup> /pole                                                        |                                                                                       |
| Incomer terminals                             | 1 cable lug 120 mm <sup>2</sup> per pole                                                         |                                                                                                  |                                                                                                    |                                                                                       |
| Dimensions (H x W x D)                        | 105 x 138 x 63                                                                                   | 140 x 138 x 64                                                                                   |                                                                                                    |                                                                                       |
| Installation                                  | On mounting plate or DIN rail                                                                    |                                                                                                  | On mounting plate                                                                                  |                                                                                       |
| Product certifications                        | ASEFA                                                                                            |                                                                                                  |                                                                                                    |                                                                                       |
| Standard for installation inside PrismaSeT    | IEC 61439-1-2                                                                                    |                                                                                                  |                                                                                                    |                                                                                       |
| Glow-wire 60695-2-11                          | 960 °C                                                                                           |                                                                                                  |                                                                                                    |                                                                                       |
| Catalog numbers                               | LVS04033                                                                                         | LVS04034                                                                                         | LVS04155 (3P)<br>LVS04156 (4P)                                                                     |  |

## Technical Data


## Common characteristics

|                                                              |                                                                                                                                              |
|--------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Rated conditional short-circuit current of an assembly (Isc) | The reinforced breaking capacity due to cascading in circuit-breaker combinations is maintained. The worst-case situations have been tested. |
| Rated insulation voltage (Ui)                                | 750 V AC                                                                                                                                     |
| Rated operational voltage (Ue)                               | 690 V AC                                                                                                                                     |
| Rated impulse withstand voltage (Uimp)                       | 8 kV                                                                                                                                         |
| Network frequency                                            | 50/60 Hz                                                                                                                                     |
| Degree of protection                                         | IPxxB                                                                                                                                        |
| Degree of pollution                                          | 3                                                                                                                                            |
| Overvoltage category                                         | III                                                                                                                                          |
| <b>Additional technical characteristics</b>                  |                                                                                                                                              |
| Reference temperature                                        | 40 °C                                                                                                                                        |
| Operating temperature                                        | -25 °C to 55 °C                                                                                                                              |

## Installation



It can also be mounted downstream of vertically mounted **ComPacT NSX100/250** and **ComPacT INS-INV250** devices in the enclosures. In this case, the Linergy DP is mounted on a depth-adjustable modular rail.



Directly on the mounting plates of horizontally mounted **ComPacT NSX100/250** and **ComPacT INS-INV250** devices in the enclosures.


For details on mounting plates, refer [pages E-20, E-21, E-22, E-23, and E-24](#).

**Note:** Electrical characteristics > [page G-41](#).

## Linerger DP

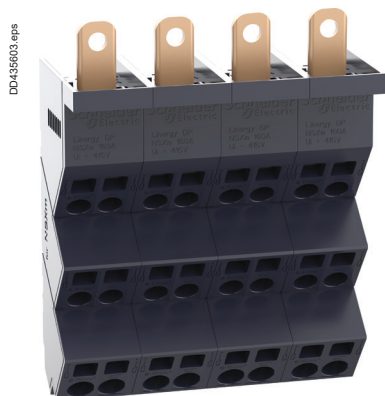Quick distribution blocks - ComPacT NSXm up to 160 A

## Distribution blocks



## IEC 60947-7-1, IEC 61439-1 and 2


## Description

■ The Linergy DP quick distribution block is designed for installation directly downstream of ComPacT NSXm up to 160 A. It can also be clipped onto a modular rail.

## Advantages

- It is quick to mount in the horizontal position. Electrical connections are made directly to the device terminals.
- It is the same width as the devices and does not take up any additional space in the switchboard.
- The connection terminals are slanted to facilitate cable entry and avoid exceeding the bending radius of the flexible and rigid cables.

## Quick distribution blocks for ComPacT devices

| Number of poles                               | 3P                                                                                | 4P                                                                                  |
|-----------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                               |  |  |
| Rated operational current (Ie)                | 160 A                                                                             | 160 A                                                                               |
| Rated peak withstand current (Ipk)            | 20 kA                                                                             | 20 kA                                                                               |
| Rated short-time current (Icc)                | 70 kA                                                                             | 70 kA                                                                               |
| Thermal stress (I².t)                         | 4.7 x 10⁶ A²S                                                                     | 4.7 x 10⁶ A²S                                                                       |
| Total connection capacity, outgoing terminals | 18 connections:<br>4 x 10²/phase<br>2 x 16²/phase                                 | 24 connections:<br>4 x 10²/phase<br>2 x 16²/phase                                   |
| Incomer terminals                             | 1 cable lug 70 mm² per pole                                                       |                                                                                     |
| Dimensions (H x W x D)                        | 140 X 81 X 58 mm                                                                  | 140 X 108 X 58 mm                                                                   |
| Installation                                  | On mounting plate or DIN rail                                                     |                                                                                     |
| Product certifications                        | ASEFA                                                                             |                                                                                     |
| Standard for installation inside PrismaSeT    | IEC 61439-1-2                                                                     |                                                                                     |
| Glow-wire 60695-2-11                          | 960 °C                                                                            |                                                                                     |
| Catalog numbers                               | LVS04038                                                                          | LVS04039                                                                            |

## Technical Data

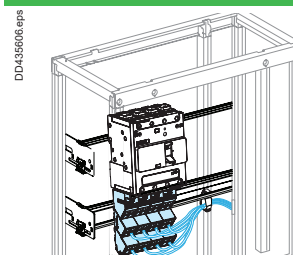
## Common characteristics

|                                                              |                                                                                                                                              |
|--------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Rated conditional short-circuit current of an assembly (Isc) | The reinforced breaking capacity due to cascading in circuit-breaker combinations is maintained. The worst-case situations have been tested. |
| Rated insulation voltage (Ui)                                | 800 V AC                                                                                                                                     |
| Rated operational voltage (Ue)                               | 690 V AC                                                                                                                                     |
| Rated impulse withstand voltage (Uimp)                       | 8 kV                                                                                                                                         |
| Network frequency                                            | 50/60 Hz                                                                                                                                     |
| Degree of protection                                         | IPxxB                                                                                                                                        |
| Degree of pollution                                          | 3                                                                                                                                            |
| Overvoltage category                                         | III                                                                                                                                          |


## Additional technical characteristics

|                       |                 |
|-----------------------|-----------------|
| Reference temperature | 40 °C           |
| Operating temperature | -25 °C to 55 °C |

## Installation



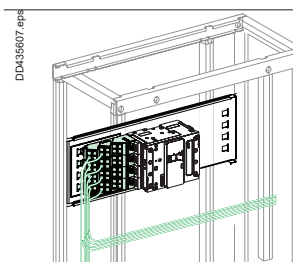It can also be mounted downstream of vertically mounted **ComPacT NSXm** devices in the enclosures. In this case, the Linergy DP is mounted on a depth-adjustable modular rail.



Directly on the mounting plates of horizontally mounted **ComPacT NSXm** devices in the enclosures.

For details on mounting plates, refer [page E-35](#).

**Note:** Electrical characteristics > [page G-41](#).

## Linerger FC

Feeders for ComPacT NSX and INS-INV up to 250 A

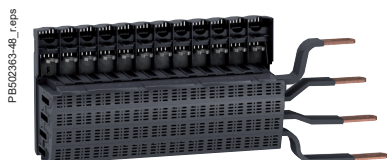
## Device feeders

## IEC 61439-1 and 2

## Description


Linerger FC is an insulated horizontal distribution block. It connects directly to the mounting plate and can supply:

- Three 4P and four 3P ComPacT NSX circuit breakers, whatever the ratings (100, 160 or 250 A), the operating systems (toggle, rotary handle, motor mechanism), whether fixed or plug-in, front or rear connection (the circuit breakers must be equipped with long terminal shields downstream)
- Three 4P or four 3P ComPacT INS-INV switch-disconnectors, whatever the ratings (100, 160 or 250 A), whether front or rear connection.
- The design and small size blend thoroughly with the devices.
- It can be supplied by Linergy BS or Linergy LGY busbars positioned to the left or right.
- Fully insulated, Linergy FC helps to protect life and property. Numerous and well distributed vents ensure natural convection and optimum cooling of the conductors.
- The circuit breakers can be easily connected from the front. It is simple to interchange a device or to add a device in a reserve slot.
- There are markings (N, L1, L2, L3) on the front and the sides for the phases.
- The running of auxiliary cables between the devices and the corresponding terminal blocks is also taken into account. Spacious trunking is built into the blocks for the auxiliary wiring.




|                                                             | ComPacT NSX100/250 & INS-INV250 - Toggle, fixed                                                        |          | ComPacT NSX100/250 - Rotary handle, motor mechanism - plug-in, fixed, ComPacT NSX100/250 - All controls, withdrawable |          | ComPacT NSX100/250 & INS-INV250 - All controls, fixed and withdrawable                                   |              |
|-------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|----------|-----------------------------------------------------------------------------------------------------------------------|----------|----------------------------------------------------------------------------------------------------------|--------------|
|                                                             | <br>PB60207-48_raps |          | <br>DD436608_raps                 |          | <br>PB60206-32_raps |              |
|                                                             | Linerger FC with prefabricated connections by insulated flexible bars (1)                              |          | Linerger FC with prefabricated connections (1)                                                                        |          | Linerger FC without prefabricated connections (1)                                                        |              |
| Number of poles                                             | 3P                                                                                                     | 4P       | 3P                                                                                                                    | 4P       | 3P                                                                                                       | 4P           |
| Connection to                                               | Linerger LGY busbars                                                                                   |          | Linerger BS, Linerger LGY or Linerger LGYE busbars                                                                    |          | Linerger BS, Linerger LGY or Linerger LGYE busbars                                                       |              |
| Number of devices                                           | 4                                                                                                      | 3        | 4                                                                                                                     | 3        | 4                                                                                                        | 3            |
| Composition                                                 | Self-adhesive labels to mark the phases for connections to the busbars.                                |          |                                                                                                                       |          |                                                                                                          |              |
| Mounting plates                                             |                                                                                                        |          |                                                                                                                       |          |                                                                                                          |              |
| Toggle, Fixed, NSX100/250                                   | LVS03420                                                                                               | LVS03420 | -                                                                                                                     | -        | LVS03420                                                                                                 | LVS03420     |
| Toggle, Plug-in, NSX100/250                                 | -                                                                                                      | -        | LVS03423                                                                                                              | LVS03423 | LVS03423                                                                                                 | LVS03423     |
| Rotary handle, motor mechanism - plug-in, Fixed, NSX100/250 | -                                                                                                      | -        | LVS03422                                                                                                              | LVS03422 | LVS03422                                                                                                 | LVS03422     |
| Cat. no.                                                    | LVS04403                                                                                               | LVS04404 | LVS04405                                                                                                              | LVS04406 | LVS04407 (2)                                                                                             | LVS04408 (2) |


## Implementation

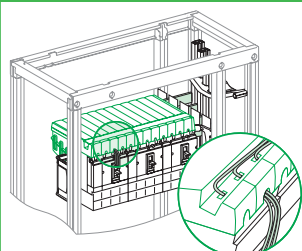

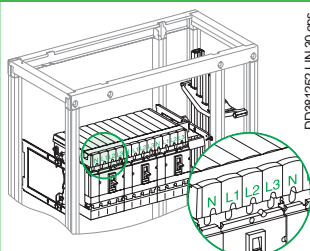Auxiliary wires running in the built-in trunking.



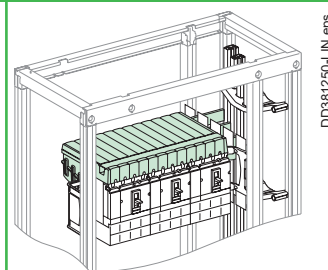Phase marking on the front of the distribution block.



(1) The connection of a Linergy FC distribution block using pre-wired connectors or insulated flexible bars is not compatible with Form 2 partitioning (LVS04922). In this case, use the form 2 restoration kit (LVS04924).

(2) For the connection, use insulated flexible bars, 32 x 8 mm cat. no. LVS04753; Each connection must not be longer than 500 mm. This size is validated with Schneider Electric insulated flexible bars.




## Linerger FC

Feeders for ComPacT NSX and INS-INV up to 250 A

## Device feeders

## Accessories



## Tooth caps

The caps block off the reserve terminals on a Linergy FC distribution block. Made of an insulating material, they simply clip on from the front.

## Catalog numbers

LVS04809

## Characteristics

## Common characteristics

|                                                                |        |                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated operational current at 40°                               | (Ie)   | Distribution-block derating follows the normal derating curves of ComPacT NSX and INS-INV                                                                                                                                                                                                                                                                                  |
| Rated conditional short-circuit current of an assembly         | (Isc)  | The reinforced breaking capacity due to cascading in circuit breaker combinations is maintained.<br>The worst-case situations have been tested.<br>The electrical characteristics are perfectly compatible with the connected devices.<br>Neither the temperature derating curves nor the performance levels of the circuit breakers and switch-disconnectors are altered. |
| Rated insulation voltage                                       | (Ui)   | 750 V AC                                                                                                                                                                                                                                                                                                                                                                   |
| Rated operational voltage                                      | (Ue)   | 690 V AC                                                                                                                                                                                                                                                                                                                                                                   |
| Rated impulse withstand voltage                                | (Uimp) | 8 kV                                                                                                                                                                                                                                                                                                                                                                       |
| Rated peak withstand current                                   | (Ipk)  | 50 kA rms                                                                                                                                                                                                                                                                                                                                                                  |
| Rated short-time current with upstream protection of 85 kA lcc | (Icc)  | 85 kA                                                                                                                                                                                                                                                                                                                                                                      |
| Thermal stress                                                 | (I².t) | 2.500 x 10⁷                                                                                                                                                                                                                                                                                                                                                                |
| Rated conditional short-circuit current of an assembly         |        | Short-circuit withstand current compatible with the breaking capacity of the ComPacT NSX circuit breakers connected to the distribution block.                                                                                                                                                                                                                             |

## Linerger FC selection table for special cases

For most installations, the temperature around the switchboard is 40 °C, corresponding to an average temperature of 60 °C inside the switchboard.

Under certain conditions, the temperature inside the switchboard may be different.

## (A) Rated operational current as a function of the temperature inside the switchboard

| Temperature (°C)    |    | 40  | 45  | 50  | 55  | 60  | 65  | 70  |
|---------------------|----|-----|-----|-----|-----|-----|-----|-----|
| I <sub>nc</sub> (A) | 3P | 800 | 800 | 775 | 750 | 725 | 700 | 675 |
|                     | 4P | 675 | 675 | 655 | 635 | 615 | 595 | 570 |

To obtain the maximum permissible current for the linerger FC, apply the diversity factor K:

- Linergy FC 3P: K = 0.8
- Linergy FC 4P: RDF = 0.9.

G



Linergy FC

Feeders for Com**PacT** NSXm up to 160 A

Device feeders

IEC 61439-1 and 2

Description

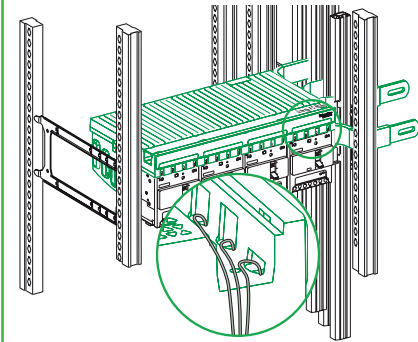
Linergy FC is an insulated horizontal distribution block. It connects directly to the mounting plate and can supply:

- Four 4P and five 3P ComPacT NSXm circuit breakers (four 3P and 4P for ComPacT NSXm Vigi), whatever the ratings (63, 100 or 160 A) with toggle and direct rotary handle operating mechanism.
- The design and small size blend thoroughly with the devices.
- It can be supplied by Linergy BS, Linergy LGYE and Linergy LGY busbars positioned to the left or right.
- Fully insulated, Linergy FC helps to protect life and property. Numerous and well distributed vents ensure natural convection and optimum cooling of the conductors.
- The circuit breakers can be easily connected from the front. It is simple to interchange a device or to add a device in a reserve slot.
- There are markings (N, L1, L2, L3) on the front and the sides for the phases.
- The running of auxiliary cables between the devices and the corresponding terminal blocks is also considered. Spacious trunking is built into the blocks for the auxiliary wiring.




|                   | ComPacT NSXm - Toggle (with Everlink terminal)                                    |          | ComPacT NSXm - Toggle/ DRH (with Everlink terminal)                               |                                                                                     |                                                  |              |
|-------------------|-----------------------------------------------------------------------------------|----------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------|--------------|
|                   |  |          |  |  |                                                  |              |
|                   | Linergy FC with prefabricated connections by insulated flexible bars (1)          |          | Linergy FC with prefabricated connections (1)                                     |                                                                                     | Linergy FC without prefabricated connections (1) |              |
| Number of poles   | 3P                                                                                | 4P       | 3P                                                                                | 4P                                                                                  | 3P                                               | 4P           |
| Connection to     | Linergy LGY busbars                                                               |          | Linergy BS and Linergy LGYE busbars                                               |                                                                                     |                                                  |              |
| Number of devices | 5 (2)                                                                             | 4        | 5 (2)                                                                             | 4                                                                                   | 5 (2)                                            | 4            |
| Mounting plates   | LVS03416                                                                          | LVS03416 | LVS03416                                                                          | LVS03416                                                                            | LVS03416                                         | LVS03416     |
| Cat. no.          | LVS04410                                                                          | LVS04411 | LVS04412                                                                          | LVS04413                                                                            | LVS04419 (3)                                     | LVS04420 (3) |
|                   | LVS04416 (3)                                                                      |          | LVS04417 (3)                                                                      |                                                                                     | LVS04418 (3) (4)                                 |              |

Implementation



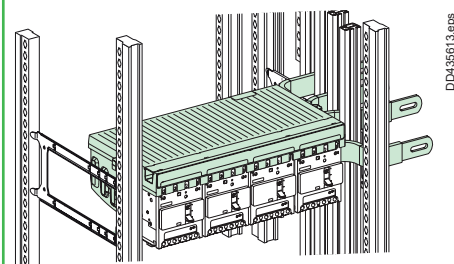Auxiliary wires running in the built-in trunking.



(1) The connection of a Linergy FC distribution block using pre-wired connectors or insulated flexible bars is not compatible with Form 2 partitioning (LVS04922). In this case, use the form 2 restoration kit (LVS04924).

(2) Linergy FC configuration having NSXm with Vigi can mount four devices in a row for both 3P and 4P.

(3) For the connection, use insulated flexible bars, 32 x 6 mm cat. no. LVS04752; Each connection must not be longer than 500 mm. This size is validated with Schneider Electric insulated flexible bars.


(4) The Catalog reference number is used only with NSXm Vigi.

## Linerger FC

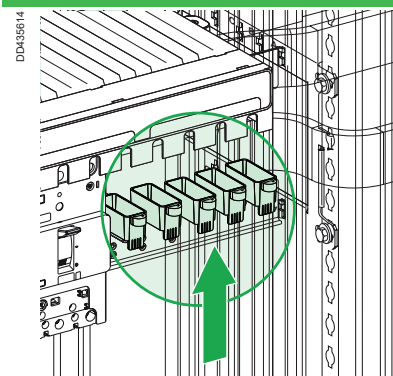Feeders for ComPacT NSXm up to 160 A

## Device feeders

## Accessories



## Tooth caps

The caps block off the reserve terminals on a Linergy FC distribution block. Made of an insulating material, they simply clip on and install the screw from the front.

## Catalog numbers

LVS04810

## Characteristics

## Common characteristics

|                                                                |        |                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated operational current at 40°                               | (Ie)   | Distribution-block derating follows the normal derating curves of ComPacT NSXm                                                                                                                                                                                                                                                                                             |
| Rated conditional short-circuit current of an assembly         | (Isc)  | The reinforced breaking capacity due to cascading in circuit breaker combinations is maintained.<br>The worst-case situations have been tested.<br>The electrical characteristics are perfectly compatible with the connected devices.<br>Neither the temperature derating curves nor the performance levels of the circuit breakers and switch-disconnectors are altered. |
| Rated insulation voltage                                       | (Ui)   | 800 V AC                                                                                                                                                                                                                                                                                                                                                                   |
| Rated operational voltage                                      | (Ue)   | 690 V AC                                                                                                                                                                                                                                                                                                                                                                   |
| Rated impulse withstand voltage                                | (Uimp) | 8 kV                                                                                                                                                                                                                                                                                                                                                                       |
| Rated peak withstand current                                   | (Ipk)  | 18 kA                                                                                                                                                                                                                                                                                                                                                                      |
| Rated short-time current with upstream protection of 85 kA Icc | (Icc)  | 50 kA                                                                                                                                                                                                                                                                                                                                                                      |
| Thermal stress                                                 | (I².t) | 4.5 x 10⁶ A²S                                                                                                                                                                                                                                                                                                                                                              |
| Rated conditional short-circuit current of an assembly         |        | Short-circuit withstand current compatible with the breaking capacity of the ComPacT NSXm circuit breakers connected to the distribution block.                                                                                                                                                                                                                            |

## Linerger FC selection table for special cases

For most installations, the temperature around the switchboard is 40 °C, corresponding to an average temperature of 60 °C inside the switchboard.


Under certain conditions, the temperature inside the switchboard may be different.

## (A) Rated operational current as a function of the temperature inside the switchboard

| Ambient Air Temperature outside panel (°C) |    | 35  | 40  | 45  | 50  |
|--------------------------------------------|----|-----|-----|-----|-----|
| IP31 (A)                                   | 3P | 600 | 575 | 550 | 525 |
|                                            | 4P | 500 | 480 | 460 | 440 |
| IP55 (A)                                   | 3P | 515 | 500 | 475 | 450 |
|                                            | 4P | 460 | 440 | 420 | 400 |

## Insulated flexible bars

## Secondary distribution



The insulated flexible bars are tested in a type-tested switchboard environment. Their design takes into account the switchboard architecture where they are often in close proximity to a protection device (circuit breaker or fuse) with significant heat losses.

The sizes for the flexible bars indicated below take into account the heat losses of Schneider Electric devices in a PrismaSeT switchboard.

## Characteristics

|                                                           |         |
|-----------------------------------------------------------|---------|
| Length                                                    | 1800 mm |
| Rated insulation voltage (Ui)                             | 1000 V  |
| Maximum withstand temperature for the insulating material | 125 °C  |

## Connection between device and busbars

The flexible bars are determined taking into account the connected device, whatever the internal temperature of the switchboard.

The bar sizes indicated below take into account the derating curves of devices.

| Devices          | Size (mm)          | Catalog number |
|------------------|--------------------|----------------|
| NSX100           | 20 x 2             | LVS04742       |
| NSX160/250       | 20 x 3 (1)         | LVS04743       |
| NSX400           | 32 x 5             | LVS04751       |
| NSX630           | 32 x 8 (2)         | LVS04753       |
| NSX100 ELCB      | 20 x 2             | LVS04742       |
| NSX160/250 ELCB  | 20 x 3 (1)         | LVS04743       |
| NSX400 ELCB      | 32 x 5             | LVS04751       |
| NSX630 ELCB      | 32 x 8 (2)         | LVS04753       |
| INS-INV125/160   | 20 x 2             | LVS04742       |
| INS-INV250       | 20 x 3             | LVS04743       |
| INS-INV400       | 32 x 5             | LVS04751       |
| INS-INV630       | 32 x 6             | LVS04752       |
| FM 200 A Linergy | 20 x 3             | LVS04743       |
| FC 3P Linergy    | 32 x 8 (2) (3) (4) | LVS04753       |
| FC 4P Linergy    | 32 x 8 (2) (3) (4) | LVS04753       |
| Fupact 250       | 24 x 5             | LVS04746       |
| Fupact 400       | 32 x 5             | LVS04751       |
| Fupact 630       | 32 x 8 (2)         | LVS04753       |

(1) To connect a ComPacT NSX250 and NSX150 ELCB to Linergy BW busbars, use a 24 x 5 mm flexible bar (LVS04746).

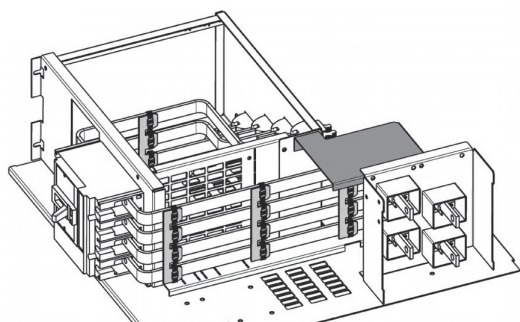
(2) The insulated flexible bars is not compatible with Form 2 partitioning (LVS04922). In this case, use the form 2 restoration kit LVS04924 > page H-5.

(3) In case of use of 32 x 6 insulated flexible bar, please contact Schneider Electric.


(4) Max length 500 mm per connection

The references **87646** (3P) and **87647** (4P) can be used up to 250 A, when binding of insulated flexible bars, to withstand Icw.

**Nota :** For NSXm connection, there is no flat insulated flexible bar available. Choose a cable prefabricated connection > page E-35 and page E-36



### Secondary distribution

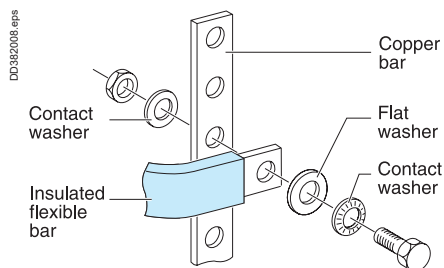

#### Connection between busbars

Copper flexible bars are designed for connections between busbars taking into account the following characteristics:

- a maximum temperature of 60 °C inside the switchboard. This corresponds to the average temperature inside a switchboard for an ambient temperature of 35 °C
- the maximum withstand temperature for the insulating material is 125 °C.

| Ie (1) max | Size (mm) | Catalog numbers |
|------------|-----------|-----------------|
| 200 A      | 20 x 2    | LVS04742        |
| 250 A      | 20 x 3    | LVS04743        |
| 400 A      | 24 x 5    | LVS04746        |
| 520 A      | 32 x 5    | LVS04751        |
| 580 A      | 32 x 6    | LVS04752        |
| 660 A      | 32 x 8    | LVS04753        |

(1) Rated operational current.

#### Designing connections

> page G-22.

## Linerdy DX

## Quick distribution blocks

## Distribution blocks

## IEC 60947-7-1, CEI 61439-2

## Description

- Downstream circuits are connected from the front, to spring terminals.
- Contact pressure automatically adapts to the size of the conductor.
- Contacts are insensitive to vibrations and thermal variations.
- Only one cable (flexible or rigid) can be inserted per terminal.

PB10449B-7 eps



PB111415-19 eps



## Quick distribution blocks

| Number of poles                                              | 4P, upstream incoming                                                                                                                                                                      | 4P, downstream incoming                                                             |
|--------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                              |                                                                                                           |  |
| Rated operational current at 40° (Ie)                        | 63 A                                                                                                                                                                                       | 63 A                                                                                |
| Rated conditional short-circuit current of an assembly (Isc) | The reinforced breaking capacity due to cascading in circuit breaker combinations is maintained. The worst-case situations have been tested. 150 kA with upstream protection of 150 kA Icc |                                                                                     |
| Rated peak withstand current (Ipk)                           | 10 kA                                                                                                                                                                                      | 10 kA                                                                               |
| Rated insulation voltage (Ui)                                | 500 V AC                                                                                                                                                                                   | 500 V AC                                                                            |
| Rated operational voltage (Ue)                               | 440 V AC                                                                                                                                                                                   | 440 V AC                                                                            |
| Rated impulse withstand voltage (Uimp)                       | 6 kV                                                                                                                                                                                       | 6 kV                                                                                |
| Rated short-time current (Icc)                               | 150 kA                                                                                                                                                                                     | 150 kA                                                                              |
| Thermal stress (I².t)                                        | 9.03 x 10⁶                                                                                                                                                                                 | 9.03 x 10⁶                                                                          |
| Rated operational frequency                                  | 50/60 Hz                                                                                                                                                                                   | 50/60 Hz                                                                            |
| Degree of protection                                         | IPxxB                                                                                                                                                                                      | IPxxB                                                                               |
| Incoming terminals                                           | 1 tunnel terminal 25²/phase                                                                                                                                                                | 1 tunnel terminal 25²/phase                                                         |
| Total connection capacity, outgoing terminals                | 24 connections:<br>4 x 6²/phase<br>12 x 6²/neutre                                                                                                                                          | 24 connections:<br>4 x 6²/phase<br>12 x 6²/neutre                                   |
| Dimensions (H x W x D)                                       | 96.5 x 72 x 62<br>8 x 9 mm pitch                                                                                                                                                           | 96.5 x 72 x 62<br>8 x 9 mm pitch                                                    |
| Installation                                                 | Clipped onto a DIN rail                                                                                                                                                                    | Clipped onto a DIN rail                                                             |
| Others                                                       |                                                                                                                                                                                            |                                                                                     |
| Standard for installation inside PrismaSeT                   | IEC 61439-2                                                                                                                                                                                | IEC 61439-2                                                                         |
| Glow-wire 60695-2-11                                         | 960 °C                                                                                                                                                                                     | 960 °C                                                                              |
| Degree of pollution                                          | 3                                                                                                                                                                                          | 3                                                                                   |
| Catalog numbers                                              | LVS04040                                                                                                                                                                                   | LVS04041                                                                            |

## Accessories

|                 |   |   |
|-----------------|---|---|
| Catalog numbers | - | - |
|-----------------|---|---|

## Linerger DX

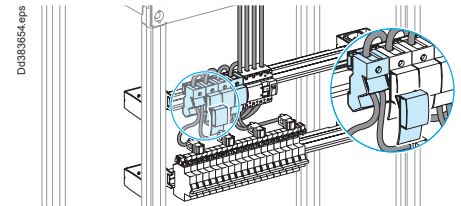
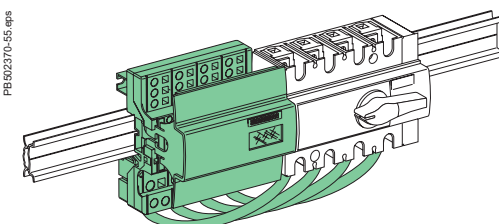
## Quick distribution blocks

## Distribution blocks

## Advantages

- A reliable electrical connection, no maintenance required (tightness guaranteed over time).
- Quick connection.
- Easy phase balancing.
- Ease of rewiring if the switchboard is expanded or modified.

| 4P                                                                                                                                                                                               |                                                                                                                                                        | 1P                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
|                                                                                                                 |                                                                       |                        |
| 125 A                                                                                                                                                                                            | 160 A                                                                                                                                                  | 160 A                                                                                                     |
| The reinforced breaking capacity due to cascading in circuit breaker combinations is maintained.<br>The worst-case situations have been tested.<br>150 kA with upstream protection of 150 kA lcc |                                                                                                                                                        |                                                                                                           |
| 20 kA                                                                                                                                                                                            | 20 kA                                                                                                                                                  | 24 kA                                                                                                     |
| 750 V AC                                                                                                                                                                                         | 750 V AC                                                                                                                                               | 750 V AC                                                                                                  |
| 690 V AC                                                                                                                                                                                         | 690 V AC                                                                                                                                               | 690 V AC                                                                                                  |
| 8 kV                                                                                                                                                                                             | 8 kV                                                                                                                                                   | 8 kV                                                                                                      |
| 150 kA                                                                                                                                                                                           | 150 kA                                                                                                                                                 | 150 kA                                                                                                    |
| $2.025 \times 10^7$                                                                                                                                                                              | $2.025 \times 10^7$                                                                                                                                    | $3.025 \times 10^7$                                                                                       |
| 50/60 Hz                                                                                                                                                                                         | 50/60 Hz                                                                                                                                               | 50/60 Hz                                                                                                  |
| IPxxB                                                                                                                                                                                            | IPxxB                                                                                                                                                  | IPxxB                                                                                                     |
| 1 tunnel terminal 35 <sup>2</sup> /phase                                                                                                                                                         | Supplied with a prefabricated flexible connection equipped with tunnel terminals (for INS-INV100/160 use adaptor <b>28947</b> (3P) <b>28948</b> (4P))  | 1 tunnel terminal 70 <sup>2</sup> /phase                                                                  |
| 52 connections:<br>7 x 4 <sup>2</sup> /phase<br>3 x 6 <sup>2</sup> /phase<br>2 x 10 <sup>2</sup> /phase<br>1 x 16 <sup>2</sup> /phase (screw terminal)                                           | 52 connections:<br>7 x 4 <sup>2</sup> /phase<br>3 x 6 <sup>2</sup> /phase<br>2 x 10 <sup>2</sup> /phase<br>1 x 16 <sup>2</sup> /phase (screw terminal) | 6 connections:<br>6 x 16 <sup>2</sup> /phase                                                              |
| 127 x 108 x 48<br>12 x 9 mm pitch                                                                                                                                                                | 127 x 108 x 48<br>12 x 9 mm pitch                                                                                                                      | 95 x 36 x 70<br>4 x 9 mm pitch                                                                            |
| Screwed to plain or slotted backplate or onto DIN rail                                                                                                                                           | Screwed to plain or slotted backplate or onto DIN rail                                                                                                 | Onto DIN rail                                                                                             |
| Possible to combine 2 terminal blocks<br>(2 <sup>nd</sup> terminal block supplied from enclosed terminals in the 1 <sup>st</sup> , I <sub>max</sub> of 2 <sup>nd</sup> terminal block: 80 A)     |                                                                                                                                                        |                                                                                                           |
| IEC 61439-2                                                                                                                                                                                      | IEC 61439-2                                                                                                                                            | IEC 61439-2                                                                                               |
| 960 °C                                                                                                                                                                                           | 960 °C                                                                                                                                                 | 960 °C                                                                                                    |
| 3                                                                                                                                                                                                | 3                                                                                                                                                      | 3                                                                                                         |
| <b>LVS04045</b>                                                                                                                                                                                  | <b>LVS04046 (1)</b>                                                                                                                                    | <b>LVS04031</b>                                                                                           |
| 4 x 125 A flexible connections, L = 240 mm with 1 end fitting for tunnel terminals.                                                                                                              |                                                                                                                                                        | 4 x 160 A flexible connections, L = 380 mm with 2 x 45 mm <sup>2</sup> end fittings for tunnel terminals. |
| <b>LVS04047 (1)</b>                                                                                                                                                                              | -                                                                                                                                                      | <b>LVS04149</b>                                                                                           |



**Note:** electrical characteristics > page G-41.


(1) To be adapted with reference **28947** and **28948** for INS-INV160.



# Linerger FM
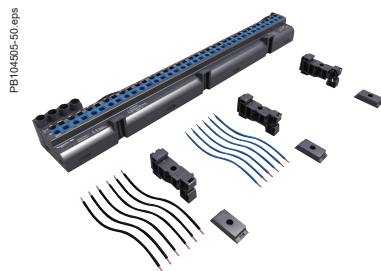
## Quick device feeders

## Device feeders




### Description

- Distribution over full rows of modular devices.
- The distribution block is generally supplied by busbars in enclosures and cubicles.
- Easy phase balancing.
- Mix of devices and functions in the same row.
- Installation  $\geq 160$  A: clipped onto the back of a modular rail or screwed onto a solid or pre-slotted plate.


### Distribution blocks

| Number of poles                                                   |                                 | 4P                                                                                                                                                                                                                                                                                                                                                                         | 4P                                                                                  |
|-------------------------------------------------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                   |                                 |                                                                                                                                                                                                                                                                                           |  |
|                                                                   |                                 | <b>63 A</b>                                                                                                                                                                                                                                                                                                                                                                | <b>80 A</b>                                                                         |
| Rated peak withstand current                                      | (I <sub>pk</sub> )              | 15 kA                                                                                                                                                                                                                                                                                                                                                                      | 13 kA                                                                               |
| Rated conditional short-circuit current of an assembly            | (I <sub>sc</sub> )              | The cascading reinforced breaking capacity when combining circuit breakers is maintained. The worst-case scenarios have been tested. The characteristics are exactly right for the connected devices. Circuit breakers and switches still have their temperature derating curves, and their whole performance is maintained. 150 kA with upstream protection of 150 kA Icc |                                                                                     |
| Rated insulation voltage                                          | (U <sub>i</sub> )               | 500 V AC                                                                                                                                                                                                                                                                                                                                                                   | 500 V AC                                                                            |
| Rated voltage                                                     | (U <sub>e</sub> )               | 440 V AC                                                                                                                                                                                                                                                                                                                                                                   | 440 V AC                                                                            |
| Rated impulse withstand voltage                                   | (U <sub>imp</sub> )             | 6 kV                                                                                                                                                                                                                                                                                                                                                                       | 8 kV                                                                                |
| Maximum current                                                   | (I <sub>max</sub> )             | -                                                                                                                                                                                                                                                                                                                                                                          | -                                                                                   |
| Thermal stress                                                    | (I <sup>2</sup> .t)             | 9.03 x 10 <sup>6</sup>                                                                                                                                                                                                                                                                                                                                                     | 9.03 x 10 <sup>6</sup>                                                              |
| Rated operational frequency                                       |                                 | 50/60 Hz                                                                                                                                                                                                                                                                                                                                                                   | 50/60 Hz                                                                            |
| Degree of protection                                              |                                 | IPxxB                                                                                                                                                                                                                                                                                                                                                                      | IPxxB                                                                               |
| Width                                                             | 9 mm modules                    | 24                                                                                                                                                                                                                                                                                                                                                                         | 48                                                                                  |
|                                                                   | 18 mm modules                   | 12                                                                                                                                                                                                                                                                                                                                                                         | 24                                                                                  |
| Supply at incoming terminals                                      |                                 | Enclosed terminals for cables up to 25 mm <sup>2</sup>                                                                                                                                                                                                                                                                                                                     |                                                                                     |
| Downstream connection capacity, cable to be used without ferrules | Max. 4 mm <sup>2</sup>          | Phase                                                                                                                                                                                                                                                                                                                                                                      | 6                                                                                   |
|                                                                   |                                 | Neutral                                                                                                                                                                                                                                                                                                                                                                    | 4                                                                                   |
|                                                                   | Max. 6 mm <sup>2</sup>          | Phase                                                                                                                                                                                                                                                                                                                                                                      | 2                                                                                   |
|                                                                   |                                 | Neutral                                                                                                                                                                                                                                                                                                                                                                    | 4                                                                                   |
|                                                                   | Max. 10 mm <sup>2</sup>         | Phase                                                                                                                                                                                                                                                                                                                                                                      | -                                                                                   |
|                                                                   |                                 | Neutral                                                                                                                                                                                                                                                                                                                                                                    | -                                                                                   |
| Accessories included                                              | Pre-stripped copper connections | 10 x 4 mm <sup>2</sup> + 6 x 6 mm <sup>2</sup> (W = 100 mm)                                                                                                                                                                                                                                                                                                                |                                                                                     |
|                                                                   | Protection cover                | -                                                                                                                                                                                                                                                                                                                                                                          |                                                                                     |
|                                                                   | Fixing legs                     | 2                                                                                                                                                                                                                                                                                                                                                                          |                                                                                     |
| Catalog numbers                                                   |                                 | <b>LVS04008</b>                                                                                                                                                                                                                                                                                                                                                            | <b>LVS04004</b>                                                                     |


### Installation



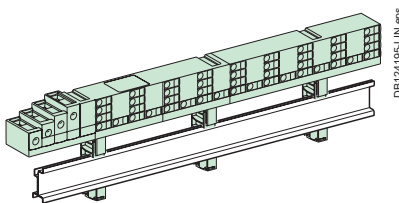Clipped onto the back of a modular rail, or screw fixing.



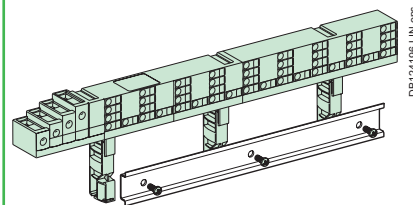Clipped onto the back of a modular rail, or screw fixing.




Can be mounted in Pragma Evolution enclosures and in Prisma Pack 160.

# Linerly FM


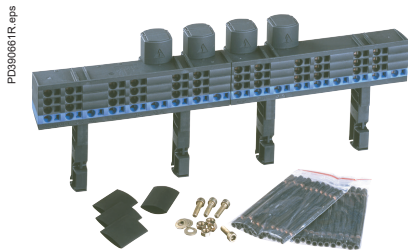
## Quick device feeders

### Device feeders



| 4P                                                                                                                                                                                                                                                                                                                                                                         | 1P+N                                                                              | 3P                                                                                | 4P                                                                                 | 4P                                                                                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                           |  |  |  |  |
| PB502500-18_r_eps                                                                                                                                                                                                                                                                                                                                                          | PB502498-23_r_eps                                                                 | PB502498-27_r_eps                                                                 | PB502497-27_r_eps                                                                  | PB502501-27_r_eps                                                                   |
| 160 A                                                                                                                                                                                                                                                                                                                                                                      | 200 A                                                                             | 200 A                                                                             | 200 A                                                                              | 200 A                                                                               |
| 27 kA                                                                                                                                                                                                                                                                                                                                                                      | 25 kA                                                                             | 25 kA                                                                             | 30 kA                                                                              | 20 kA                                                                               |
| The cascading reinforced breaking capacity when combining circuit breakers is maintained. The worst-case scenarios have been tested. The characteristics are exactly right for the connected devices. Circuit breakers and switches still have their temperature derating curves, and their whole performance is maintained. 150 kA with upstream protection of 150 kA Icc |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
| 750 V AC                                                                                                                                                                                                                                                                                                                                                                   | 750 V AC                                                                          | 750 V AC                                                                          | 750 V AC                                                                           | 750 V AC                                                                            |
| 690 V AC                                                                                                                                                                                                                                                                                                                                                                   | 690 V AC                                                                          | 690 V AC                                                                          | 690 V AC                                                                           | 690 V AC                                                                            |
| 8 kV                                                                                                                                                                                                                                                                                                                                                                       | 8 kV                                                                              | 8 kV                                                                              | 8 kV                                                                               | 8 kV                                                                                |
| 50 A for feeder for 10 mm <sup>2</sup> cable/63 A for feeder for 2 10 mm <sup>2</sup> cables                                                                                                                                                                                                                                                                               |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
| 3600 x 10 <sup>7</sup>                                                                                                                                                                                                                                                                                                                                                     | 3600 x 10 <sup>7</sup>                                                            | 3600 x 10 <sup>7</sup>                                                            |                                                                                    | 3600 x 10 <sup>7</sup>                                                              |
| 50/60 Hz                                                                                                                                                                                                                                                                                                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
| IPxxB                                                                                                                                                                                                                                                                                                                                                                      |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
| 24                                                                                                                                                                                                                                                                                                                                                                         | 48                                                                                |                                                                                   |                                                                                    | 72                                                                                  |
| 12                                                                                                                                                                                                                                                                                                                                                                         | 24                                                                                |                                                                                   |                                                                                    | 36                                                                                  |
| Direct onto the row by cable 50 mm <sup>2</sup> with crimped lug, or flexible bar 20 x 3 from busbar with prefabricated connection                                                                                                                                                                                                                                         |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
| -                                                                                                                                                                                                                                                                                                                                                                          | -                                                                                 |                                                                                   |                                                                                    | -                                                                                   |
| -                                                                                                                                                                                                                                                                                                                                                                          | -                                                                                 |                                                                                   |                                                                                    | -                                                                                   |
| -                                                                                                                                                                                                                                                                                                                                                                          | -                                                                                 |                                                                                   |                                                                                    | -                                                                                   |
| -                                                                                                                                                                                                                                                                                                                                                                          | -                                                                                 |                                                                                   |                                                                                    | -                                                                                   |
| 6                                                                                                                                                                                                                                                                                                                                                                          | 12                                                                                |                                                                                   |                                                                                    | -                                                                                   |
| 6                                                                                                                                                                                                                                                                                                                                                                          | 18                                                                                |                                                                                   |                                                                                    | -                                                                                   |
| 12 x 10 mm <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                    | 24 x 10 mm <sup>2</sup>                                                           | 24 x 10 mm <sup>2</sup>                                                           | 24 x 10 mm <sup>2</sup>                                                            | 36 x 10 mm <sup>2</sup>                                                             |
| 4                                                                                                                                                                                                                                                                                                                                                                          | 2                                                                                 | 3                                                                                 | 4                                                                                  | 4                                                                                   |
| 2                                                                                                                                                                                                                                                                                                                                                                          | 4                                                                                 | 4                                                                                 | 4                                                                                  | 6                                                                                   |
| LVS04018 (1)                                                                                                                                                                                                                                                                                                                                                               | LVS04012 (1)(2)                                                                   | LVS04013 (1)                                                                      | LVS04014 (1)(2)                                                                    | LVS04026 (1)                                                                        |

### Connections to the distribution block

|                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| DD3BES348_eps                                                                       | D43BES55_eps                                                                        |                                                                                      |                                                                                       |
| 4P 200 A connection (supplied with fixings)                                         | 4P 200 A connection (supplied with fixings)                                         | 4P 200 A connection (supplied with fixings)                                          | 4P 160 A connection for Linergy FM 1/2 row                                            |
| Allows power supply from Linergy BW busbars                                         | Linergy BS busbar                                                                   | Rear Linergy BS busbar                                                               | Devices                                                                               |
| Catalog numbers                                                                     | LVS04021                                                                            | LVS04024                                                                             | LVS04029                                                                              |
|                                                                                     |                                                                                     |                                                                                      | LVS04030                                                                              |

### Spare parts

|                                                                                     |                                        |
|-------------------------------------------------------------------------------------|----------------------------------------|
|  | PB502502-8_r_eps                       |
|                                                                                     | 4 covers for 160/200 A Linergy FM rows |
| Catalog numbers                                                                     | LVS01202                               |

**Note:** electrical characteristics > page G-41.

(1) Cable to be used without tip.

(2) Use Linergy FM 200 (LVS04012 and LVS04014) in Direct Current is possible. It is mandatory to locate on the device the nature of the terminals ⊕ and ⊖ at upstream and downstream. For more information, please contact our customer service.

## Linerdy DS

## Screw distribution blocks

## Distribution blocks



## IEC/EN 60947-7-1, IEC/EN 61439-1 &amp; 2

## Description

- Single-pole or four-pole distribution block that can be installed on a standard DIN rail or on a mounting plate.
- Compatible with PrismaSeT G Active and PrismaSeT P Active, Pragma, Mini Pragma and Resbo series switchboards.
- Incomers and feeders are connected to screw terminals that accept rigid or flexible cables with ferrule.
- Optional: additional neutral terminal strip for four-pole distribution block.

## Advantages

- Simplified power supply for main incomers.
- Easy phase balancing.
- Easy, effortless cabling due to excellent accessibility.
- Visible cabling.
- Insulation between phases.
- The single-pole distribution blocks are adjacent and bridgeable via the second incoming hole for parallel connection.

## Screw distribution blocks

| Number of poles                                                          |                        | 1P                                                                                                   |                                                                                                      |                                                                                                      | 4P                                                                                                     |
|--------------------------------------------------------------------------|------------------------|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
|                                                                          |                        |  PB111250-30_1 eps |  PB111251-30_1 eps |  PB111252-30_1 eps |  PB111243-30_1 eps |
| Rating                                                                   |                        | 125 A                                                                                                | 160 A                                                                                                | 250 A                                                                                                | 100 A                                                                                                  |
| Total connection capacity                                                |                        | 10                                                                                                   | 13                                                                                                   | 14                                                                                                   | 4 x 7                                                                                                  |
| <b>Terminal capacity</b>                                                 |                        |                                                                                                      |                                                                                                      |                                                                                                      |                                                                                                        |
| Diameter                                                                 |                        | 2 x Ø9.5 mm                                                                                          | 2 x Ø12 mm                                                                                           | 1 x Ø15.3 mm                                                                                         | 2 x Ø7.5 mm                                                                                            |
|                                                                          |                        | 2 x Ø7.5 mm                                                                                          | 3 x Ø7.5 mm                                                                                          | 1 x Ø10 mm                                                                                           | 5 x Ø5.5 mm                                                                                            |
|                                                                          |                        | 6 x Ø5.8 mm                                                                                          | 8 x Ø5.8 mm                                                                                          | 4 x Ø6 mm                                                                                            | -                                                                                                      |
|                                                                          |                        | -                                                                                                    | -                                                                                                    | 8 x Ø7.5 mm                                                                                          | -                                                                                                      |
| Rated peak withstand current (I <sub>pk</sub> )                          | I <sub>pk</sub> /60 ms | 25 kA                                                                                                | 36 kA                                                                                                | 60 kA                                                                                                | 14 kA                                                                                                  |
|                                                                          | I <sub>pk</sub> /6 ms  | -                                                                                                    | -                                                                                                    | -                                                                                                    | 24 kA                                                                                                  |
| Rated short-time withstand current (I <sub>cc</sub> ) (IEC/EN 60947-7-1) |                        | 36 kA                                                                                                | 36 kA                                                                                                | 36 kA                                                                                                | 20 kA                                                                                                  |
| Width (number of 9 mm pitches)                                           |                        | 3                                                                                                    | 4                                                                                                    | 5                                                                                                    | 8                                                                                                      |
| Dimensions (H x W x D)                                                   |                        | 85 x 27 x 50.5                                                                                       | 85 x 36 x 50.5                                                                                       | 85 x 45 x 50.5                                                                                       | 100 x 71 x 50.5                                                                                        |
| Weight (g)                                                               |                        | 125                                                                                                  | 163                                                                                                  | 239                                                                                                  | 210                                                                                                    |
| Neutral terminal strip (optional)                                        |                        | -                                                                                                    | -                                                                                                    | -                                                                                                    | <b>LGYN1007</b>                                                                                        |
| Catalog numbers                                                          |                        | <b>LGYN12510</b>                                                                                     | <b>LGYN16013</b>                                                                                     | <b>LGYN25014</b>                                                                                     | <b>LGYN410028</b>                                                                                      |

## LinerGY DS

## Screw distribution blocks

## Distribution blocks

## Technical data


## Common characteristics

## In compliance with IEC/EN 60947-7-1 and IEC/EN 61439-1 &amp; 2

|                                                        |                                                                                                            |
|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| Rated insulation voltage (Ui)                          | 500 V AC                                                                                                   |
| Rated operational voltage (Ue)                         | 230 V AC (L/N)<br>440 V AC (L/L)                                                                           |
| Rated impulse withstand voltage (Uimp)                 | 8 kV                                                                                                       |
| Rated conditional short-circuit current of an assembly | Up to the breaking capacity of Schneider Electric feeder circuit breakers, even in cascading configuration |
| Network frequency                                      | 50/60 Hz                                                                                                   |
| Degree of pollution                                    | 3                                                                                                          |
| Overvoltage category                                   | III                                                                                                        |

## Additional technical characteristics

|                                       |                 |
|---------------------------------------|-----------------|
| Reference temperature                 | 40 °C           |
| Operating temperature                 | -25 °C to 55 °C |
| Dielectric withstand (IEC/EN 60947-1) | 2500 V AC       |



On LGY412560 and LGY416048 references.  
Input cabling facilitated by side terminals.

|                  |                  |                  | Neutral terminal strip |               |               |
|------------------|------------------|------------------|------------------------|---------------|---------------|
|                  |                  |                  |                        |               |               |
| 125 A            |                  | 160 A            | 100 A                  | 125 A         |               |
| 4 x 12           | 4 x 15           | 4 x 12           | 7                      | 12            | 15            |
| 1 x Ø9 mm        | 1 x Ø9.5 mm      | 1 x Ø12 mm       | 2 x Ø7.5 mm            | 1 x Ø9 mm     | 1 x Ø9.5 mm   |
| 7 x Ø7.5 mm      | 3 x Ø8.5 mm      | 3 x Ø9 mm        | 5 x Ø5.5 mm            | 7 x Ø7.5 mm   | 3 x Ø8.5 mm   |
| 4 x Ø6.5 mm      | 11 x Ø6.5 mm     | 8 x Ø7.5 mm      | -                      | 4 x Ø6.5 mm   | 11 x Ø6.5 mm  |
| -                | -                | -                | -                      | -             | -             |
| 18 kA            | 18 kA            | 22 kA            | -                      | -             | -             |
| 26 kA            | 28 kA            | 36 kA            | -                      | -             | -             |
| 36 kA            | 36 kA            | 36 kA            | -                      | -             | -             |
| 14               | 20               | 18               | 7                      | 14            | 17            |
| 100 x 126 x 50.5 | 100 x 162 x 50.5 | 100 x 174 x 50.5 | 20 x 70 x 35           | 20 x 125 x 35 | 20 x 155 x 35 |
| 390              | 559              | 567              | 63                     | 111           | 149           |
| LGYN12512        | LGYN12515        | LGYN12512        | -                      | -             | -             |
| LGY412548        | LGY412560        | LGY416048        | LGYN1007               | LGYN12512     | LGYN12515     |

G


## Terminal technical data

| Type                                   | PZ2 screw     |               |                        |               |               |             |              |              |
|----------------------------------------|---------------|---------------|------------------------|---------------|---------------|-------------|--------------|--------------|
| Diameter                               | Ø5.5 mm       | Ø5.8 mm       | Ø6 mm                  | Ø6.5 mm       | Ø7.5 mm       | Ø8.5 mm     | Ø9 mm        | Ø9.5 mm      |
| Section rigid cable                    | 1.5 to 16 mm² | 1.5 to 16 mm² | 1.5 to 16 mm²          | 1.5 to 16 mm² | 2.5 to 25 mm² | 6 to 35 mm² | 10 to 35 mm² | 10 to 35 mm² |
| Section flexible cable or with ferrule | 1.5 to 10 mm² | 1.5 to 10 mm² | 1.5 to 10 mm²          | 1.5 to 10 mm² | 1.5 to 16 mm² | 4 to 25 mm² | 4 to 25 mm²  | 6 to 35 mm²  |
| Tightening torque                      | 2 N.m         | 2 N.m         | 2 N.m                  | 2 N.m         | 2 N.m         | 2 N.m       | 2.5 N.m      | 2.5 N.m      |
| Type                                   | HC screw      |               |                        |               |               |             |              |              |
| Diameter                               | Ø9.5 mm       | Ø10 mm        | Ø12 mm                 | Ø15.3 mm      |               |             |              |              |
| Section rigid cable                    | 10 to 35 mm²  | 1.5 to 50 mm² | 25 to 70 mm²           | 35 to 120 mm² |               |             |              |              |
|                                        |               |               |                        |               |               |             |              |              |
| Section flexible cable or with ferrule | 6 to 35 mm²   | 1.5 to 35 mm² | 16 to 50 mm²           | 25 to 95 mm²  |               |             |              |              |
| Tightening torque                      | 8 N.m         | 4 N.m         | 1P: 9 N.m<br>4P: 5 N.m | 14 N.m        |               |             |              |              |

## Linerger FH

Comb busbar for 27 mm pitch for C120, NG125

## Device feeders



## IEC 60664-1


## Description

Comb busbars make it easier to install C120 and NG125 circuit breaker.

- Supplied with 2 lateral end-caps, to reinforce copper bars insulating (IP2).
- Allowing circuit identification.
- Easy cut to length thanks to cutting marks on the insulating material and copper bars.

| C120, NG125                                            |       | 27 mm poles, cuttable                                                                                                                                                                                                                                                                                |       |       |       |
|--------------------------------------------------------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|-------|
| Number of poles                                        |       | 1P                                                                                                                                                                                                                                                                                                   | 2P    | 3P    | 4P    |
|                                                        |       | <div><div>0309200-60 eps</div></div>                                                                                                                                                                                |       |       |       |
|                                                        |       | Each com busbar reference includes: <ul style="list-style-type: none"><li>■ 1 x single or 2 pole comb busbar + 8 tooth-caps + 2 side plates</li><li>■ 1 x 3 or 4 pole comb busbar + 4 tooth-caps + 2 side plates</li></ul> To insulate teeth that have been left free can be insulated by tooth-caps |       |       |       |
| Rated operational current to 40 °C                     | (Ie)  | 125 A (63 A max by outgoer)                                                                                                                                                                                                                                                                          |       |       |       |
| Rated conditional short-circuit current of an assembly | (Isc) | Compatible with the breaking capacity of C120 and NG125 circuit breakers                                                                                                                                                                                                                             |       |       |       |
| Rated insulation voltage                               | (Ui)  | 620 V AC                                                                                                                                                                                                                                                                                             |       |       |       |
| Rated voltage                                          | (Ue)  | 500 V AC                                                                                                                                                                                                                                                                                             |       |       |       |
| Degree of pollution                                    |       | 3                                                                                                                                                                                                                                                                                                    |       |       |       |
| Fire resistance to IEC 695-2-1                         |       | Self-extinguishing 960 °C, 30 s                                                                                                                                                                                                                                                                      |       |       |       |
| Colour                                                 |       | RAL 7016 (anthracite grey)                                                                                                                                                                                                                                                                           |       |       |       |
| Use                                                    |       |                                                                                                                                                                                                                                                                                                      |       |       |       |
|                                                        |       | Power supply by connector recommended                                                                                                                                                                                                                                                                |       |       |       |
| Number of 27 mm modules                                |       | 16                                                                                                                                                                                                                                                                                                   | 16    | 15    | 16    |
| Set of                                                 |       | 1                                                                                                                                                                                                                                                                                                    |       |       |       |
| Catalog numbers                                        |       | 14811                                                                                                                                                                                                                                                                                                | 14812 | 14813 | 14814 |

## Installation





Comb busbars allow dismantability of switchgear.

## Accessories

| Number of poles | 1P, 2P, 3P, 4P    |                                                                                                                                                                                                          |
|-----------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 |                   |                                                                                                                                                                                                          |
|                 | <b>Tooth caps</b> | <b>Insulated connector</b>                                                                                                                                                                               |
|                 |                   | Compatible with all Schneider Electric comb busbars<br>Clip onto the comb busbar's insulating material, which gives them very great stability<br>Receive clip-on markers allowing circuit identification |
| <b>Use</b>      |                   |                                                                                                                                                                                                          |
|                 |                   | For 25 mm <sup>2</sup> semi-rigid cable                                                                                                                                                                  |
| Set of          | 20                | 4                                                                                                                                                                                                        |
| Catalog numbers | 14818             | 14885                                                                                                                                                                                                    |


## Installation



## Linerger FH

Comb busbar for 18 mm pitch for Acti 9
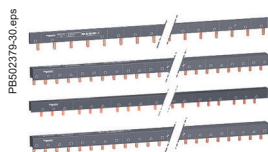
## Device feeders




## IEC 60947-7-1, IEC 61439-2

## Description

Comb busbars make it easier to install Acti 9 circuit breakers.

- Can be sawn and cut in a single pass, with a metal saw (the end-caps are compulsory after cutting).
- Supplied with two lateral end-caps to reinforce copper bars insulating (IP2) except for 57 module references. The side plates are compulsory after cutting.
- Easy cut to length thanks to cutting marks on the insulating material and copper bars.
- The phases are identified by symbols on each side of the comb busbar for installation in all positions.
- The special comb busbars for circuit breakers with 9 mm auxiliaries have a 9 mm gap for inserting iOF and iSD.

| Acti 9                                                 |       | 18 mm poles, cuttable                                                             |          |           |            |                     |          |            |           |                      |                                     |                                     |
|--------------------------------------------------------|-------|-----------------------------------------------------------------------------------|----------|-----------|------------|---------------------|----------|------------|-----------|----------------------|-------------------------------------|-------------------------------------|
| Number of poles                                        |       | 1P                                                                                | 2P       | 3P        | 4P         | 3 (N+P)             | Aux+1P   | Aux+2P     | Aux+3P    | Aux+4P               | 3 (Aux+1P)                          | 3 (Aux+N+1P)                        |
|                                                        |       |  |          |           |            |                     |          |            |           |                      |                                     |                                     |
| Rated operational current at 40 °C                     | (Ie)  | 100 A                                                                             |          |           |            |                     |          |            |           |                      |                                     |                                     |
| Rated conditional short-circuit current of an assembly | (Isc) | Compatible with the breaking capacity of Acti 9 circuit breakers                  |          |           |            |                     |          |            |           |                      |                                     |                                     |
| Rated insulation voltage                               | (Ui)  | 500 V AC                                                                          |          |           |            |                     |          |            |           |                      |                                     |                                     |
| Rated voltage                                          | (Ue)  | 415 V AC                                                                          |          |           |            |                     |          |            |           |                      |                                     |                                     |
| Degree of pollution                                    |       | 3                                                                                 |          |           |            |                     |          |            |           |                      |                                     |                                     |
| Fire resistance to IEC 695-2-1                         |       | Self-extinguishing 960 °C, 30 s                                                   |          |           |            |                     |          |            |           |                      |                                     |                                     |
| Colour                                                 |       | RAL 7016 (anthracite grey)                                                        |          |           |            |                     |          |            |           |                      |                                     |                                     |
| Use                                                    |       |                                                                                   |          |           |            |                     |          |            |           |                      |                                     |                                     |
|                                                        |       | Power supply by connector recommended                                             |          |           |            |                     |          |            |           |                      |                                     |                                     |
| Type                                                   |       | L1...                                                                             | L1L2...  | L1L2L3... | NL1L2L3... | NL1NL2...<br>...NL3 | AuxL1... | AuxL1L2... | AuxL1L2L3 | AuxNL1...<br>...L2L3 | AuxL1...<br>...AuxL2...<br>...AuxL3 | AuxL1...<br>...AuxL2...<br>...AuxL3 |
| Set of                                                 |       | 1                                                                                 | 1        | 1         | 1          | 1                   | 1        | 1          | 1         | 1                    | 1                                   | 1                                   |
| Catalog numbers                                        |       |                                                                                   |          |           |            |                     |          |            |           |                      |                                     |                                     |
| 6 modules of 18 mm                                     |       | A9XPH106                                                                          | -        | -         | -          | -                   | -        | -          | -         | -                    | -                                   | -                                   |
| 12 modules of 18 mm                                    |       | A9XPH112                                                                          | A9XPH212 | A9XPH312  | A9XPH412   | A9XPH512 (1)        | -        | -          | -         | -                    | -                                   | -                                   |
| 18 modules of 18 mm                                    |       | -                                                                                 | -        | -         | -          | A9XPH518 (1)        | -        | -          | -         | -                    | -                                   | -                                   |
| 24 modules of 18 mm                                    |       | A9XPH124                                                                          | A9XPH224 | A9XPH324  | A9XPH424   | A9XPH524 (1)        | -        | -          | -         | -                    | -                                   | -                                   |
| 57 modules of 18 mm                                    |       | A9XPH157                                                                          | A9XPH257 | A9XPH357  | A9XPH457   | A9XPH557 (1)        | A9XAH157 | A9XAH257   | A9XAH357  | A9XAH457             | A9XAH657                            | A9XAH557 (1)                        |

(1) This comb busbar is only compatible in top feeding for simple lug devices and bottom feeding on double lug devices.

## Installation



PB110290-20 eps



PB110793-20 eps

## Accessories

| Number of poles | 1P                                         | 2P       | 3P       | 4P       | -                                          | -                                                                                                                | -                |
|-----------------|--------------------------------------------|----------|----------|----------|--------------------------------------------|------------------------------------------------------------------------------------------------------------------|------------------|
|                 |                                            |          |          |          |                                            |                                                                                                                  |                  |
|                 | Side plates                                |          |          |          | Tooth covers                               | Connectors                                                                                                       |                  |
|                 | Lateral end-caps providing IP20 protection |          |          |          | To insulate teeth that have been left free | Monoconnect                                                                                                      | Double terminals |
|                 |                                            |          |          |          |                                            | Comb busbar power supply. Horizontal incomer on each side. For 35 mm <sup>2</sup> cable. Tightening torque 4 N.m |                  |
|                 |                                            |          |          |          |                                            |                                                                                                                  |                  |
| Set of          | 10                                         | 10       | 10       | 10       | 20                                         | 4                                                                                                                | 4                |
| Catalog numbers | A9XPE110                                   | A9XPE210 | A9XPE310 | A9XPE410 | A9XPT920                                   | A9XPCM04                                                                                                         | A9XPCD04         |



## Linerger FH

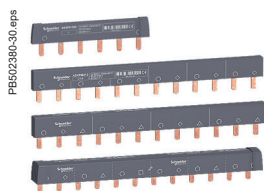
Comb busbar for 18 mm pitch for Acti 9


## Device feeders

## IEC 60947-7-1, IEC 61439-2


## Description

- Comb busbars make it easier to install Acti 9 circuit breakers.
- The phases are identified by symbols on each side of the comb busbar for installation in all positions.



| Acti 9                                                       | 18 mm poles, not cuttable                                                          |          |        |          |              |
|--------------------------------------------------------------|------------------------------------------------------------------------------------|----------|--------|----------|--------------|
| Number of poles                                              | 1P                                                                                 | 2P       | 3P     | 4P       | 3 (N + P)    |
|                                                              |  |          |        |          |              |
| Rated operational current to 40 °C (Ie)                      | 100 A                                                                              |          |        |          |              |
| Rated conditional short-circuit current of an assembly (Isc) | Compatible with the breaking capacity of Acti 9 circuit breakers                   |          |        |          |              |
| Rated insulation voltage (Ui)                                | 500 V AC                                                                           |          |        |          |              |
| Rated voltage (Ue)                                           | 415 V AC                                                                           |          |        |          |              |
| Degree of pollution                                          | 3                                                                                  |          |        |          |              |
| Fire resistance to IEC 695-2-1                               | Self-extinguishing 960 °C, 30 s                                                    |          |        |          |              |
| Colour                                                       | RAL 7016 (anthracite grey)                                                         |          |        |          |              |
| Use                                                          |                                                                                    |          |        |          |              |
| Type                                                         | Power supply by connector recommended                                              |          |        |          |              |
| Set of                                                       | L1                                                                                 | L1L2     | L1L2L3 | NL1L2L3  | NL1NL2NL3    |
| Catalog numbers                                              | -                                                                                  | A9XPM212 | -      | A9XPM412 | A9XPM512 (1) |
| 12 modules of 18 mm                                          |                                                                                    |          |        |          |              |

## Installation



## Accessories

|                     |                                            |                                                                                            |                         |
|---------------------|--------------------------------------------|--------------------------------------------------------------------------------------------|-------------------------|
|                     |                                            |                                                                                            |                         |
|                     | <b>Tooth caps</b>                          | <b>Connectors</b>                                                                          | <b>Double terminals</b> |
|                     | To insulate teeth that have been left free | Monoconnect                                                                                |                         |
|                     |                                            | Comb busbar power supply                                                                   |                         |
| <b>Use</b>          |                                            |                                                                                            |                         |
|                     |                                            | Horizontal incomer on each side<br>For 35 mm <sup>2</sup> cable<br>Tightening torque 4 N.m |                         |
| Set of              | 20                                         | 4                                                                                          | 4                       |
| Catalog numbers     | A9XPT920                                   | A9XPCM04                                                                                   | A9XPCD04                |
| <b>Installation</b> |                                            |                                                                                            |                         |
|                     |                                            |                                                                                            |                         |

(1) This comb busbar is only compatible in top feeding for simple lug devices and bottom feeding on double lug devices.

## Linerger FH

Comb busbar for 9 mm pitch for Acti 9, C60

## Device feeders

## IEC 60439-1

## Description


Comb busbars ensure:

- Easy, reliable mounting of 1P+N and 3P+N, TL, CT, ID, V, BP and Cm switchgear: tooth positioning opposite the device terminals is ensured by indexing of copper parts.

C60/ID Group Feeder comb busbars contain two different parts:


- connection of Group Feeder switchgear: C60 (3P + N) or ID (3P + N) circuit breaker in 18 mm modules, powered by cables, through the bottom, directly by the terminals
- connection of Acti 9 switchgear in 9 mm modules.

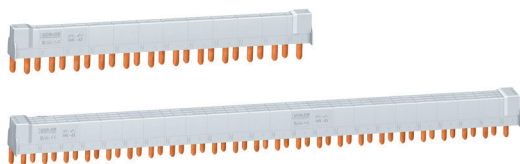PB502302-70 eps




| Acti 9 L + N                                                 |             | 9 mm poles, cuttable                                                                               |       |       |                                                                                                      |       |       |
|--------------------------------------------------------------|-------------|----------------------------------------------------------------------------------------------------|-------|-------|------------------------------------------------------------------------------------------------------|-------|-------|
| Number of poles                                              |             | 1P + N                                                                                             |       |       | 3P + N                                                                                               |       |       |
|                                                              |             | <br>DBI 23729 epe |       |       | <br>DBI 23730 epe |       |       |
|                                                              |             | 21501                                                                                              |       |       | 21505                                                                                                |       |       |
|                                                              |             | Complete comb busbars (supplied with 4 side plates and 1 tooth cap)                                |       |       |                                                                                                      |       |       |
| Rated operational current to 40 °C (Ie)                      |             | 80 A                                                                                               |       |       |                                                                                                      |       |       |
| Rated conditional short-circuit current of an assembly (Isc) |             | Compatible with the breaking capacity of Acti 9 C60 and circuit breakers                           |       |       |                                                                                                      |       |       |
| Rated insulation voltage (Ui)                                |             | 440 V AC                                                                                           |       |       |                                                                                                      |       |       |
| Rated voltage (Ue)                                           |             | 230 V AC (P + N) - 400 V AC (3P + N)                                                               |       |       |                                                                                                      |       |       |
| Rated impulse withstand voltage (Uimp)                       |             | 6 kV                                                                                               |       |       |                                                                                                      |       |       |
| Degree of protection                                         |             | IP20                                                                                               |       |       |                                                                                                      |       |       |
| Degree of pollution                                          |             | 3                                                                                                  |       |       |                                                                                                      |       |       |
| Fire resistance to IEC 695-2-1                               |             | Self-extinguishing 960 °C, 30 s                                                                    |       |       |                                                                                                      |       |       |
| Colour                                                       |             | RAL 7035                                                                                           |       |       |                                                                                                      |       |       |
| Number of 18 mm modules                                      | Comb busbar | 12                                                                                                 | 18    | 24    | 12                                                                                                   | 18    | 24    |
|                                                              | Tooth cap   | 3                                                                                                  | 3     | 6     | 3                                                                                                    | 3     | 6     |
| Catalog numbers                                              |             | 21501                                                                                              | 19512 | 21503 | 21505                                                                                                | 19516 | 21507 |
| Comb busbars alone                                           |             |                                                                                                    |       |       |                                                                                                      |       |       |
| Number of 18 mm modules                                      | Comb busbar | 48                                                                                                 |       |       | 48                                                                                                   |       |       |
|                                                              |             |                                                                                                    |       |       |                                                                                                      |       |       |
| Catalog numbers                                              |             | 21089                                                                                              |       |       | 21093                                                                                                |       |       |

## C60/ID Group Feeder comb busbars alone

| Number of poles                                              |  | 3P + N                                                                               |                   |                    |
|--------------------------------------------------------------|--|--------------------------------------------------------------------------------------|-------------------|--------------------|
|                                                              |  |  |                   |                    |
| Rated operational current to 40 °C (Ie)                      |  | 80 A                                                                                 |                   |                    |
| Rated conditional short-circuit current of an assembly (Isc) |  | Compatible with the breaking capacity of Schneider Electric circuit breakers         |                   |                    |
| Rated insulation voltage (Ui)                                |  | 440 V AC                                                                             |                   |                    |
| Rated voltage (Ue)                                           |  | 230 V AC (P + N) - 400 V AC (3P + N)                                                 |                   |                    |
| Rated impulse withstand voltage (Uimp)                       |  | 6 kV                                                                                 |                   |                    |
| Degree of protection                                         |  | IP20                                                                                 |                   |                    |
| Degree of pollution                                          |  | 3                                                                                    |                   |                    |
| Fire resistance to IEC 695-2-1                               |  | Self-extinguishing 960 °C, 30 s                                                      |                   |                    |
| Colour                                                       |  | RAL 7035                                                                             |                   |                    |
| Number of 18 mm modules                                      |  | 12                                                                                   | 48                | 48                 |
| Power supply                                                 |  | Through left-hand                                                                    | Through left-hand | Through right-hand |
| Catalog numbers                                              |  | 10545                                                                                | 10546             | 10547              |

## Accessories

| Number of poles |  | 1P + N                                                                              | 3P + N                                                                              |                                                                                       |
|-----------------|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                 |  |  |  |  |
|                 |  | Side plates                                                                         | Tooth caps (3 x 18-mm modules)                                                      | Tooth caps (1 x 18-mm modules)                                                        |
| Set of          |  | 40                                                                                  | 12                                                                                  | 10                                                                                    |
| Catalog numbers |  | 21094                                                                               | 21095                                                                               | 21096                                                                                 |
|                 |  |                                                                                     |                                                                                     | 10405                                                                                 |
|                 |  |                                                                                     |                                                                                     | 21098                                                                                 |

## Linerger FH

Comb busbar for 9 mm pitch for Acti 9


## Device feeders


## IEC 60439-1

## Description

- Connection of Clario, Prodis and Librio switchgear in 9 mm modules.
- The special comb busbars for circuit breaker have a gap of 9 mm for inserting OF, SD, OF-SD/OF auxiliaries.
- The comb busbars for 3P + N circuit breakers and auxiliaries are compatible with PrismaSeT switchboard.
- 1P+N comb busbars are compatible with PrismaSeT and Pragma 24.

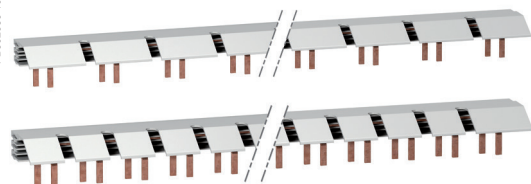PB502383-10.eps



| Acti 9                                                       | 9 mm poles, cuttable                                                                         |          |                       |          |
|--------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------|-----------------------|----------|
| Number of poles                                              | 1P + N                                                                                       | 3P + N   | 1P + N                | 3P + N   |
|                                                              | <div></div> |          |                       |          |
|                                                              | A9N21036                                                                                     |          |                       |          |
|                                                              | Comb busbars                                                                                 |          | DPN Vigi comb busbars |          |
| Rated operational current to 40 °C (Ie)                      | 63 A                                                                                         |          |                       |          |
| Rated conditional short-circuit current of an assembly (Isc) | Compatible with the breaking capacity of Acti 9 circuit breakers                             |          |                       |          |
| Rated insulation voltage (Ui)                                | 500 V AC                                                                                     |          |                       |          |
| Rated voltage (Ue)                                           | 230 V AC (P + N) - 400 V AC (3P + N)                                                         |          |                       |          |
| Degree of protection                                         | IP20                                                                                         |          |                       |          |
| Degree of pollution                                          | 3                                                                                            |          |                       |          |
| Fire resistance to IEC 695-2-1                               | Self-extinguishing 960 °C, 30 s                                                              |          |                       |          |
| Colour                                                       | RAL 7035                                                                                     |          |                       |          |
| Number of 18 mm modules                                      | 56                                                                                           | 56       | 56                    | 56       |
| Catalog numbers                                              | A9N21035                                                                                     | A9N21036 | A9N21037              | A9N21038 |

PB110801-10.eps

## Accessories

| Number of poles | 1P + N                                                                              | 3P + N                                                                              |                                                                                     |                                                                                       |          |
|-----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------|
|                 |  |  |  |  |          |
|                 | Side plates                                                                         | Connectors (grey)                                                                   | Neutral connectors (blue)                                                           | Tooth cap (1 x 18 mm module)                                                          |          |
| Set of          | 20                                                                                  | 10                                                                                  | 10                                                                                  | 10                                                                                    |          |
| Catalog numbers | A9N21039                                                                            | A9N21040                                                                            | A9N21041                                                                            | A9N21042                                                                              | A9N21050 |

## Linerger FH

Horizontal comb busbar for 18 mm pitch for Domae

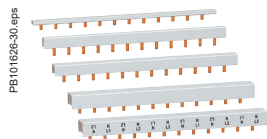
## Device feeders

## IEC 60439-1, IEC 60664

## Description


Comb busbars:

- Comb busbars ensure: Easy, reliable mounting of 1P+N and 3P+N, TL, CT, ID, V, BP and Cm switchgear: tooth positioning opposite the device terminals is ensured by indexing of copper parts
- Can be sawn and cut in a single pass, with a metal saw (the end-caps are compulsory after cutting).
- Are supplied with 2 (IP20) lateral end-caps (mandatory).
- Teeth that have been left free can be insulated by tooth-caps.



| Domae                                                  |          | 18 mm poles, cuttable                                                             |       |       |       |       |       |       |       |            |       |
|--------------------------------------------------------|----------|-----------------------------------------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|------------|-------|
| Number of poles                                        |          | 1P                                                                                |       | 2P    |       | 3P    |       | 4P    |       | 3P (N + P) |       |
|                                                        |          |  |       |       |       |       |       |       |       |            |       |
| Rated operational current to 40 °C                     | (Ie)     | 63 A                                                                              |       |       |       |       |       |       |       |            |       |
| Rated conditional short-circuit current of an assembly | (Isc)    | Compatible with the breaking capacity of circuit breakers                         |       |       |       |       |       |       |       |            |       |
| Rated insulation voltage                               | (Ui)     | 500 V AC                                                                          |       |       |       |       |       |       |       |            |       |
| Rated voltage                                          | (Ue) L/N | 230 V AC                                                                          |       |       |       |       |       |       |       |            |       |
|                                                        | L/L      | 400 V AC                                                                          |       |       |       |       |       |       |       |            |       |
| Degree of pollution                                    |          | 3                                                                                 |       |       |       |       |       |       |       |            |       |
| Fire resistance to IEC 695-2-1                         |          | Auto-extinguible to 850 °C 30 secondes                                            |       |       |       |       |       |       |       |            |       |
| Colour                                                 |          | RAL 7035                                                                          |       |       |       |       |       |       |       |            |       |
| Power supply                                           |          | By 16 mm² semi-rigid cables or 10 mm² flexible cables<br>By connector             |       |       |       |       |       |       |       |            |       |
| Number of 18 mm modules                                |          | 12                                                                                | 57    | 12    | 57    | 12    | 57    | 12    | 57    | 57         | 57    |
| Catalog numbers                                        |          | 10387                                                                             | 10388 | 10389 | 10390 | 10391 | 10392 | 10393 | 10394 | 10395      | 10395 |

## Installation



G


## Accessories
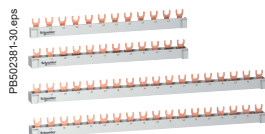
| Type            | Connectors (4 x 35 mm <sup>2</sup> ) | Side plates (2 phases) | Side plates (3 phases) | Side plates (4 phases) | Tooth caps |
|-----------------|--------------------------------------|------------------------|------------------------|------------------------|------------|
| Set of          | 1                                    | 10                     | 10                     | 10                     | 10         |
| Catalog numbers | 10397                                | 10398                  | 10399                  | 10405                  | 10396      |

## Linerger FH

Horizontal biconnect comb busbar for 18 mm pitch




## Device feeders



## IEC 60664-1

## Description

- Distribution and sub-distribution of the electric power supply.
- Fast assembly and disassembly of connected devices.

| Comb horizontal bi-connection                                |  |  |  | 18 mm poles, cuttable                                                                                                               |          |          |                                                                                   |          |          |                                                                                    |          |          |                                                                                     |          |          |
|--------------------------------------------------------------|--|--|--|-------------------------------------------------------------------------------------------------------------------------------------|----------|----------|-----------------------------------------------------------------------------------|----------|----------|------------------------------------------------------------------------------------|----------|----------|-------------------------------------------------------------------------------------|----------|----------|
| Number of poles                                              |  |  |  | 1P                                                                                                                                  |          |          | 2P                                                                                |          |          | 3P                                                                                 |          |          | 4P                                                                                  |          |          |
|                                                              |  |  |  |                                                    |          |          |  |          |          |  |          |          |  |          |          |
|                                                              |  |  |  | PB110876-25 eps                                                                                                                     |          |          | PB110879-25 eps                                                                   |          |          | PB110882-25 eps                                                                    |          |          | PB110885-25 eps                                                                     |          |          |
| Rated operational current to 40 °C (Ie)                      |  |  |  | 63 A                                                                                                                                |          |          |                                                                                   |          |          |                                                                                    |          |          |                                                                                     |          |          |
| Rated conditional short-circuit current of an assembly (Isc) |  |  |  | Compatible with the breaking capacity of circuit breakers                                                                           |          |          |                                                                                   |          |          |                                                                                    |          |          |                                                                                     |          |          |
| Rated insulation voltage (Ui)                                |  |  |  | 500 V AC                                                                                                                            |          |          |                                                                                   |          |          |                                                                                    |          |          |                                                                                     |          |          |
| Rated voltage (Ue) L/N                                       |  |  |  | 230 V AC                                                                                                                            |          |          |                                                                                   |          |          |                                                                                    |          |          |                                                                                     |          |          |
| L/L                                                          |  |  |  | 400 V AC                                                                                                                            |          |          |                                                                                   |          |          |                                                                                    |          |          |                                                                                     |          |          |
| Degree of pollution                                          |  |  |  | 3                                                                                                                                   |          |          |                                                                                   |          |          |                                                                                    |          |          |                                                                                     |          |          |
| Fire resistance to IEC 695-2-1                               |  |  |  | Self-extinguishing 960 °C, 30 s                                                                                                     |          |          |                                                                                   |          |          |                                                                                    |          |          |                                                                                     |          |          |
| Colour                                                       |  |  |  | RAL 7035 (grey)                                                                                                                     |          |          |                                                                                   |          |          |                                                                                    |          |          |                                                                                     |          |          |
| Use                                                          |  |  |  | Power supply: directly on terminal (25 mm² rigid or 16 mm² flexible) or by connector (35 mm² rigid or 25 mm² flexible with ferrule) |          |          |                                                                                   |          |          |                                                                                    |          |          |                                                                                     |          |          |
| Type                                                         |  |  |  | L1                                                                                                                                  |          |          | L1L2                                                                              |          |          | L1L2L3                                                                             |          |          | L1L2L3L4                                                                            |          |          |
| Number of 18 mm modules                                      |  |  |  | 12                                                                                                                                  | 18       | 57       | 12                                                                                | 18       | 57       | 12                                                                                 | 18       | 57       | 12                                                                                  | 18       | 57       |
| Set of                                                       |  |  |  | 1                                                                                                                                   | 1        | 1        | 1                                                                                 | 1        | 1        | 1                                                                                  | 1        | 1        | 1                                                                                   | 1        | 1        |
| Catalog numbers                                              |  |  |  | R9XFH112                                                                                                                            | R9XFH118 | R9XFH157 | R9XFH212                                                                          | R9XFH218 | R9XFH257 | R9XFH312                                                                           | R9XFH318 | R9XFH357 | R9XFH412                                                                            | R9XFH418 | R9XFH457 |

## Installation



| Comb busbars horizontal bi-connection                  |          | 18 mm poles, cuttable                                                                |           |
|--------------------------------------------------------|----------|--------------------------------------------------------------------------------------|-----------|
| Number of poles                                        |          | 4P                                                                                   |           |
|                                                        |          |  |           |
| Rated operational current to 40 °C                     | (Ie)     | 63 A                                                                                 |           |
| Rated conditional short-circuit current of an assembly | (Isc)    | Compatible with the breaking capacity of Schneider Electric circuit breakers         |           |
| Rated insulation voltage                               | (Ui)     | 500 V AC                                                                             |           |
| Rated voltage                                          | (Ue) L/N | 230 V AC                                                                             |           |
|                                                        | L/L      | 400 V AC                                                                             |           |
| Degree of pollution                                    |          | 3                                                                                    |           |
| Fire resistance to IEC 695-2-1                         |          | Self-extinguishing 960 °C, 30 s                                                      |           |
| Colour                                                 |          | RAL 7035 (grey)                                                                      |           |
| Use                                                    |          |                                                                                      |           |
| Type                                                   |          | NL1L2L3L4 - NL1NL2NL3                                                                | NL1NL2NL3 |
| Number of 18 mm modules                                |          | 18                                                                                   | 18        |
| Set of                                                 |          | 1                                                                                    | 57        |
|                                                        |          |                                                                                      | 1         |
| Catalog numbers                                        |          | R9XFH518G                                                                            | R9XFH518  |
|                                                        |          |                                                                                      | R9XFH557  |

## Installation



| Accessories     |                                                                                     |         |         |         |                                                                                      |  |  |                                                                                       |  |  |  |  |
|-----------------|-------------------------------------------------------------------------------------|---------|---------|---------|--------------------------------------------------------------------------------------|--|--|---------------------------------------------------------------------------------------|--|--|--|--|
| Number of poles | 1P                                                                                  | 2P      | 3P      | 4P      |                                                                                      |  |  |                                                                                       |  |  |  |  |
|                 |  |         |         |         |  |  |  |  |  |  |  |  |
|                 | Side plates                                                                         |         |         |         | Tooth caps                                                                           |  |  | Connectors                                                                            |  |  |  |  |
| Set of          | 10                                                                                  |         |         |         | 20                                                                                   |  |  | 4                                                                                     |  |  |  |  |
| Catalog numbers | R9XE110                                                                             | R9XE210 | R9XE310 | R9XE410 | R9XT20                                                                               |  |  | R9XFC04                                                                               |  |  |  |  |


## Linerger TA

## Auxiliary connections

## Terminal blocks and lines


## Connectors

For plug & play interconnection between electrical switchboard for control and communication wires.



## RJ45 female-female connector with mounting plate

|                        |                                  |
|------------------------|----------------------------------|
| Connector type         | 8 wires RJ45; 1 Gbps             |
| For ethernet cable     | CAT5e SFTP (IEC 11801) or higher |
| Degree of protection   | IP67 for direct mount            |
| Dimensions (H x W x D) | (mm) 75 x 70 x 45                |
| Catalog number         | LGY4230                          |



## 8P male-female connector with mounting plate

|                                    |        |                            |
|------------------------------------|--------|----------------------------|
| Rated operational current at 40 °C | (Ie)   | 12 A                       |
| Rated operational voltage          | (Ue)   | 320 V                      |
| Rated impulse withstand voltage    | (Uimp) | 4 kV                       |
| Connection method                  |        | Push-in spring connection  |
| Connection capacity                | Input  | 8                          |
|                                    | Output | 8                          |
| Dimensions (H x W x D)             | (mm)   | 75 x 70 x 45               |
| Wire size                          |        | 0.2 to 2.5 mm <sup>2</sup> |
| Catalog number                     |        | LGY4231                    |



## USB and RJ45 ports

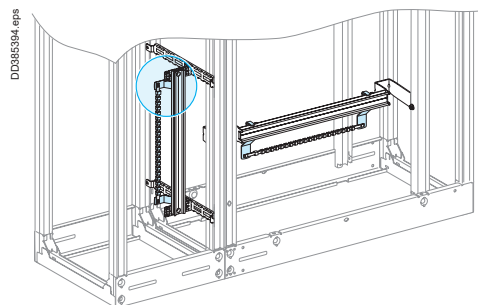
|                        |                                                             |                               |                                      |                                           |                                         |
|------------------------|-------------------------------------------------------------|-------------------------------|--------------------------------------|-------------------------------------------|-----------------------------------------|
| Description            | Panel-mounted USB and RJ45 ports in 22.5 mm hole with notch |                               |                                      |                                           |                                         |
| Interface type         | USB interface, jack type A                                  | Ethernet interface, RJ45 jack | Plastic protection cover IP65/ IP67  | Rigid plastic protection cover IP65/ IP67 | Metal protection cover IP65/ IP67/IP69K |
| Connection type        | USB port 3.0 A-A                                            | RJ45 port Cat. 6              | Ø 22 mm/0.866 in. USB and RJ45 ports |                                           |                                         |
| Others characteristics | IP20<br>IP65, IP67, IP69K with protection cover             |                               | Black quantity:10                    | Transparent quantity:1                    | Silver quantity:1                       |
| Catalog number         | XB5PUSB3                                                    | XB5PRJ45                      | ZBSP1                                | ZBSP2                                     | ZBSP3                                   |



## Linerger TB

## Earth bars

## Terminal blocks and lines



## Description

This range of earth bars is installed:

- in the duct which can constitute a dedicated area, completely separate from the equipment
- or in the switchgear compartment, at the top or the bottom .

## Fast-connecting earth bar

|                         |                                                     |
|-------------------------|-----------------------------------------------------|
|                         |                                                     |
| <b>Copper earth bar</b> |                                                     |
| Cross-section (mm)      | 12 x 3                                              |
| Effective length (mm)   | 330                                                 |
| Total length (mm)       | 450                                                 |
| Composition             | Copper bar with 1 terminal 16 to 35 mm <sup>2</sup> |
| Catalog numbers         | LVS04201                                            |

## Accessories

|                                         |                        |
|-----------------------------------------|------------------------|
|                                         |                        |
| <b>Earth blocks with terminals</b>      |                        |
| Spring-fixing (clip onto the earth bar) |                        |
| Total connection capacity               | 12 x 4 mm <sup>2</sup> |
| Composition                             | 4 earth blocks         |
| Catalog numbers                         | LVS04214               |

## Accessories

|                                     |                                                       |
|-------------------------------------|-------------------------------------------------------|
|                                     |                                                       |
| <b>Copper earth bar with jumper</b> |                                                       |
| Total connection capacity           | 40 x 2.5 to 16 mm <sup>2</sup>                        |
| Cross-section (mm)                  | 12 x 3                                                |
| Length (mm)                         | 450                                                   |
| Composition                         | 40 jumpers and a terminal (16 to 35 mm <sup>2</sup> ) |
| Catalog numbers                     | LVS04200                                              |

## Accessories

|                                        |                      |
|----------------------------------------|----------------------|
|                                        |                      |
| <b>Neutral bar</b>                     |                      |
| Converts an earth bar to a neutral bar |                      |
| Composition                            | 2 insulating spacers |
| Catalog numbers                        | LVS04210             |

|                                          |          |
|------------------------------------------|----------|
| <b>Earth bar</b>                         |          |
| 2 supports for earth bar on modular rail |          |
| Catalog numbers                          | LVS04205 |

# Linergy TB PE conductor

## Terminal blocks and lines

| PE conductor                   |                                                                     |              |          |                                                                                  |          |                                                                                  |          |
|--------------------------------|---------------------------------------------------------------------|--------------|----------|----------------------------------------------------------------------------------|----------|----------------------------------------------------------------------------------|----------|
|                                |                                                                     |              |          |                                                                                  |          |                                                                                  |          |
|                                | <b>Vertical PE conductor with Linergy LGY profile (W = 1670 mm)</b> |              |          | <b>Vertical PE conductor with Linergy BS busbar (W = 1675 mm)</b>                |          | <b>Horizontal PE conductor with Linergy BS busbar</b>                            |          |
| Rated short-time current (Isc) | ≤ 65                                                                | > 65... ≤ 80 | = 100    | ≤ 40                                                                             | > 40     | ≤ 40                                                                             | > 40     |
| Permissible current (A)        | 630                                                                 | 800          | 1250     | 400                                                                              | 600      | 400                                                                              | 600      |
| Bar size (mm)                  |                                                                     |              |          | 25 x 5                                                                           | 50 x 5   | 25 x 5                                                                           | 50 x 5   |
| Characteristics                |                                                                     |              |          | Drilled flat bar Ø10.6 mm (one 10.6 mm hole every 25 mm along the entire length) |          | Drilled flat bar Ø10.6 mm (two 10.6 mm hole every 25 mm along the entire length) |          |
| Catalog numbers                | LVS04502                                                            | LVS04503     | LVS04505 | LVS04512                                                                         | LVS04515 | LVS04512                                                                         | LVS04515 |

| Support selection |                                                                                          |  |                                    |
|-------------------|------------------------------------------------------------------------------------------|--|------------------------------------|
| Composition       | Three supports for one vertical PE (supplied with PE marking) to secure to the framework |  | Two supports for one horizontal PE |
| Catalog numbers   | LVS04657                                                                                 |  | LVS04667                           |

| Connection between PE conductors |                                                          |                                                                                                      |
|----------------------------------|----------------------------------------------------------|------------------------------------------------------------------------------------------------------|
|                                  |                                                          |                                                                                                      |
|                                  | <b>Connection plates for horizontal/vertical PE bars</b> | <b>Linergy connection hardware</b>                                                                   |
| Composition                      | 2 copper angle brackets                                  | 20 M8 bolts (W = 25 mm) + 20 nuts + 20 contact washers for connection to cable lugs or flexible bars |
| Catalog numbers                  | LVS04672                                                 | LVS04766                                                                                             |

| PEN conductor   |                                                                  |                                                                           |
|-----------------|------------------------------------------------------------------|---------------------------------------------------------------------------|
|                 |                                                                  |                                                                           |
|                 | <b>Linergy TB PEN installation kit with LGY vertical profile</b> | <b>1600 A connection 10 mm horizontal busbar with Linergy LGY profile</b> |
| Catalog numbers | LVS04656                                                         | LVS04636                                                                  |
|                 |                                                                  | <b>Linergy LGYE vertical connection 1600 A</b>                            |
| Catalog numbers |                                                                  | LVS04602                                                                  |

Note: for further details > page I-12.

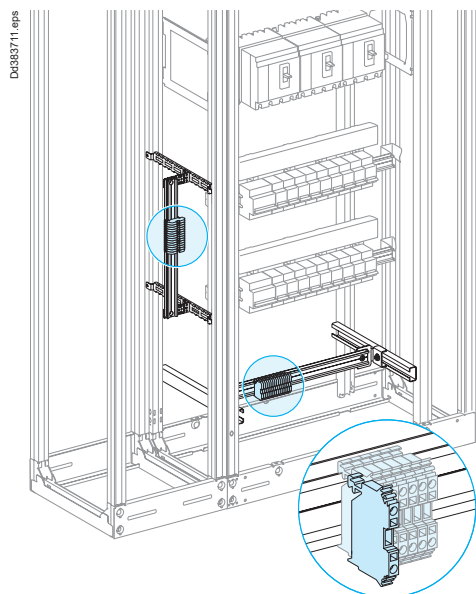
## Linerger TB terminal block support

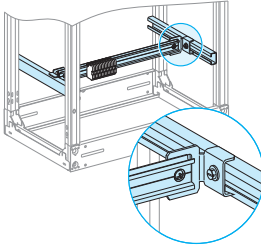
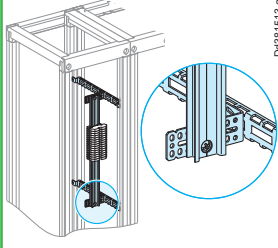
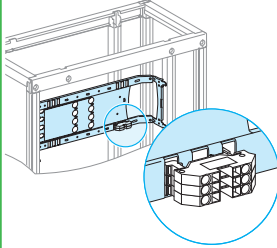
## Secondary distribution

## Introduction

In PrismaSeT P Active cubicles, terminal blocks are commonly installed in a lateral compartment, generally 300 or 400 mm wide.

They may also be installed at the top or bottom of the cubicle.



|                                             | Installation at top or bottom of a cubicle                                                          | Installation in a lateral compartment                                                                                                                                                                                                                         | Installation on a device mounting plate                                                                                                                                                    |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                             |                  |                                                                                                                                                                           |                                                                                                       |
| Modular rail, depth adjustable (W = 432 mm) | <b>LVS03402</b>                                                                                     | -                                                                                                                                                                                                                                                             | -                                                                                                                                                                                          |
| 2 modular rails W = 1600 mm                 | <b>LVS04226</b>                                                                                     | <b>LVS04226</b>                                                                                                                                                                                                                                               | -                                                                                                                                                                                          |
| 2 universal angle brackets                  | <b>LVS03581</b>                                                                                     | <b>LVS03581</b>                                                                                                                                                                                                                                               | -                                                                                                                                                                                          |
| Set of two lateral cross-members W = 400 mm | <b>LVS03584</b>                                                                                     | -                                                                                                                                                                                                                                                             | -                                                                                                                                                                                          |
| Characteristics                             | Terminal blocks are grouped on modular rails that can be depth adjusted behind a plain front plate. | The terminal block is generally installed in the cable compartment, W = 300 or 400 mm. The terminal blocks clip onto a modular rail. The rail is secured to cable-tie supports using universal angle brackets for precise positioning of the terminal blocks. | Terminal blocks can be directly installed on the mounting plates for horizontally mounted ComPacT NSX100/630 and vertically mounted ComPacT NS630b/1600 for connection of auxiliary wires. |

## Width of standard terminal blocks

|                                   |   |   |    |    |
|-----------------------------------|---|---|----|----|
| Max. cable CSA (mm <sup>2</sup> ) | 4 | 6 | 10 | 16 |
| Width of terminal block (mm)      | 6 | 8 | 10 | 12 |

## Height required in switchboard

|                                   |                 |                 |                 |                 |
|-----------------------------------|-----------------|-----------------|-----------------|-----------------|
| Max. cable CSA (mm <sup>2</sup> ) | 4               | 6               | 10              | 16              |
| No. of vertical modules           | 3               | 3               | 5               | 6               |
| Plain front plate                 | <b>LVS03803</b> | <b>LVS03803</b> | <b>LVS03805</b> | <b>LVS03806</b> |

Designing connection  $\leq 630$  A

## Auxiliary connections

## Electrical characteristics

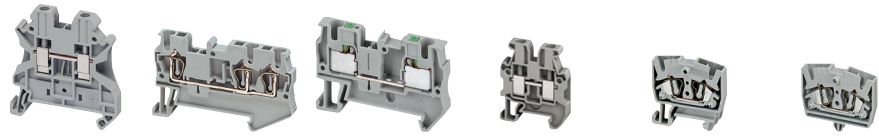
| Device                                               |                                            |         |              |         |              |         |              |         |              |         |              |         |
|------------------------------------------------------|--------------------------------------------|---------|--------------|---------|--------------|---------|--------------|---------|--------------|---------|--------------|---------|
|                                                      | Ambient temperature around the switchboard |         |              |         |              |         |              |         |              |         |              |         |
|                                                      | 25°C                                       |         | 30°C         |         | 35°C         |         | 40°C         |         | 45°C         |         | 50°C         |         |
|                                                      | IP $\leq 31$                               | IP > 31 | IP $\leq 31$ | IP > 31 | IP $\leq 31$ | IP > 31 | IP $\leq 31$ | IP > 31 | IP $\leq 31$ | IP > 31 | IP $\leq 31$ | IP > 31 |
| Rated current of a circuit $I_{nc}$ (A)              |                                            |         |              |         |              |         |              |         |              |         |              |         |
| <b>Linerger BW</b>                                   |                                            |         |              |         |              |         |              |         |              |         |              |         |
| Insulated bus bar Linergy BW 125A                    | 134                                        | 125     | 129          | 120     | 125          | 116     | 120          | 111     | 116          | 106     | 110          | ■       |
| Insulated bus bar Linergy BW 160A                    | 171                                        | 160     | 166          | 154     | 160          | 148     | 154          | 142     | 148          | 135     | 142          | ■       |
| Insulated bus bar Linergy BW 250                     | 267                                        | 250     | 259          | 241     | 250          | 231     | 241          | 222     | 231          | 211     | 222          | ■       |
| Insulated bus bar Linergy BW 400A                    | 428                                        | 400     | 414          | 385     | 400          | 370     | 385          | 355     | 370          | 338     | 355          | ■       |
| Insulated bus bar Linergy BW 630A                    | 673                                        | 630     | 652          | 607     | 630          | 583     | 607          | 558     | 583          | 532     | 558          | ■       |
| <b>Linerger BS</b>                                   |                                            |         |              |         |              |         |              |         |              |         |              |         |
| Rear flat busbars 160 A                              | 171                                        | 160     | 166          | 154     | 160          | 148     | 154          | 142     | 148          | 135     | 142          | ■       |
| Rear flat busbars 250 A                              | 267                                        | 250     | 259          | 241     | 250          | 231     | 241          | 222     | 231          | 211     | 222          | ■       |
| Rear flat busbars 400 A                              | 428                                        | 400     | 414          | 385     | 400          | 370     | 385          | 355     | 370          | 338     | 355          | ■       |
| Rear flat busbars 630 A                              | 673                                        | 630     | 652          | 607     | 630          | 583     | 607          | 558     | 583          | 532     | 558          | ■       |
| <b>Linerger BS</b>                                   |                                            |         |              |         |              |         |              |         |              |         |              |         |
| Multi-stage busbars 160 A                            | 171                                        | 160     | 166          | 154     | 160          | 148     | 154          | 142     | 148          | 135     | 142          | ■       |
| Multi-stage busbars 250 A                            | 267                                        | 250     | 259          | 241     | 250          | 231     | 241          | 222     | 231          | 211     | 222          | ■       |
| Multi-stage busbars block 400A                       | 428                                        | 400     | 414          | 385     | 400          | 370     | 385          | 355     | 370          | 338     | 355          | ■       |
| Multi-stage busbars block 630 A                      | 673                                        | 630     | 652          | 607     | 630          | 583     | 607          | 558     | 583          | 532     | 558          | ■       |
| <b>Linerger BS</b>                                   |                                            |         |              |         |              |         |              |         |              |         |              |         |
| Multi-stage distribution block 160 A                 | 171                                        | 160     | 166          | 154     | 160          | 148     | 154          | 142     | 148          | 135     | 142          | ■       |
| Multi-stage distribution block 250 A                 | 267                                        | 250     | 259          | 241     | 250          | 231     | 241          | 222     | 231          | 211     | 222          | ■       |
| Multi-stage distribution block 400A                  | 428                                        | 400     | 414          | 385     | 400          | 370     | 385          | 355     | 370          | 338     | 355          | ■       |
| Multi-stage distribution block 630 A                 | 673                                        | 630     | 652          | 607     | 630          | 583     | 607          | 558     | 583          | 532     | 558          | ■       |
| <b>Linerger DX</b>                                   |                                            |         |              |         |              |         |              |         |              |         |              |         |
| Quick distribution block Linergy DX 4P 125A          | 134                                        | 125     | 129          | 120     | 125          | 116     | 120          | 111     | 116          | 106     | 111          | ■       |
| Quick distribution block Linergy DX 4P 160A          | 171                                        | 160     | 166          | 154     | 160          | 148     | 154          | 142     | 148          | 135     | 142          | ■       |
| Quick distribution block Linergy DX 1P 1P 160A       | 171                                        | 160     | 166          | 154     | 160          | 148     | 154          | 142     | 148          | 155     | 142          | ■       |
| <b>Linerger DP</b>                                   |                                            |         |              |         |              |         |              |         |              |         |              |         |
| Quick distribution block Linergy DP 3P-4P 160A       | 160                                        | 160     | 155          | 155     | 150          | 150     | 145          | 145     | 140          | 140     | 135          | ■       |
| Quick distribution block Linergy DP 3P-4P 250A       | 267                                        | 250     | 259          | 241     | 250          | 231     | 241          | 222     | 231          | 211     | 222          | ■       |
| <b>Linerger FM</b>                                   |                                            |         |              |         |              |         |              |         |              |         |              |         |
| Quick device feeders Linergy FM 4P 63A               | 67                                         | 63      | 65           | 61      | 63           | 58      | 61           | 56      | 58           | 53      | 56           | ■       |
| Quick device feeders Linergy FM 4P 80A               | 86                                         | 80      | 83           | 77      | 80           | 74      | 77           | 71      | 74           | 68      | 71           | ■       |
| Quick device feeders Linergy FM 4P 160A              | 171                                        | 160     | 166          | 154     | 160          | 148     | 154          | 142     | 148          | 135     | 142          | ■       |
| Quick device feeders Linergy FM 2P 200A              | 214                                        | 200     | 207          | 193     | 200          | 185     | 193          | 177     | 185          | 169     | 177          | ■       |
| Quick device feeders Linergy FM 3P 200A              | 214                                        | 200     | 207          | 193     | 200          | 185     | 193          | 177     | 185          | 169     | 177          | ■       |
| Quick device feeders Linergy FM 4P 200A              | 214                                        | 200     | 207          | 193     | 200          | 185     | 193          | 177     | 185          | 169     | 177          | ■       |
| Quick device feeders Linergy FM 4P 200A (36 modules) | 214                                        | 200     | 207          | 193     | 200          | 185     | 193          | 177     | 185          | 169     | 177          | ■       |



■ Check the concordance between Linergy derating value and upstream protection device derating value.

# Linergy TR

## Terminal blocks

## Secondary distribution



|                        |                                       |               | Connection technology                                                                           |                                                                                                  |                                                                                                   |                                                                                                                           |                                                                                                                            |                                                                                                                          |
|------------------------|---------------------------------------|---------------|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Type of terminal block | Cross section area                    | Color         | Screw tech<br> | Spring tech<br> | Push-in tech<br> | Miniature screw for 15 mm DIN rail<br> | Miniature spring for 15 mm DIN rail<br> | Miniature spring for direct mount<br> |
| Passthrough            | 2.5 mm <sup>2</sup> (2 pts)           | Grey          | NSYTRV22                                                                                        | NSYTRR22                                                                                         | NSYTRP22                                                                                          | NSYTRV22M                                                                                                                 | NSYTRR22M                                                                                                                  | NSYTRR22MF                                                                                                               |
|                        |                                       | Blue          | NSYTRV22BL                                                                                      | NSYTRR22BL                                                                                       | NSYTRP22BL                                                                                        | NSYTRV22MBL                                                                                                               | NSYTRR22MBL                                                                                                                | NSYTRR22MFB                                                                                                              |
|                        |                                       | Orange        | NSYTRV22AR                                                                                      | NSYTRR22AR                                                                                       | NSYTRP22AR                                                                                        | -                                                                                                                         | -                                                                                                                          | NSYTRR22MFF*                                                                                                             |
|                        | 2.5 mm <sup>2</sup> (3 pts)           | Grey          | NSYTRV23                                                                                        | NSYTRR23                                                                                         | NSYTRP23                                                                                          | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        |                                       | Blue          | NSYTRV23BL                                                                                      | NSYTRR23BL                                                                                       | NSYTRP23BL                                                                                        | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        |                                       | Orange        | -                                                                                               | NSYTRR23AR                                                                                       | NSYTRP23AR                                                                                        | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 2.5 mm <sup>2</sup> (4 pts)           | Grey          | NSYTRV24                                                                                        | NSYTRR24                                                                                         | NSYTRP24                                                                                          | -                                                                                                                         | NSYTRR24M                                                                                                                  | NSYTRR24M                                                                                                                |
|                        |                                       | Blue          | NSYTRV24BL                                                                                      | NSYTRR24BL                                                                                       | NSYTRP24BL                                                                                        | -                                                                                                                         | NSYTRR24MBL                                                                                                                | NSYTRR24MBL                                                                                                              |
|                        | 2.5 mm <sup>2</sup> (4 pts, 2 levels) | Grey          | NSYTRV24D                                                                                       | NSYTRR24D                                                                                        | NSYTRP24D                                                                                         | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        |                                       | Blue          | NSYTRV24DBL                                                                                     | NSYTRR24DBL                                                                                      | NSYTRP24DBL                                                                                       | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 2.5 mm <sup>2</sup> (6 pts, 3 levels) | Grey          | NSYTRV26T                                                                                       | NSYTRR26T                                                                                        | NSYTRP26T                                                                                         | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        |                                       | Blue          | NSYTRV26TBL                                                                                     | NSYTRR26TBL                                                                                      | NSYTRP26TBL                                                                                       | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 4 mm <sup>2</sup> (2 pts)             | Grey          | NSYTRV42                                                                                        | NSYTRR42                                                                                         | NSYTRP42                                                                                          | NSYTRV42M                                                                                                                 | -                                                                                                                          | -                                                                                                                        |
|                        |                                       | Blue          | NSYTRV42BL                                                                                      | NSYTRR42BL                                                                                       | NSYTRP42BL                                                                                        | NSYTRV42MBL                                                                                                               | -                                                                                                                          | -                                                                                                                        |
|                        |                                       | Orange        | NSYTRV42AR                                                                                      | NSYTRR42AR                                                                                       | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 4 mm <sup>2</sup> (3 pts)             | Grey          | NSYTRV43                                                                                        | NSYTRR43                                                                                         | NSYTRP43                                                                                          | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        |                                       | Blue          | NSYTRV43BL                                                                                      | NSYTRR43BL                                                                                       | NSYTRP43BL                                                                                        | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 4 mm <sup>2</sup> (4 pts)             | Grey          | NSYTRV44                                                                                        | NSYTRR44                                                                                         | NSYTRP44                                                                                          | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        |                                       | Blue          | NSYTRV44BL                                                                                      | NSYTRR44BL                                                                                       | NSYTRP44BL                                                                                        | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 4 mm <sup>2</sup> (4 pts, 2 levels)   | Grey          | NSYTRV44D                                                                                       | NSYTRR44D                                                                                        | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        |                                       | Blue          | NSYTRV44DBL                                                                                     | NSYTRR44DBL                                                                                      | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 6 mm <sup>2</sup> (2 pts)             | Grey          | NSYTRV62                                                                                        | NSYTRR62                                                                                         | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        |                                       | Blue          | NSYTRV62BL                                                                                      | NSYTRR62BL                                                                                       | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 10 mm <sup>2</sup> (2 pts)            | Grey          | NSYTRV102                                                                                       | NSYTRR102                                                                                        | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        |                                       | Blue          | NSYTRV102BL                                                                                     | NSYTRR102BL                                                                                      | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 16 mm <sup>2</sup> (2 pts)            | Grey          | NSYTRV162                                                                                       | NSYTRR162                                                                                        | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        |                                       | Blue          | NSYTRV162BL                                                                                     | NSYTRR162BL                                                                                      | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
| Earth protection       | 2.5 mm <sup>2</sup> (2 pts)           | Green/Yellow  | NSYTRV22PE                                                                                      | NSYTRR22PE                                                                                       | NSYTRP22PE                                                                                        | NSYTRV22MPE                                                                                                               | NSYTRR22MPE                                                                                                                | -                                                                                                                        |
|                        | 2.5 mm <sup>2</sup> (3 pts)           | Green/Yellow  | NSYTRV23PE                                                                                      | NSYTRR23PE                                                                                       | NSYTRP23PE                                                                                        | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 2.5 mm <sup>2</sup> (4 pts)           | Green/Yellow  | NSYTRV24PE                                                                                      | NSYTRR24PE                                                                                       | NSYTRP24PE                                                                                        | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 4 mm <sup>2</sup> (2 pts)             | Green/Yellow  | NSYTRV42PE                                                                                      | NSYTRR42PE                                                                                       | NSYTRP42PE                                                                                        | NSYTRV42MPE                                                                                                               | -                                                                                                                          | -                                                                                                                        |
|                        | 4 mm <sup>2</sup> (3 pts)             | Green/Yellow  | NSYTRV43PE                                                                                      | NSYTRR43PE                                                                                       | NSYTRP43PE                                                                                        | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 4 mm <sup>2</sup> (4 pts)             | Green/Yellow  | NSYTRV44PE                                                                                      | NSYTRR44PE                                                                                       | NSYTRP44PE                                                                                        | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 6 mm <sup>2</sup> (2 pts)             | Green/Yellow  | NSYTRV62PE                                                                                      | NSYTRR62PE                                                                                       | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 10 mm <sup>2</sup> (2 pts)            | Green/Yellow  | NSYTRV102PE                                                                                     | NSYTRR102PE                                                                                      | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
| Knife Disconnect       | 2.5 mm <sup>2</sup> (2 pts)           | Grey          | NSYTRV22SC                                                                                      | NSYTRR22SC                                                                                       | NSYTRP22SC                                                                                        | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        |                                       | Orange        | NSYTRV22ST (1)                                                                                  | NSYTRR22SCAR                                                                                     | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 2.5 mm <sup>2</sup> (3 pts)           | Grey          | -                                                                                               | NSYTRR23SC                                                                                       | NSYTRP23SC                                                                                        | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        |                                       | Orange        | -                                                                                               | NSYTRR23SCAR                                                                                     | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 2.5 mm <sup>2</sup> (2 levels)        | Grey          | NSYTRV24SCD                                                                                     | NSYTRR24SCD                                                                                      | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
| Fuse Disconnect        | 4 mm <sup>2</sup> (2 pts)             | Black         | NSYTRV42SF5                                                                                     | -                                                                                                | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 5 x 20 mm fuse                        | Black (12 V)  | NSYTRV42SF5LD (2)                                                                               | -                                                                                                | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        |                                       | Black (230 V) | NSYTRV42SF5LA (2)                                                                               | -                                                                                                | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
| Basic Disconnect (3)   | 4 mm <sup>2</sup> (2 pts)             | Grey          | NSYTRV42TB                                                                                      | NSYTRR42TB                                                                                       | NSYTRP42TB                                                                                        | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
| Measuring transducer   | 6 mm <sup>2</sup> (2 pts) Disconnect  | Grey          | NSYTRV62TTD                                                                                     | -                                                                                                | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 6 mm <sup>2</sup> (2 pts)             | Grey          | NSYTRV62TT                                                                                      | -                                                                                                | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |
|                        | 6 mm <sup>2</sup> (2 pts)             | Green/Yellow  | NSYTRV62TTPE                                                                                    | -                                                                                                | -                                                                                                 | -                                                                                                                         | -                                                                                                                          | -                                                                                                                        |

\* Grey terminal with flange.

(1) Grey disconnect terminal with 2 test points.


(2) With light indicator.

(3) Fuse or component carrier not supplied.

# Linergy TR
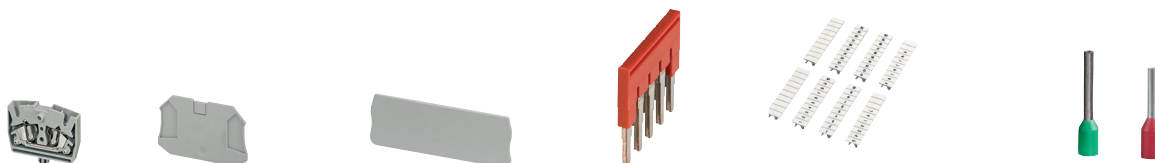
## Terminal blocks

### Secondary distribution



| Accessories  |                                   |                         |                          |                           |                |                              |
|--------------|-----------------------------------|-------------------------|--------------------------|---------------------------|----------------|------------------------------|
|              | Miniature spring for direct mount | End plate for screw TBs | End plate for spring TBs | End plate for push-in TBs | Plug-in bridge | Marking strips 10 characters |
|              | NSYTRR22MP                        | NSYTRAC22               | NSYTRACR22               | NSYTRACR22                | NSYTRAL22      | NSYTRABF510                  |
|              | NSYTRR22MPBL                      | NSYTRAC22BL             | NSYTRACR22BL             | NSYTRACR22BL              | NSYTRAL23      | NSYTRABF520                  |
| -            | -                                 | -                       | -                        | -                         | NSYTRAL24      | NSYTRABF530                  |
| -            | -                                 | NSYTRAC23               | NSYTRACR23               | NSYTRACR23                | NSYTRAL25      | NSYTRABF540                  |
| -            | -                                 | -                       | NSYTRACR23BL             | NSYTRACR23BL              | NSYTRAL210     | NSYTRABF550                  |
| -            | -                                 | -                       | -                        | -                         | NSYTRAL210BL   | NSYTRAB560                   |
| NSYTRR24MP   | NSYTRAC24                         | NSYTRACR24              | NSYTRACR24               | NSYTRACR24                | NSYTRAL210GR   | NSYTRAB570                   |
| NSYTRR24MPBL | -                                 | NSYTRACR24BL            | NSYTRACR24BL             | NSYTRACR24BL              | NSYTRAL220     | NSYTRAB580                   |
| -            | NSYTRACE24                        | NSYTRACRE24             | NSYTRACRE24              | NSYTRACRE24               | -              | NSYTRAB590                   |
| -            | -                                 | -                       | -                        | -                         | -              | NSYTRAB5100                  |
| -            | NSYTRACE26                        | NSYTRACRE26             | NSYTRACPE26              | NSYTRACPE26               | -              | NSYTRAB51100                 |
| -            | -                                 | -                       | -                        | -                         | -              | -                            |
| -            | NSYTRAC22                         | NSYTRACR42              | NSYTRACR42               | NSYTRACR42                | NSYTRAL42      | NSYTRAB610                   |
| -            | NSYTRAC22BL                       | -                       | -                        | -                         | NSYTRAL43      | NSYTRAB620                   |
| -            | -                                 | -                       | -                        | -                         | NSYTRAL44      | NSYTRAB630                   |
| -            | NSYTRAC23                         | NSYTRACR43              | NSYTRACP43               | NSYTRACP43                | NSYTRAL45      | NSYTRAB640                   |
| -            | -                                 | -                       | -                        | -                         | NSYTRAL410     | ...                          |
| -            | NSYTRAC24                         | NSYTRACR44              | NSYTRACP44               | NSYTRACP44                | NSYTRAL410BL   | NSYTRAB690                   |
| -            | -                                 | -                       | -                        | -                         | NSYTRAL410GR   | NSYTRAB6100                  |
| -            | NSYTRACE24                        | NSYTRACRE44             | -                        | -                         | NSYTRAL420     | NSYTRAB61100                 |
| -            | -                                 | -                       | -                        | -                         | -              | -                            |
| -            | NSYTRAC22                         | NSYTRACR62              | -                        | -                         | NSYTRAL62      | NSYTRAB810                   |
| -            | NSYTRAC22BL                       | -                       | -                        | -                         | NSYTRAL65      | NSYTRAB820                   |
| -            | NSYTRAC22                         | NSYTRACR102             | -                        | -                         | NSYTRAL102     | NSYTRAB1010                  |
| -            | NSYTRAC22BL                       | -                       | -                        | -                         | -              | NSYTRAB1020                  |
| -            | NSYTRAC162                        | NSYTRACR162             | -                        | -                         | NSYTRAL162     | NSYTRAB1010                  |
| -            | -                                 | -                       | -                        | -                         | -              | NSYTRAB1020                  |
| -            | NSYTRAC22                         | NSYTRACR22              | NSYTRACR22               | NSYTRACR22                | -              | -                            |
| -            | NSYTRAC23                         | NSYTRACR23              | NSYTRACR23               | NSYTRACR23                | -              | -                            |
| -            | NSYTRAC24                         | NSYTRACR24              | NSYTRACR24               | NSYTRACR24                | -              | -                            |
| -            | NSYTRAC22                         | NSYTRACR42              | NSYTRACR42               | NSYTRACR42                | -              | -                            |
| -            | NSYTRAC23                         | NSYTRACR43              | NSYTRACP43               | NSYTRACP43                | -              | -                            |
| -            | NSYTRAC24                         | NSYTRACR44              | NSYTRACP44               | NSYTRACP44                | -              | -                            |
| -            | NSYTRAC22                         | NSYTRACR62              | -                        | -                         | -              | -                            |
| -            | NSYTRAC22                         | NSYTRACR102             | -                        | -                         | -              | -                            |
| -            | NSYTRAC162                        | NSYTRACR162             | -                        | -                         | -              | -                            |
| -            | NSYTRAC23                         | NSYTRACR23              | NSYTRACPK22              | NSYTRACPK22               | -              | -                            |
| -            | NSYTRAC23                         | -                       | -                        | -                         | -              | -                            |
| -            | -                                 | NSYTRACR24              | NSYTRACPK23              | NSYTRACPK23               | -              | -                            |
| -            | -                                 | -                       | -                        | -                         | -              | -                            |
| -            | NSYTRACED24                       | Included                | -                        | -                         | -              | -                            |
| -            | Included                          | -                       | -                        | -                         | -              | -                            |
| -            | Included                          | -                       | -                        | -                         | -              | -                            |
| -            | Included                          | -                       | -                        | -                         | -              | -                            |
| -            | Included                          | Included                | NSYTRACR42               | NSYTRACR42                | -              | -                            |
| -            | NSYTRACT22                        | -                       | -                        | -                         | -              | -                            |
| -            | NSYTRACT22                        | -                       | -                        | -                         | -              | -                            |
| -            | NSYTRACT22                        | -                       | -                        | -                         | -              | -                            |

### Cable ends compatible with all technologies

| Wires cross section area | References |
|--------------------------|------------|
| 0.5 mm <sup>2</sup>      | DZ5CE005   |
|                          | DZ5CA005   |
| 0.75 mm <sup>2</sup>     | DZ5CE007   |
|                          | DZ5CA007   |
| 1 mm <sup>2</sup>        | DZ5CE010   |
|                          | DZ5CA010   |
| 1.5 mm <sup>2</sup>      | DZ5CE015   |
|                          | DZ5CA015   |
| 2.5 mm <sup>2</sup>      | DZ5CE025   |
|                          | DZ5CA025   |
| 4 mm <sup>2</sup>        | DZ5CE042   |
|                          | DZ5CA042   |
| 6 mm <sup>2</sup>        | DZ5CE062   |
|                          | DZ5CA062   |
| 10 mm <sup>2</sup>       | DZ5CE102   |
|                          | DZ5CA102   |
| 16 mm <sup>2</sup>       | DZ5CE162   |
|                          | DZ5CA162   |
| 25 mm <sup>2</sup>       | DZ5CE252   |
|                          | DZ5CA253   |
| 35 mm <sup>2</sup>       | DZ5CE352   |
|                          | DZ5CA352   |
| 50 mm <sup>2</sup>       | DZ5CE502   |
|                          | DZ5CA502   |

DZ5CE\*\*\* = standard insulated cable ends.  
DZ5CA\*\*\* = markable insulated cable ends.

G



# Functional partitioning

## Main distribution

|                                                      |            |
|------------------------------------------------------|------------|
| <b>IS Service Indices</b>                            |            |
| Presentation                                         | H-2        |
| <b>Form partitioning</b>                             |            |
| Presentation                                         | H-3        |
| <b>Form 1 partitioning</b>                           |            |
| Covering the supply terminals on the incoming device | H-4        |
| <b>Form 2 partitioning</b>                           | <b>H-5</b> |
| <b>Form 3 partitioning</b>                           | <b>H-6</b> |
| <b>Form 4 partitioning</b>                           | <b>H-7</b> |
| <b>Other partitions</b>                              | <b>H-8</b> |

# IS Service Indices Presentation

## What is the service index?

- The service index is a tool for characterizing the functional units of low voltage switchboards.
- It allows users to express their needs in relation to the switchboard lifecycle (operation, maintenance, evolution) to meet the requirements of their site.

## How is it characterized?

- The SI is a value expressed in a three digits format (from 1 to 3) which respectively translate the level of:
  - operation,
  - maintenance,
  - and evolution of the LV switchboard
- The value 1 offers the lowest service index and the value 3 the highest service index.
- The minimum index is 111 and the maximum is 333.

**Note:** The service index may be different in the same switchboard, for incomers or outgoings, in order to meet the customer needs.

|          | 1st digit<br><b>Exploitation</b><br>The exploitation includes all the operations on the installation likely to be carried out by personnel electrician or non-electrician.             | 2nd digit<br><b>Maintenance</b><br>Maintenance includes the maintenance operations, repair and control operations to sustain the characteristics of the switchboard. Assured by qualified personnel, they go from diagnosis to defective parts replacement. | 3rd digit<br><b>Upgrade</b><br>Upgrade is an adaptation of the installation by adding or replacing components. Some upgrades require an interruption of the functional unit concerned: power increase, change of technology, etc. Other evolutions can be done without interruption of the functional unit: addition of outgoings, etc. |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>1</b> | I accept that this operation will cause the complete shutdown of the switchboard.                                                                                                      | I accept the complete stop of the switchboard.                                                                                                                                                                                                              | I accept the complete stop of the switchboard.                                                                                                                                                                                                                                                                                          |
| <b>2</b> | I want this operation to result only in the complete shutdown of the only functional unit (1) concerned.                                                                               | I want a limited interruption to the functional unit (1) concerned only. The refitting will be done by an intervention on the connections.                                                                                                                  | I want that the possible interruption be limited to the functional unit (1) concerned only. A stock of some predefined functional units is assured.                                                                                                                                                                                     |
| <b>3</b> | I want that this operation only stops the power of the functional unit (1) concerned, but enables automation tests that allow testing the installation in full size before restarting. | I want a limited interruption to the functional unit (1) concerned only. The refitting will be done without any intervention on the connections.                                                                                                            | I want an operation limited to the functional unit (1) concerned, with no interruption of the switchboard. The evolution is free, within the limits imposed by the switchboard manufacturer.                                                                                                                                            |

(1) Functional unit: part of an assembly comprising all the mechanical and electrical components that contribute to the performance of a single feature.

## Service indices achievable in PrismaSeT Plus P

| IS 211<br>Fixed                                                                     | IS 231 or 232<br>Plug-in base                                                       |                                                                                     | IS 331 or 332<br>Withdrawable on chassis                                                  |                                                                                      | IS 223<br>Scalable system under power                                                 |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |        |  |  |
| <b>IS 211</b><br>functional unit equipped with fixed circuit breakers               | <b>IS 231</b><br>functional unit equipped with a plug-in circuit-breaker            | <b>IS 232</b><br>reserve functional unit equipped with an empty plug-in base        | <b>IS 331</b><br>functional unit equipped with a withdrawable circuit breakers on chassis | <b>IS 332</b><br>reserve functional unit equipped with an empty chassis              | <b>IS 223</b><br>possible under conditions. Consult us                                |

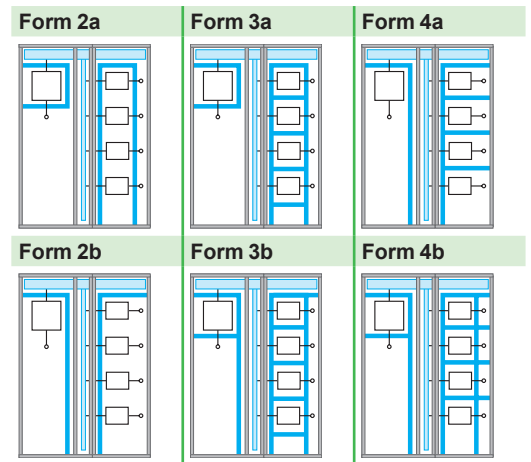
# Forms partitioning

## Presentation

### What are the forms?


- The forms are metal partitions or molded material, removable by using tools or keys, which ensure the protection of operators against direct contact with power conductors when working on low voltage switchboards.
- They also protect internal elements of the switchboard against external aggressions (dust, pests, water ...).
- These forms are graduated from 1 to 4, with indices "a" or "b". Their use contributes to the level of service continuity required by the user.
- Forms have a cumulative effect (a higher form integrates the characteristics of the forms that precede it).
- The choice of a form is the subject to an agreement between the manufacturer and the user.
- The electrical panel must comply with the degree of protection IP 2X, according to standard IEC 61439-1 & 2.

PrismaSeT P Active offers solutions for forms 1, 2a, 2b, 3a, 3b, 4a, 4b.




#### Form 1

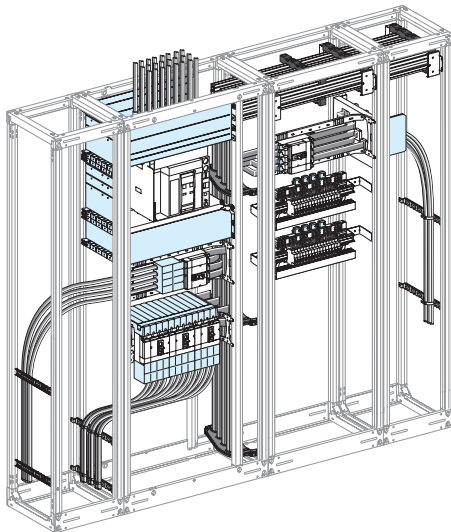No internal separation




#### Form 2

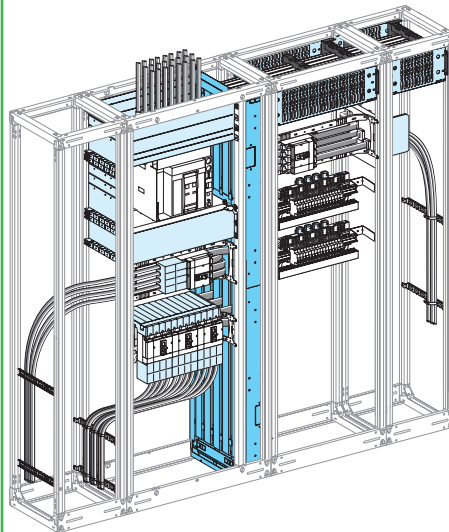Separation between horizontal busbars, vertical busbars and functional units




#### Form 3

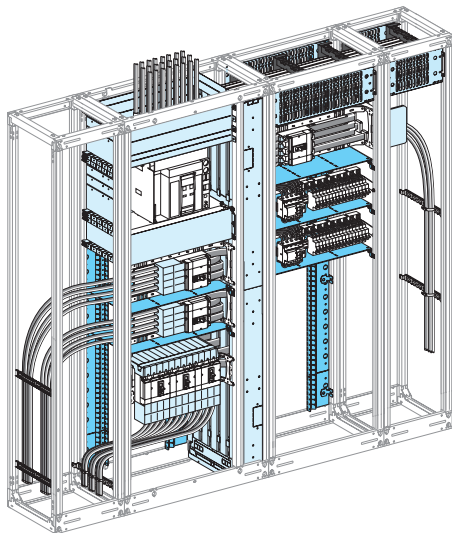Form 2 + separation of functional units from one another



#### Form 4

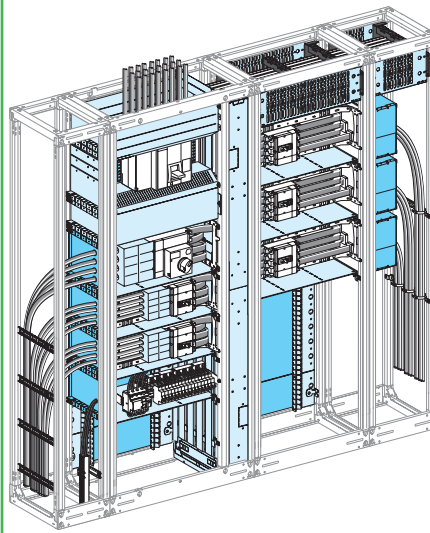Form 3 + separation of the terminals of the functional units from one another









H

# Form 1 partitioning


Covering the supply terminals on the incoming device

Main distribution

|                                                                                   |  | Front connection with cables                                                      |          |             |               | Canalis front connection                                                           |          |             |               |
|-----------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------|----------|-------------|---------------|------------------------------------------------------------------------------------|----------|-------------|---------------|
|  |  |  |          |             |               |  |          |             |               |
| Devices                                                                           |  | Fixed or withdrawable device                                                      |          | Fixed       | With-drawable | Fixed or withdrawable device                                                       |          | Fixed       | With-drawable |
|                                                                                   |  | MasterPacT                                                                        |          | ComPacT     |               | MasterPacT                                                                         |          | ComPacT     |               |
|                                                                                   |  | MTZ2                                                                              | MTZ1     | NS630b/1600 | NS630b/1600   | MTZ2                                                                               | MTZ1     | NS630b/1600 | NS630b/1600   |
| Cover                                                                             |  | LVS04861                                                                          | LVS04852 | LVS04851    | LVS04852      | LVS04861                                                                           | LVS04852 | LVS04851    | LVS04852      |
| Canalis additional cover                                                          |  | -                                                                                 | -        | -           | -             | LVS04871                                                                           | LVS04871 | LVS04871    | LVS04871      |

|                                                                                    |  | Rear connection with cables                                                        |          |             |               | Canalis rear connection                                                             |          |             |               |
|------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------|----------|-------------|---------------|-------------------------------------------------------------------------------------|----------|-------------|---------------|
|  |  |  |          |             |               |  |          |             |               |
| Devices                                                                            |  | Fixed or withdrawable device                                                       |          | Fixed       | With-drawable | Fixed or withdrawable device                                                        |          | Fixed       | With-drawable |
|                                                                                    |  | MasterPacT                                                                         |          | ComPacT     |               | MasterPacT                                                                          |          | ComPacT     |               |
|                                                                                    |  | MTZ2                                                                               | MTZ1     | NS630b/1600 | NS630b/1600   | MTZ2                                                                                | MTZ1     | NS630b/1600 | NS630b/1600   |
| Cover                                                                              |  | LVS04863                                                                           | LVS04854 | LVS04853    | LVS04854      | LVS04863                                                                            | LVS04854 | LVS04853    | LVS04854      |
| Canalis additional cover                                                           |  | -                                                                                  | -        | -           | -             | LVS04871                                                                            | LVS04871 | LVS04871    | LVS04871      |

## Covering of the connection between an incoming device and lateral busbars



|                                    | MasterPacT MTZ2 | MasterPacT MTZ1 | ComPacT NS630b/1600 | ComPacT NS1600b/3200 <sup>(1)</sup> | ComPacT INS-INV630b/2500 |
|------------------------------------|-----------------|-----------------|---------------------|-------------------------------------|--------------------------|
| Cover with copper connection       | LVS04926        | LVS04926        | LVS04926            | LVS04926                            | LVS04926                 |
| Additional cover                   | LVS04927        | -               | -                   | -                                   | -                        |
| Cover with Linergy LGYE connection | LVS04925        | LVS04925        | -                   | -                                   | -                        |
| Additional cover                   | LVS04928        | -               | -                   | -                                   | -                        |
| Form partition depth               | 600             | 400             | 400                 | 400 <sup>(1)</sup>                  | 400                      |





(1) For more information > page E-14.


**Note:** Cubicle depth based on the depth of the incoming device.

## Main distribution
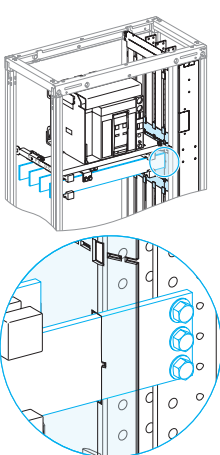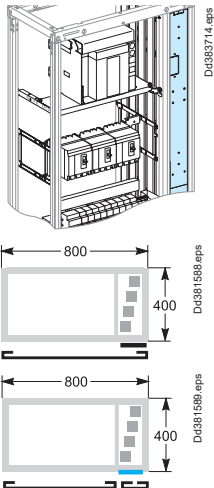
### Lateral partitioning

- Made of:
  - four supports that clip to the framework
  - five extruded slats that clip to the supports
  - two metal plates at the top and bottom that can be cut out to pass a PE or PEN conductor, or one or two 30 x 60 mm trunking sections
- Compliance with standard IEC 695.2.1 concerning withstand to fire.

|                        | Side barrier                                                                                                                                                                                                                                                                                                                                                                                                          | Restoration kit                                                                                                                                                                                                                                                                                                                                                                                     | Front or rear barrier                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                     |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                        |                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |
|                        |                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                     | W = 150 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | W = 300 mm                                                                          |
| <b>Characteristics</b> | <ul style="list-style-type: none"> <li>■ Vertical barrier made of insulating slats</li> <li>■ can be installed on both sides of Linergy BS or Linergy LGY busbars</li> <li>■ The space between the slats is sufficient for prefabricated connections (one copper bar, 5 or 10 mm thick, or insulated flexible bars) or for cables up to 35 mm<sup>2</sup>, while maintaining the degree of protection IP2X</li> </ul> | <ul style="list-style-type: none"> <li>■ This kit enables passage of the connection between a device &gt; 1600 A (MTZ2, INS-INV) and lateral vertical busbars.</li> <li>■ It is made up of an insulated plate (six modules high = 300 mm) that can be cut as required, supplied with supports and the necessary hardware.</li> <li>■ Has to be use with MTZ2 interlocking mounting plate</li> </ul> | <p>Can be installed in the front and rear of the busbar compartment. Protects against direct contact with the busbars.</p> <ul style="list-style-type: none"> <li>■ For 800 mm cubicles :                             <ul style="list-style-type: none"> <li>□ the door is systematically supplied with a barrier.</li> <li>□ the cover frame is supplied with a wicket door, W = 150 mm, on which devices can be mounted. A front barrier is indispensable.</li> <li>■ A barrier is required at the rear of the busbar compartment in cubicles that are 600, 800 and 1000 mm deep.</li> </ul> </li> </ul> |                                                                                     |
| <b>Catalog number</b>  | LVS04922                                                                                                                                                                                                                                                                                                                                                                                                              | LVS04924                                                                                                                                                                                                                                                                                                                                                                                            | LVS04921                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | LVS04920                                                                            |



### Horizontal partitioning

- Set of two barriers (front and rear), plus a slotted rear panel for efficient natural convection in the switchboard.
- The set can be used to partition horizontal busbars installed at the top or bottom of the cubicle.
- The space required for the busbars is not increased.

LVS04976

|              |            | Linergy LGYE |          |                     |                     | Linergy BS   |          |                     |
|--------------|------------|--------------|----------|---------------------|---------------------|--------------|----------|---------------------|
|              |            | Top position |          | Bottom position     |                     | Top position |          | Bottom position     |
|              |            | In           | ≤ 2500 A | ≥ 3200 A            | ≤ 2500 A            | ≥ 3200 A     | ≤ 3200 A | 4000 A              |
| Nb of module |            |              | 3        | 4                   | 3                   | 4            | 3        |                     |
| <b>D400</b>  |            |              |          |                     |                     |              |          |                     |
| Cover        | W = 300    | LVS04973     | LVS04963 | LVS04973 + LVS04915 | LVS04963 + LVS04915 | LVS04973     | LVS04963 | LVS04973 + LVS04915 |
|              | W = 400    | LVS04974     | LVS04964 | LVS04974 + LVS04915 | LVS04964 + LVS04915 | LVS04974     | LVS04964 | LVS04974 + LVS04915 |
|              | W650       | LVS04976     | LVS04966 | LVS04976 + LVS04919 | LVS04966 + LVS04919 | LVS04976     | LVS04966 | LVS04976 + LVS04919 |
|              | W650 + 150 | LVS04976     | LVS04966 | LVS04976 + LVS04919 | LVS04966 + LVS04919 | LVS04976     | LVS04966 | LVS04976 + LVS04919 |
|              | W800       | LVS04978     | LVS04968 | LVS04978 + LVS04919 | LVS04968 + LVS04919 | LVS04978     | LVS04968 | LVS04978 + LVS04919 |
| <b>D600</b>  |            |              |          |                     |                     |              |          |                     |
| Cover        | W = 300    | LVS04983     | LVS04963 | LVS04983 + LVS04915 | LVS04963 + LVS04915 | LVS04983     | LVS04963 | LVS04983 + LVS04915 |
|              | W = 400    | LVS04984     | LVS04964 | LVS04984 + LVS04915 | LVS04964 + LVS04915 | LVS04984     | LVS04964 | LVS04984 + LVS04915 |
|              | W650       | LVS04986     | LVS04966 | LVS04986 + LVS04919 | LVS04966 + LVS04919 | LVS04986     | LVS04966 | LVS04986 + LVS04919 |
|              | W650 + 150 | LVS04986     | LVS04966 | LVS04986 + LVS04919 | LVS04966 + LVS04919 | LVS04986     | LVS04966 | LVS04986 + LVS04919 |
|              | W800       | LVS04988     | LVS04968 | LVS04988 + LVS04919 | LVS04968 + LVS04919 | LVS04988     | LVS04968 | LVS04988 + LVS04919 |


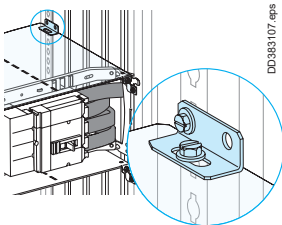


**Note:** when the busbars are at the bottom of the cubicle, gland plates are mandatory > page F-19.

**Note:** to protect horizontal busbars installed at the bottom of the cubicle, the slotted horizontal panel must be replaced by a plain barrier (LVS04915 or LVS04919) and add a free support LVS04662.







Main distribution

Form 3 partitioning




|                 | Front connection                                                                                              |                                                                                                                                               |                                                                                                                                                             | Rear connection                                                                     |                |
|-----------------|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------|
|                 |                              |                                                              |                                                                           |  |                |
|                 | <b>Rear support for partitions<br/>W = 650 mm</b>                                                             | <b>6 universal angle brackets</b>                                                                                                             | <b>Horizontal metal partition<br/>W = 650 mm</b>                                                                                                            | <b>Rear connection</b>                                                              |                |
| Characteristics | Two uprights secured to the framework (400 mm deep) or to the intermediate uprights (600 mm deep frameworks). | A set of brackets can be used to install partial Form 3 partitioning in the cubicle. It does not take up any useful space in the switchboard. | A horizontal metal partition can be used to physically separate functional units from one another. It does not take up any useful space in the switchboard. | Vertical partitions (two cat. no. per functional unit)                              |                |
|                 |                                                                                                               |                                                                                                                                               |                                                                                                                                                             | 3 to 4 modules                                                                      | 5 to 6 modules |
| Catalog numbers | LVS04943                                                                                                      | LVS03583                                                                                                                                      | LVS04901                                                                                                                                                    | LVS04955                                                                            | LVS04956       |

Main distribution

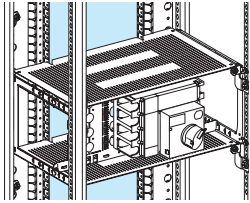Form 4a partitioning



| Form 4 - direct connection to the device |                                                                                                                                                                                              |                                                                                                                    |                                                                                     |                                                                                                                          |
|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
|                                          | Front connection                                                                                                                                                                             |                                                                                                                    | Rear connection                                                                     |                                                                                                                          |
|                                          |                                                                                                             |                                   |  |                                       |
|                                          | <b>Backplate</b>                                                                                                                                                                             | <b>Gland plate</b>                                                                                                 |                                                                                     |                                                                                                                          |
| Characteristics                          | ■ a backplate (one cat. no. per cubicle) made up to two metal half panels mounted on the rear supports for Form 3 partitions. This backplate is not indispensable for 400 mm deep frameworks | ■ a plastic gland plate that can be easily cut out (one for each functional unit) and is mounted on the framework. |                                                                                     | ■ a gland plate at the rear of each functional unit. It is connected directly to the rear supports for Form 3 partitions |
|                                          |                                                                                                                                                                                              | 3 to 4 modules                                                                                                     | 5 to 6 modules                                                                      |                                                                                                                          |
| Catalog numbers                          | LVS04946                                                                                                                                                                                     | LVS04951                                                                                                           | LVS04952                                                                            | LVS04951 LVS04952                                                                                                        |

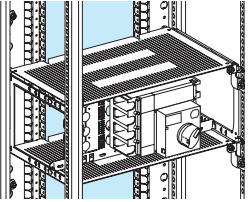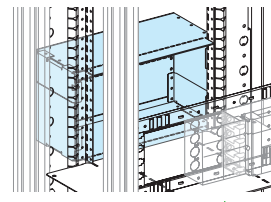Form 4b partitioning

| Forme 4b - connection transfer |                                                                                                                                                                                              |                                                                                        |                                                                                       |                                                                                                                                |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
|                                | In a lateral compartment                                                                                                                                                                     |                                                                                        | At the rear of the cubicle                                                            |                                                                                                                                |
|                                |                                                                                                           |     |  |                                           |
|                                | <b>Backplate</b>                                                                                                                                                                             | <b>Cover</b>                                                                           |                                                                                       |                                                                                                                                |
| Characteristics                | ■ a backplate (one cat. no. per cubicle) made up to two metal half panels mounted on the rear supports for Form 3 partitions. This backplate is not indispensable for 400 mm deep frameworks | ■ a cover with plastic gland plates that can be easily cut out on the side and bottom. |                                                                                       | ■ It comprises two height-adjustable metal flanges and plastic gland plates that can be easily cut out at the rear and bottom. |
|                                |                                                                                                                                                                                              | 3 to 5 modules W150                                                                    | 4 to 6 modules W200                                                                   |                                                                                                                                |
| Catalog numbers                | LVS04946                                                                                                                                                                                     | LVS04953                                                                               | LVS04954                                                                              | LVS04953 LVS04954                                                                                                              |

Main distribution

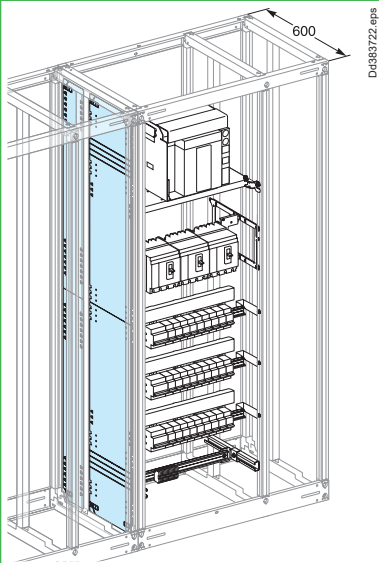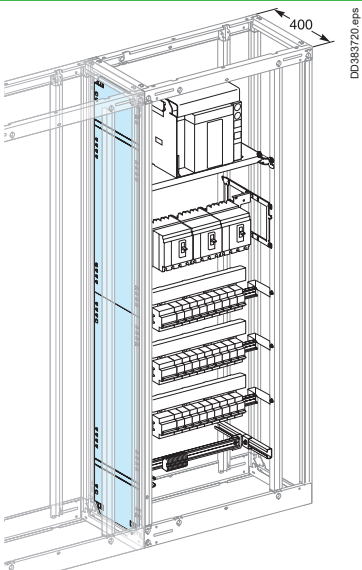Inter-cubicle partition



**D400**

**D600**

Characteristics

Metal partition, used to separate two adjacent cubicles.  
It is made up of two panels, each 850 mm high.  
The top and bottom ends have knock-outs for busbars, PE/PEN conductors or auxiliary wiring.  
Supplied with the necessary supports and hardware, the partition is mounted on the framework and does not hinder installation of the functional mounting plates.

Catalog numbers

**LVS04911**

**LVS04911 + LVS04931**



# Additional information

## Contents

## Spare parts

|                                                           |            |
|-----------------------------------------------------------|------------|
| <b>After-sales accessories</b>                            | <b>I-4</b> |
| <b>Optimise electrical networks</b>                       |            |
| Improving power quality                                   | I-9        |
| Additional equipment to optimise electrical installations | I-10       |

## Electrical characteristics

|                                                           |             |
|-----------------------------------------------------------|-------------|
| <b>Designing PrismaSeT P Active power circuits</b>        |             |
| Presentation and approach                                 | I-11        |
| <b>Designing horizontal busbars</b>                       |             |
| Linery LGE                                                | I-14        |
| Linery BS                                                 | I-15        |
| <b>Designing vertical busbars</b>                         |             |
| Linery LGE                                                | I-16        |
| Linery LGE                                                | I-17        |
| Linery BS                                                 | I-18        |
| <b>Designing rear busbars</b>                             |             |
| Linery LGE, Linery BS                                     | I-19        |
| <b>Designing connections between a device and busbars</b> |             |
| Prefabricated connections for ComPacT NS630b to NS1600    | I-20        |
| Prefabricated connections for MasterPacT 06-16            | I-21        |
| Prefabricated connections for ComPacT NS630b to NS1000    | I-22        |
| Fixed MasterPacT 08-16                                    | I-23        |
| Fixed MasterPacT 08-32                                    | I-24        |
| Drawout MasterPacT 08-16                                  | I-25        |
| Drawout MasterPacT 08-32                                  | I-26        |
| <b>Designing connections between a device and busbars</b> |             |
| <b>Dedicated cubicle</b>                                  |             |
| Fixed MasterPacT 08-32                                    | I-27        |
| Drawout MasterPacT 08-32                                  | I-28        |
| <b>Designing horizontal busbars</b>                       |             |
| Linery LGE                                                | I-29        |
| Linery BS                                                 | I-30        |
| <b>Designing vertical busbars</b>                         |             |
| Linery LGE                                                | I-31        |
| Linery LGE                                                | I-32        |
| Linery BS                                                 | I-33        |
| <b>Designing rear busbars</b>                             | <b>I-34</b> |
| <b>Designing connections between a device and busbars</b> |             |
| Prefabricated connections for ComPacT NS630b to NS1600    | I-35        |
| Prefabricated connections for MasterPacT 06-16            | I-36        |
| Prefabricated connections for ComPacT NS630b to NS1000    | I-37        |
| Fixed MasterPacT 08-16                                    | I-38        |
| Fixed MasterPacT 08-32                                    | I-39        |
| Drawout MasterPacT 08-16                                  | I-40        |
| Drawout MasterPacT 08-32                                  | I-41        |



## Contents

|                                                                 |             |
|-----------------------------------------------------------------|-------------|
| <b>Designing connections ≤ 630 A</b>                            | <b>I-42</b> |
| Device connections                                              | I-42        |
| ComPacT circuit breakers NSX100 to NSX630                       |             |
| Insulated flexible copper bars                                  | I-43        |
| ComPacT circuit breakers NSX100 to NSX630                       |             |
| Copper cable                                                    | I-44        |
| ComPacT circuit breakers NSXm up to 160                         |             |
| Copper cable                                                    | I-45        |
| <b>Designing cable connections</b>                              |             |
| Tubular lugs                                                    | I-46        |
| <b>Designing customer connections</b>                           |             |
| Prefabricated connections for ComPacT NS630b to NS1600          | I-47        |
| Prefabricated connections for MasterPacT 06-16                  | I-48        |
| Connection transfer assembly for fixed ComPacT NS630b to NS1000 | I-49        |
| Fixed MasterPacT 08-16                                          | I-50        |
| Fixed MasterPacT 08-40                                          | I-51        |
| Drawout MasterPacT 08-16                                        | I-52        |
| MasterPacT 08-40 withdrawable                                   | I-53        |
| Fixed MasterPacT 06-16                                          | I-54        |
| Drawout MasterPacT 06-16                                        | I-55        |
| Fixed ComPacT NS1600b to NS3200                                 | I-56        |
| Fixed ComPacT NS630b to NS1600                                  | I-57        |
| Withdrawable ComPacT NS630b to NS1600                           | I-58        |
| Fixed ComPacT NS630b to NS1000 Horizontal mounting              | I-59        |
| <b>Designing busbars</b>                                        |             |
| Fupact GS, ISFT, ISFL Linergy BS busbars                        | I-60        |
| Fupact GS, ISFT Vertical Linergy LGYE, LGY busbars              | I-61        |
| Fupact GS, ISFT Vertical Linergy BS busbars                     | I-62        |

## Enclosure characteristics

|                                                          |             |
|----------------------------------------------------------|-------------|
| <b>Selection of enclosures according to the premises</b> | <b>I-63</b> |
|----------------------------------------------------------|-------------|



## After-sales accessories



## Spare parts

## Linergy BW busbar accessories

Linergy BW accessories, 160/400 A

LVS01210



DD38453.eps



- 1 2 end plugs
- 2 2 angle brackets support
- 3 2 screws

Accessoires Linergy BW 630 A


LVS01211



- 1 2 end plugs
- 2 2 metal angle brackets
- 3 2 brackets for support
- 4 2 hexagonal blocks
- 5 2 self-tapping screws

2 IPxxB clipon covers for Linergy BW, 160 to 400 A

LVS01201




## Linergy FM busbar accessories (IP30)

4 terminal covers for 200 A Linergy FM

LVS01202

DD384561.eps




## Linergy busbar accessories (IP30)

12 chocks for Linergy busbars

LVS01109

DD384574.eps




## Framework accessories


Framework accessories

LVS01104

DD384552.eps



- 1 4 top sealing components
- 2 4 bottom sealing components
- 3 4 bottom cross-piece plugs
- 4 2 adjacent mounting spacer tubes



- 5 2 mounting hardware
- 6 12 conical washers

### Spare parts

#### Front-plate accessories

10 sets of 2 grips quarter turn

LVS01094




DD384582.eps

#### Accessory

Plain wicket door, W = 150 mm

LVS01110




DD384565.EPS

#### Linergy LGYE busbar accessories

Linergy LGYE connection screwplate kit

LVS01130




DD385489.eps

- 1 4 plates for 2000 - 4000 A joint
- 2 4 flat plates for 3200 - 4000 A connection
- 3 16 conical contact washer Ø8
- 4 16 torque nut M8

#### Rear accessories

Accessories IP55

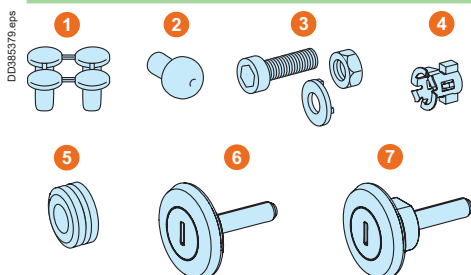LVS01101



DD385379.eps

- 1 4 IP55 framework plugs
- 2 4 stop doors
- 3 base + screw + washer + nut
- 4 8 cage nuts
- 5 3 white grommet plugs
- 6 2 IP55 roof and rear panel fixing systems
- 7 6 IP55 rear panel fixing systems

#### Rear panel accessories

LVS01106



DD385977.eps

- 1 8 IP30 rear panel fixing systems
- 2 2 IP30 roof and rear panel fixing systems

### Spare parts

#### Side panel accessories


##### Side panel accessories

LVS01100




##### Accessories for IP55 side panel

LVS01102



##### Accessories for IP55 roof

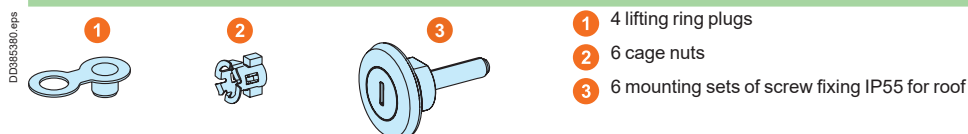LVS01103



#### Roof accessories

##### Roof accessories


LVS01112



#### Front plate support frames

##### Front plate support striker kit for LVS08564 - LVS08566

LVS01123



#### Side-by-side combination kit

|                 | PrismaSeT P Active/ PrismaSeT P Active                                                                                                                                                                                                  | PrismaSeT P Active/PrismaSeT 6300 A                                                                                                                                                                                                                                                                                                                                                |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 | <p>DD382826 eps</p>                                                                                                                                                                                                                     | <p>DD383847 eps</p>                                                                                                                                                                                                                                                                                                                                                                |
| Catalog number  | LVS01199                                                                                                                                                                                                                                | LVS01198                                                                                                                                                                                                                                                                                                                                                                           |
| Characteristics | <p>■ To add a PrismaSeT P Active cubicle to an existing PrismaSeT installation, use the combination kit and a 400 mm wide frame.</p> <p>DD385279 eps</p> <p>PrismaSeT P Active PrismaSeT P Active PrismaSeT P Active</p> <p>x 400 x</p> | <p>■ PrismaSeT 6300 A/PrismaSeT P Active side-by-side combination kit</p> <p><b>Note:</b> When combining PrismaSeT 6300 A and PrismaSeT P Active IP55 enclosures, use the IP55 sealing kit for side-by-side combinations (LVS08717) together with the side-by-side combination kit (LVS01198).</p> <p>DD385278 eps</p> <p>PrismaSeT PH PrismaSeT P Active</p> <p>300-700-900 x</p> |


## After-sales accessories

## Spare parts

## Framework accessories

## Framework accessories

DD384572 EPS



Frame bottom cross-member W650 to use with LVS08566

LVS01120 (1)

Frame bottom cross-member W150+650 to use with LVS08566

LVS01121 (1)


(1) Spare parts on stock in RAL 9003 only.

## Door accessories

## Closing accessories

LVS01105

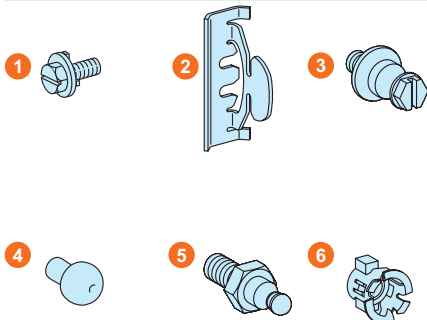DD384617 eps




- 1 4 screws THF M6 x 16
- 2 4 door strikes
- 3 3 1/4 turn studs
- 4 2 stop doors
- 5 3 hinge pins
- 6 7 captive nuts for frame

## Door strike IP30/55 lpc Arc

LVS01124

DD436601 eps




- 1 4 screws MSC HXG SK M6 x 20
- 2 4 door strike stoppers
- 3 4 washers
- 4 4 captive nuts for frame

## PrismaSeT P Rotary Handle Spare Parts

LVS01219

m23131101\_1.eps




- 1 Handle housing block
- 2 P adapter link part
- 3 Screw, pan head, M5x8
- 4 The key of 405
- 5 1 crosshead screw
- 6 Omega fix part
- 7 Driver block
- 8 Hex locking screw, M6x10
- 9 Self tapping screw, pan head, ST3.5x15



## After-sales accessories

## Cover accessories

## Cover accessories



|                                              |                 |
|----------------------------------------------|-----------------|
| Set of 2 side panels D400 PrismaSeT P Active | <b>LVS08755</b> |
| Set of 2 side panels D600 PrismaSeT P Active | <b>LVS08765</b> |
| Set of 2 side panels D400 PrismaSeT P Active | <b>LVS08750</b> |
| Set of 2 side panels D600 PrismaSeT P        | <b>LVS08760</b> |
| Green Cover W400 P for Wireless PaS          | <b>LVS01126</b> |
| Green Cover W650 P for Wireless PaS          | <b>LVS01127</b> |
| Green Cover W800 P for Wireless PaS          | <b>LVS01128</b> |

## Connectivity accessories

## Connectivity accessories

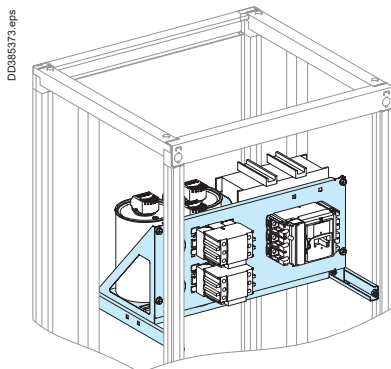
|                                                                  |                 |
|------------------------------------------------------------------|-----------------|
| Cable Extender for LoRa Antenna                                  | <b>SMT10015</b> |
| Cables for Wireless Panel Server 2m 3P + N                       | <b>SMT10016</b> |
| PrismaSeT Wireless Panel Server electronic part (without cables) | <b>SMT10019</b> |

## Optimise electrical networks

Improving power quality

## Spare parts

To improve power quality, Schneider Electric proposes two power-factor correction systems, VarplusCan. Both are designed for optimum installation in PrismaSeT P Active.




PrismaSeT P Active enclosures are designed for installation of the new VarplusCan power factor correction modules that improve the quality of the electrical distribution system and reduce consumption of reactive energy. The modules are made up of capacitors, contactors and devices protecting against internal faults.

### Installation
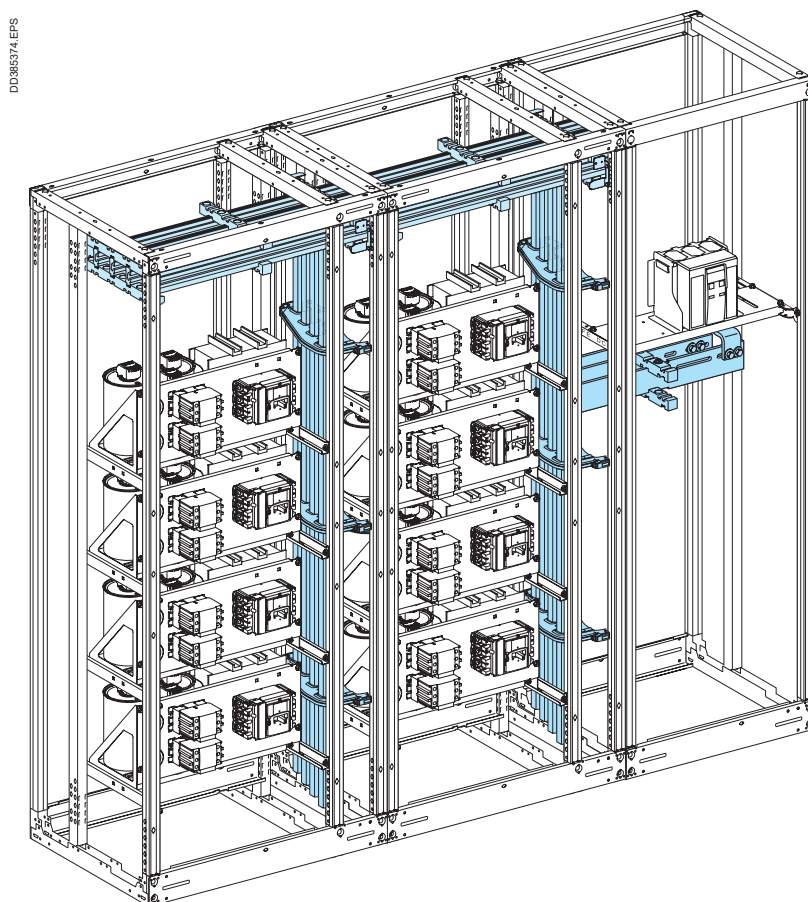
> [page E-59](#) for information on installation in the enclosure.

The modules can be supplied by vertical busbars, e.g. Linergy.



# Optimise electrical networks

Additional equipment to optimise electrical installations

## Spare parts

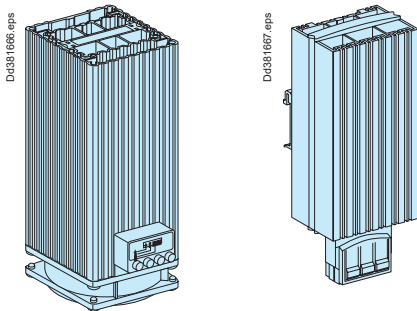
During design or during subsequent operation, electrical installations are increasingly outfitted with components designed to optimise energy consumption.

With PrismaSeT P Active, most of these products can already be added to the switchboard.

By limiting the temperature within the switchboard, it is possible to extend the life of the equipment and optimise its use.

In addition, electricity consumption is reduced because equipment in good condition has lower losses.

### Heaters




Heaters contribute to equipment optimisation by limiting condensation, corrosion and, above all, leakage currents along surfaces.

#### Installation and characteristics
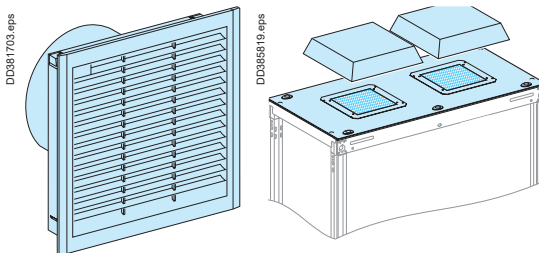
> page F-33

### Fans




Several types of fans are available: enclosure wall or roof-mount versions. They are particularly useful for switchboards installed in temperate environments or when the degree of protection of the enclosure is high (IP55).

#### Installation and characteristics

> page F-32.

### Thermostat




Thermostats are used to limit the temperature inside switchboards when heaters and fans are installed, thus reducing heat losses.

#### Installation and characteristics
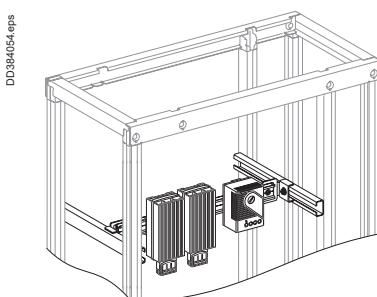
> page F-34.

### Installation



Heaters and thermostats simply clip onto a modular rail.

See Universal Enclosures catalog, cat. no. **UE12MK01EN**.

# Designing PrismaSeT P Active power circuits

## Presentation and approach

### Electrical characteristics

PrismaSeT P Active takes into account the installation and connection conditions of Schneider Electric devices.

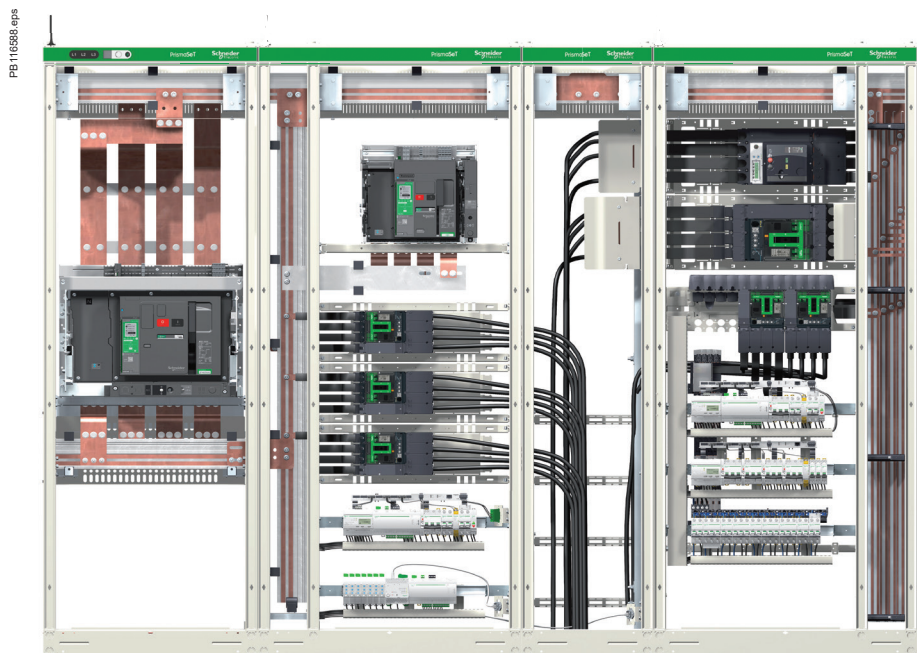
The entire installation complies with standard IEC 60439-1. The result is a type tested switchboard.

In the following pages you will find a number of examples, validated for PrismaSeT P Active switchboards, intended to assist in determining the busbars as well as the upstream and downstream connections for the installation.

The examples assume that the devices have already been selected.

A complete process involves a number of steps before making final choices (transformer, conductors, protection, etc.).

Schneider Electric offers a number of tools to assist in designing a complete installation (technical guides, software).



### Busbar sizing

The factors that must be taken into account in determining the size of busbars include:

- the diversity factor.

Not all the loads supplied by a set of busbars are used at full rated load or at the same time. The diversity factor is the means to determine the maximum load current used to size the busbars.

**Standard IEC 61439-1 and 2 §4.7 specifies the table below.**

| Number of circuits | Diversity factor |
|--------------------|------------------|
| 2 and 3            | 0,9              |
| 4 and 5            | 0,8              |
| 6 and 9            | 0,7              |
| 10 and more        | 0,6              |

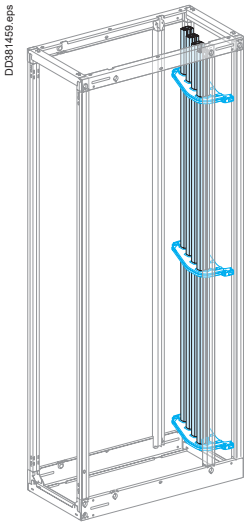
- the degree of protection IP.
- the ambient temperature around the switchboard.

# Designing PrismaSeT P Active power circuits

## Presentation and approach

### Electrical characteristics

#### Busbars



The maximum load current for a set of busbars is a function of the thermal environment.

The type and the size of the conductors must be determined in view of carrying the required currents taking into account the temperatures reached in the switchboard. These conductors are subjected to additional heat rise caused by the flowing current (joule effect) and the connected devices.

The temperatures reached by the conductors and the insulating materials, etc. must not exceed the maximum temperatures for which the products were designed. Schneider Electric busbars and distribution blocks are sized to operate without any particular constraints for the assemblies in PrismaSeT P Active switchboards operating under normal environmental conditions (standard switchboard configuration, 35 °C outside the switchboard, etc.).


To determine **Linery LGY busbars** or **Linery LGYE** required

> [pages I-14, I-16 and I-17](#).

They can be used to determine:

- the type of Linery LGY busbars or Linery LGYE, as a function of:
  - the current
  - the IP value
  - the ambient temperature around the switchboard
  - ICW/1s.

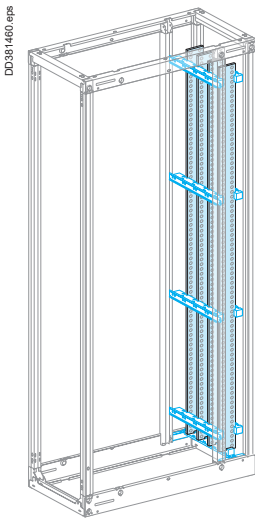- Linery LGY busbars:  $I \leq 1600 \text{ A}$
- Double Linery LGY busbars:  $1600 \text{ A} < I \leq 3200 \text{ A}$
- Linery LGYE busbars:  $\leq 4000 \text{ A}$ .



To determine the required Linery BS busbars:

horizontal busbars > [page I-15](#)

vertical busbars > [page I-18](#).

They can be used to determine:

- the permissible current as a function of:
  - the size of the busbars
  - the number of bars
  - the ambient temperature around the switchboard
  - the IP value
  - ICW/1s.

- Linery BS copper busbars 5 mm thick:  $I \leq 1600 \text{ A}$ .
- Linery BS copper busbars 10 mm thick:  $I \leq 3200 \text{ A}$ .

#### Connection of devices $\geq 630 \text{ A}$ and busbar connections

To determine the size of upstream and downstream connections for devices > [page I-42](#).

They can be used to determine:

- the size of copper busbars
- the maximum permissible current.

As a function of:

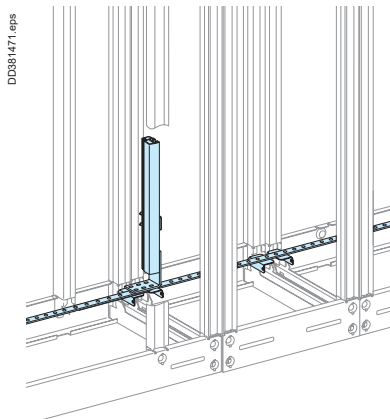
- the type of circuit breaker
- the IP value
- the ambient temperature around the switchboard
- the type of installation.

# Designing PrismaSeT P Active power circuits

## Presentation and approach

### Electrical characteristics

#### Designing the PE protective conductor



The protective conductor must be sufficiently sized and securely installed in the switchboard to accept the thermal and electrodynamic constraints of the fault current.

It must be connected to the exposed conductive parts of the switchboard. It must be accessible to enable connections both in the factory and on site.

#### Optimised calculation method

Use the calculation equation indicated in standard IEC 61439-1 & 2:

$$S_{PE} = \frac{\sqrt{I^2 t}}{k}$$

- $S_{PE}$ : cross-sectional area of the PE in mm<sup>2</sup>
- $I$ : value of the phase-to-earth fault current = 60 % of the value of the phase-to-phase fault current (IEC 61439-1 §8.2.4.2)
- $t$ : time the fault current flows in seconds
- $k$ : coefficient that depends on the type of metal,  $k = 143$  for a copper conductor with PVC insulation.

#### Example:

- $I_{sc} = 36$  kA rms C the value of the phase-to-earth fault current = 60 % of the value of the phase-to-phase fault current (standard IEC 61439-1 and 2 § 8.4.3.2.3 and 10.11.5.6), i.e.:  $36 \times 0.6 = 21.6$  kA
- maximum time delay for the control unit: 0,5 s
- $k = 143$  for copper conductors with PVC insulation.

The calculation is therefore:

$$S_{PE} = \frac{\sqrt{21600^2 \times 0,5}}{143} = 106,8 \text{ mm}^2$$

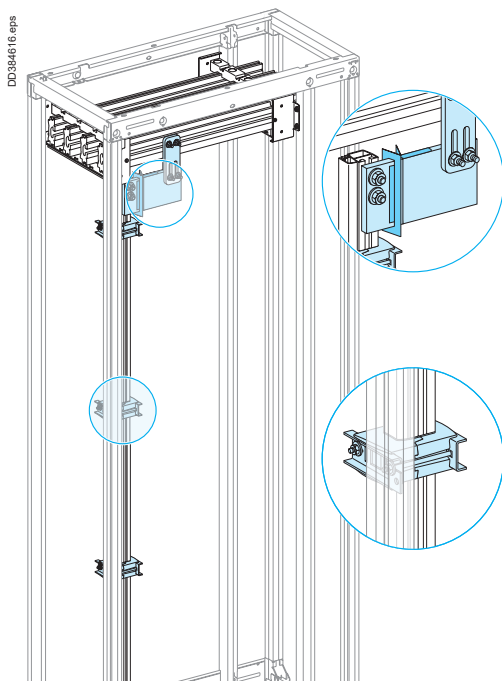
The PE conductor must therefore be a 25 x 5 mm bar (= 125 mm<sup>2</sup>).

#### Simplified method (based on the equation above)

Use the table below to determine the size of the PE conductor as a function of device short-circuit current  $I_{sc}$ .

| Size of PE conductor           | All Schneider Electric devices |                                     |
|--------------------------------|--------------------------------|-------------------------------------|
| $I_{sc} \leq 40$ kA            | 1 Linergy BS bar, 25 x 5 mm    |                                     |
| $I_{sc} \leq 65$ kA            | 1 Linergy BS bar, 50 x 5 mm    | Linerger LGY 630 - <b>LVS04502</b>  |
| $I_{sc} > 65$ kA but $< 80$ kA | 1 Linergy BS bar, 50 x 5 mm    | Linerger LGY 800 - <b>LVS04503</b>  |
| $I_{sc} = 100$ kA              | 1 Linergy BS bar, 50 x 5 mm    | Linerger LGY 1000 - <b>LVS04505</b> |

#### Implementing the PEN protective conductor



The size of the PEN is determined in the same manner as a neutral conductor, i.e.:

- for copper single-phase circuits or sized  $\leq 16$  mm<sup>2</sup>, it must be the same size as the phase conductors
  - for copper three-phase circuits sized  $> 16$  mm<sup>2</sup>, it can be:
    - the same size as the phase conductors
    - smaller on the condition that:
      - the current likely to flow in the neutral during normal operation is less than the permissible current for the conductor
      - the power rating of single-phase loads does not exceed 10 % of the total rating.
- The conductor must be accessible to enable connections both in the factory and on site, as well as checks on the tightness of connections.

#### Practical guidelines to install PEN

According to standard IEC 61439-1 and 2, the practical guidelines for implementing the PEN are the following:

- at the entry to the assembly, the PEN connection must be next to the phase connections
  - within the assembly, the PEN does not need to be insulated from the exposed conductive parts (except on sites where there is a risk of fire or explosion)
  - the size of the conductor must be at least equal to that of the neutral
  - the size must remain constant throughout the main busbars
  - the change from a TNC to a TNS system must take place at a single point in the switchboard, via a marked neutral-disconnection bar that is accessible and can be dismantled to facilitate the impedance measurement of the fault loop
  - after the TNS creation point, it is forbidden to recreate a TNC system.
- The PE and the neutral must meet their specific requirements.

#### Linerger LGY PEN kit

> page G-39

## Designing horizontal busbars

## Linery LGE


## Electrical characteristics

Permissible current and selection of Linery LGE busbars  
Up to 4000 A


## Linery LGE section

| Type of bars    | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-----------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                 | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                 | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase  | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| Linery LGE 630  | 680                                        | 580     | 650     | 550     | 630     | 530     | 590     | 500     | 550     | 470     | 520     | ■       |
| Linery LGE 800  | 860                                        | 740     | 830     | 710     | 800     | 680     | 750     | 630     | 700     | 600     | 660     | ■       |
| Linery LGE 1000 | 1080                                       | 920     | 1040    | 884     | 1000    | 850     | 940     | 790     | 880     | 750     | 830     | ■       |
| Linery LGE 1250 | 1350                                       | 1150    | 1300    | 1100    | 1250    | 1050    | 1170    | 1000    | 1100    | 930     | 1020    | ■       |
| Linery LGE 1600 | 1730                                       | 1580    | 1690    | 1530    | 1650    | 1480    | 1550    | 1380    | 1450    | 1300    | 1350    | ■       |
| Linery LGE 2000 | 2200                                       | 1810    | 2100    | 1730    | 2000    | 1650    | 1900    | 1560    | 1810    | 1480    | 1720    | ■       |
| Linery LGE 2500 | 2640                                       | 2230    | 2540    | 2160    | 2440    | 2100    | 2310    | 2000    | 2240    | 1930    | 2120    | ■       |
| Linery LGE 3200 | 3400                                       | 3020    | 3300    | 2900    | 3200    | 2800    | 3040    | 2660    | 2890    | 2520    | 2750    | ■       |
| Linery LGE 4000 | 3800                                       | 3510    | 3710    | 3430    | 3620    | 3350    | 3450    | 3180    | 3280    | 3020    | 3120    | ■       |


■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.




Section 630 A.  
Cat. No. LVS04560.




Section 800 A.  
Cat. No. LVS04561.




Section 1000 A.  
Cat. No. LVS04562.




Section 1250 A.  
Cat. No. LVS04563.




Section 1600 A.  
Cat. No. LVS04564.




Section 2000 A.  
Cat. No. LVS04565.



Section 2500 A.  
Cat. No. LVS04566.



Section 3200 A.  
Cat. No. LVS04567.



Section 4000 A.  
Cat. No. LVS04568.



# Designing horizontal busbars

## Linery BS

### Electrical characteristics

#### Permissible current and selection of horizontal busbar

The goal is to optimise busbar size according to the installation and operating criteria.

#### Up to 1600 A

##### Linery BS bars, 5 mm thick

| Type of bars             | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|--------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                          | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                          | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase           | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linery BS bar, 60 x 5  | 890                                        | 840     | 850     | 790     | 800     | 750     | 760     | 700     | 710     | 650     | 660     | ■       |
| 1 Linery BS bar, 80 x 5  | 1130                                       | 1050    | 1080    | 990     | 1000    | 900     | 970     | 870     | 910     | 810     | 860     | ■       |
| 2 Linery BS bars, 60 x 5 | 1580                                       | 1420    | 1500    | 1350    | 1400    | 1250    | 1350    | 1180    | 1260    | 1090    | 1180    | ■       |
| 2 Linery BS bars, 80 x 5 | 2010                                       | 1820    | 1920    | 1720    | 1800    | 1600    | 1720    | 1510    | 1610    | 1390    | 1510    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

#### Up to 3200 A

##### Linery BS bars, 10 mm thick

| Type of bars               | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|----------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                            | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                            | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase             | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linery BS bar, 50 x 10   | 1330                                       | 1220    | 1260    | 1160    | 1200    | 1080    | 1130    | 1010    | 1060    | 940     | 990     | ■       |
| 1 Linery BS bar, 60 x 10   | 1550                                       | 1400    | 1470    | 1320    | 1400    | 1250    | 1320    | 1160    | 1240    | 1070    | 1160    | ■       |
| 1 Linery BS bar, 80 x 10   | 1990                                       | 1800    | 1890    | 1700    | 1800    | 1600    | 1700    | 1500    | 1600    | 1390    | 1500    | ■       |
| 2 Linery BS bars, 50 x 10  | 2270                                       | 2090    | 2160    | 1980    | 2050    | 1850    | 1930    | 1740    | 1810    | 1610    | 1690    | ■       |
| 2 Linery BS bars, 60 x 10  | 2550                                       | 2270    | 2420    | 2140    | 2300    | 2000    | 2170    | 1870    | 2030    | 1720    | 1900    | ■       |
| 2 Linery BS bars, 80 x 10  | 3110                                       | 2820    | 2970    | 2660    | 2820    | 2500    | 2660    | 2330    | 2500    | 2160    | 2330    | ■       |
| 2 Linery BS bars, 100 x 10 | 3650                                       | 3280    | 3490    | 3100    | 3300    | 2900    | 3130    | 2720    | 2950    | 2510    | 2750    | ■       |
| 2 Linery BS bars, 120 x 10 | 4160                                       | 3760    | 3960    | 3550    | 3760    | 3340    | 3560    | 3100    | 3340    | 2880    | 3120    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

#### Example:

Two 50 x 10 mm bars can be used for a 2160 A current with an IP ≤ 31 and an ambient temperature of 30 °C around the switchboard.

Where possible, use of 10 mm bars is worthwhile in terms of the In/Isc:

- gain in time during switchboard mounting given, where applicable, the lesser number of bars installed
- for short-circuits, the rigidity of the bars means fewer busbar supports.

#### Recommendation:

Use 5 mm bars for In ≤ 1600 A and low Icw values (40 kA rms).

Use 10 mm bars for In > 1600 A and medium to high Icw values (> 40 kA rms).

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

# Designing vertical busbars

## LinerGY LGY

### Electrical characteristics

#### Permissible current and selection of Linergy LGY busbars

The goal is to optimise busbar size according to the installation and operating criteria.

#### Up to 3200 A


#### LinerGY LGY section

| Type of bars                | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-----------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                             | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                             | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                             | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| LinerGY LGY 630             | 750                                        | 680     | 710     | 630     | 680     | 590     | 630     | 550     | 590     | 530     | 550     | ■       |
| LinerGY LGY 800             | 920                                        | 840     | 880     | 800     | 840     | 760     | 800     | 720     | 760     | 680     | 720     | ■       |
| LinerGY LGY 1000            | 1140                                       | 1040    | 1090    | 990     | 1040    | 950     | 990     | 900     | 950     | 850     | 900     | ■       |
| LinerGY LGY 1250            | 1410                                       | 1290    | 1350    | 1230    | 1290    | 1170    | 1230    | 1100    | 1170    | 1050    | 1100    | ■       |
| LinerGY LGY 1600            | 1800                                       | 1650    | 1720    | 1580    | 1650    | 1480    | 1580    | 1390    | 1480    | 1320    | 1390    | ■       |
| LinerGY LGY 2000 (2 x 1000) | 2200                                       | 2000    | 2100    | 1900    | 2000    | 1820    | 1900    | 1720    | 1820    | 1620    | 1720    | ■       |
| LinerGY LGY 2500 (2 x 1250) | 2740                                       | 2500    | 2620    | 2380    | 2500    | 2260    | 2380    | 2120    | 2260    | 2020    | 2120    | ■       |
| LinerGY LGY 3200 (2 x 1600) | 3480                                       | 3200    | 3340    | 3060    | 3200    | 2920    | 3060    | 2780    | 2920    | 2640    | 2780    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

#### Example:


A Linergy LGY channelled bar can be used for a 1650 A current with an IP ≤ 31 and an ambient temperature around the switchboard of 35 °C.



DD381233 eps




Section 630 A.  
Cat. No. LVS04502.



DD381234 eps




Section 800 A.  
Cat. No. LVS04503.



DD381235 eps




Section 1000 A.  
Cat. No. LVS04504.



DD385507 eps



Section 1250 A.  
Cat. No. LVS04505.



DD385508 eps



Section 1600 A.  
Cat. No. LVS04506.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

# Designing vertical busbars

## LinerGY LGYE

## Electrical characteristics


## Permissible current and selection of LinerGY LGYE busbars

## Up to 4000 A


## LinerGY LGYE section

| Type of bars      | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                   | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                   | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase    | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| LinerGY LGYE 630  | 680                                        | 580     | 650     | 550     | 630     | 530     | 590     | 500     | 550     | 470     | 520     | ■       |
| LinerGY LGYE 800  | 860                                        | 740     | 830     | 710     | 800     | 680     | 750     | 630     | 700     | 600     | 660     | ■       |
| LinerGY LGYE 1000 | 1080                                       | 920     | 1040    | 884     | 1000    | 850     | 940     | 790     | 880     | 750     | 830     | ■       |
| LinerGY LGYE 1250 | 1350                                       | 1150    | 1300    | 1100    | 1250    | 1050    | 1170    | 1000    | 1100    | 930     | 1020    | ■       |
| LinerGY LGYE 1600 | 1730                                       | 1580    | 1690    | 1530    | 1650    | 1480    | 1550    | 1380    | 1450    | 1300    | 1350    | ■       |
| LinerGY LGYE 2000 | 2200                                       | 1810    | 2100    | 1730    | 2000    | 1650    | 1900    | 1560    | 1810    | 1480    | 1720    | ■       |
| LinerGY LGYE 2500 | 2640                                       | 2230    | 2540    | 2160    | 2440    | 2100    | 2310    | 2000    | 2240    | 1930    | 2120    | ■       |
| LinerGY LGYE 3200 | 3400                                       | 3020    | 3300    | 2900    | 3200    | 2800    | 3040    | 2660    | 2890    | 2520    | 2750    | ■       |
| LinerGY LGYE 4000 | 3800                                       | 3510    | 3710    | 3430    | 3620    | 3350    | 3450    | 3180    | 3280    | 3020    | 3120    | ■       |


■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.




Section  
630 A.  
Cat. No. LVS04560.




Section 800 A.  
Cat. No. LVS04561.




Section 1000 A.  
Cat. No. LVS04562.




Section 1250 A.  
Cat. No. LVS04563.




Section 1600 A.  
Cat. No. LVS04564.




Section 2000 A.  
Cat. No. LVS04565.



Section 2500 A.  
Cat. No. LVS04566.



Section 3200 A.  
Cat. No. LVS04567.



Section 4000 A.  
Cat. No. LVS04568.

## Designing vertical busbars

## Linery BS

## Electrical characteristics

## Permissible current and selection of vertical busbar

The goal is to optimise busbar size according to the installation and operating criteria.

## Up to 1600 A

## Linery BS bars, 5 mm thick

| Type of bars              | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                           | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                           | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase            | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linergy BS bar, 60 x 5  | 890                                        | 840     | 850     | 790     | 800     | 750     | 760     | 700     | 710     | 650     | 660     | ■       |
| 1 Linergy BS bar, 80 x 5  | 1130                                       | 1050    | 1080    | 990     | 1000    | 900     | 970     | 870     | 910     | 810     | 860     | ■       |
| 2 Linergy BS bars, 60 x 5 | 1580                                       | 1420    | 1500    | 1350    | 1400    | 1250    | 1350    | 1180    | 1260    | 1090    | 1180    | ■       |
| 2 Linergy BS bars, 80 x 5 | 2010                                       | 1820    | 1920    | 1720    | 1800    | 1600    | 1720    | 1510    | 1610    | 1390    | 1510    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Up to 3200 A

## Linery BS bars, 10 mm thick

| Type of bars                  | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-------------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                               | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                               | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase                | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linergy BS bar, 50 x 10     | 1330                                       | 1220    | 1260    | 1160    | 1200    | 1080    | 1130    | 1010    | 1060    | 940     | 990     | ■       |
| 1 Linergy BS bar, 60 x 10     | 1550                                       | 1400    | 1470    | 1320    | 1400    | 1250    | 1320    | 1160    | 1240    | 1070    | 1160    | ■       |
| 1 Linergy BS bar, 80 x 10     | 1990                                       | 1800    | 1890    | 1700    | 1800    | 1600    | 1700    | 1500    | 1600    | 1390    | 1500    | ■       |
| 1 Linergy BS bar, 100 x 10    | 2370                                       | 2150    | 2260    | 2030    | 2150    | 1900    | 2030    | 1780    | 1900    | 1650    | 1780    | ■       |
| 2 Linergy BS bars, 50 x 10    | 2270                                       | 2090    | 2160    | 1980    | 2050    | 1850    | 1930    | 1740    | 1810    | 1610    | 1690    | ■       |
| 2 Linergy BS bars, 60 x 10    | 2550                                       | 2270    | 2420    | 2140    | 2300    | 2000    | 2170    | 1870    | 2030    | 1720    | 1900    | ■       |
| 2 Linergy BS bars, 80 x 10    | 3110                                       | 2820    | 2970    | 2660    | 2820    | 2500    | 2660    | 2330    | 2500    | 2160    | 2330    | ■       |
| 2 x 1 Linergy BS bar, 80 x 10 | 3540                                       | 3200    | 3370    | 3020    | 3200    | 2820    | 3020    | 2650    | 2840    | 2450    | 2650    | ■       |
| 2 Linergy BS bars, 100 x 10   | 3650                                       | 3280    | 3490    | 3100    | 3300    | 2900    | 3130    | 2720    | 2950    | 2510    | 2750    | ■       |
| 2 Linergy BS bars, 120 x 10   | 4160                                       | 3760    | 3960    | 3550    | 3760    | 3340    | 3560    | 3100    | 3340    | 2880    | 3120    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Example

Two 80 x 10 mm bars can be used for a 2820 A current with an IP ≤ 31 and an ambient temperature of 35°C around the switchboard.

Two 80 x 10 mm bars installed separately in two busbar compartments can be used for a 3200 A current with an IP ≤ 31 and an ambient temperature of 35°C around the switchboard.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

# Designing rear busbars

## Linery LGYE, Linergy BS

### Electrical characteristics

#### Permissible current and selection of vertical busbar

The goal is to optimise busbar size according to the installation and operating criteria.

#### Up to 1600 A

##### Linery LGY section

| Type of bars    | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-----------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                 | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                 | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                 | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| Linery LGY 630  | 750                                        | 680     | 710     | 630     | 680     | 590     | 630     | 550     | 590     | 530     | 550     | ■       |
| Linery LGY 800  | 920                                        | 840     | 880     | 800     | 840     | 760     | 800     | 720     | 760     | 680     | 720     | ■       |
| Linery LGY 1000 | 1140                                       | 1040    | 1090    | 990     | 1040    | 950     | 990     | 900     | 950     | 850     | 900     | ■       |
| Linery LGY 1250 | 1410                                       | 1290    | 1350    | 1230    | 1290    | 1170    | 1230    | 1100    | 1170    | 1050    | 1100    | ■       |
| Linery LGY 1600 | 1800                                       | 1650    | 1720    | 1580    | 1650    | 1480    | 1580    | 1390    | 1480    | 1320    | 1390    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

#### Up to 1600 A

##### Linery BS bars, 5 mm thick

| Type of bars              | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                           | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                           | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase            | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linergy BS bar, 60 x 5  | 890                                        | 840     | 850     | 790     | 800     | 750     | 760     | 700     | 710     | 650     | 660     | ■       |
| 1 Linergy BS bar, 80 x 5  | 1130                                       | 1050    | 1080    | 990     | 1000    | 900     | 970     | 870     | 910     | 810     | 860     | ■       |
| 2 Linergy BS bars, 60 x 5 | 1580                                       | 1420    | 1500    | 1350    | 1400    | 1250    | 1350    | 1180    | 1260    | 1090    | 1180    | ■       |
| 2 Linergy BS bars, 80 x 5 | 2010                                       | 1820    | 1920    | 1720    | 1800    | 1600    | 1720    | 1510    | 1610    | 1390    | 1510    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

#### Up to 3200 A

##### Linery BS bars, 10 mm thick

| Type of bars               | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|----------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                            | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                            | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase             | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linergy BS bar, 50 x 10  | 1330                                       | 1220    | 1260    | 1160    | 1200    | 1080    | 1130    | 1010    | 1060    | 940     | 990     | ■       |
| 1 Linergy BS bar, 60 x 10  | 1550                                       | 1400    | 1470    | 1320    | 1400    | 1250    | 1320    | 1160    | 1240    | 1070    | 1160    | ■       |
| 1 Linergy BS bar, 80 x 10  | 1990                                       | 1800    | 1890    | 1700    | 1800    | 1600    | 1700    | 1500    | 1600    | 1390    | 1500    | ■       |
| 2 Linergy BS bars, 80 x 10 | 2270                                       | 2090    | 2160    | 1980    | 2050    | 1850    | 1930    | 1740    | 1810    | 1610    | 1690    | ■       |
| 2 Linergy BS bars, 60 x 10 | 2550                                       | 2270    | 2420    | 2140    | 2300    | 2000    | 2170    | 1870    | 2030    | 1720    | 1900    | ■       |
| 2 Linergy BS bars, 80 x 10 | 3110                                       | 2820    | 2970    | 2660    | 2820    | 2500    | 2660    | 2330    | 2500    | 2160    | 2330    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

## Designing connections between a device and busbars

## Prefabricated connections for ComPacT NS630b to NS1600

## Electrical characteristics

## ComPacT NS630b to NS1600

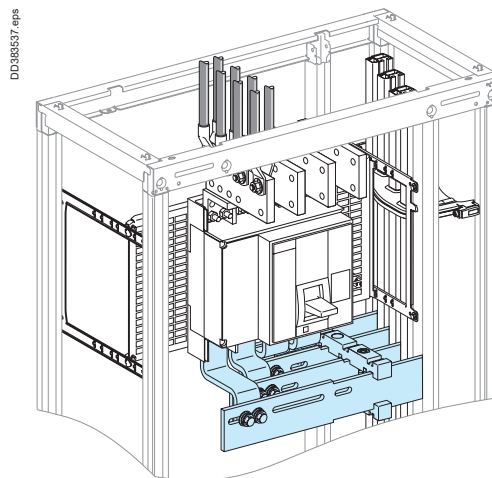
## Vertical mounting

Front or rear connection

Top or bottom incoming

Vertical busbars on the left or right

Linergy LGY busbars



Using the data below, it is possible to determine the permissible current for a prefabricated connection between a vertical ComPacT NS630b/NS1600, fixed or withdrawable, and Linergy LGY busbars depending on the ambient temperature around the switchboard and the IP value.

## Fixed

## Prefabricated connection

| Device and cat. no. |                      | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------|----------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                     |                      | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                     |                      | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                     |                      | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| NS630b              | 3P cat. no. LVS04485 | 630                                        | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | ■       |
|                     | 4P cat. no. LVS04486 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS800               | 3P cat. no. LVS04485 | 800                                        | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | ■       |
|                     | 4P cat. no. LVS04486 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1000              | 3P cat. no. LVS04485 | 1000                                       | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | ■       |
|                     | 4P cat. no. LVS04486 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1250              | 3P cat. no. LVS04485 | 1250                                       | 1250    | 1250    | 1250    | 1250    | 1250    | 1250    | 1200    | 1250    | 1150    | 1200    | ■       |
|                     | 4P cat. no. LVS04486 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1600              | 3P cat. no. LVS04487 | 1600                                       | 1550    | 1600    | 1500    | 1550    | 1450    | 1500    | 1400    | 1450    | 1350    | 1400    | ■       |
|                     | 4P cat. no. LVS04488 |                                            |         |         |         |         |         |         |         |         |         |         |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Withdrawable

## Prefabricated connection

| Device and cat. no. |                      | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------|----------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                     |                      | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                     |                      | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                     |                      | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| NS630b              | 3P cat. no. LVS04477 | 630                                        | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | ■       |
|                     | 4P cat. no. LVS04478 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS800               | 3P cat. no. LVS04477 | 800                                        | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | ■       |
|                     | 4P cat. no. LVS04478 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1000              | 3P cat. no. LVS04477 | 1000                                       | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | ■       |
|                     | 4P cat. no. LVS04478 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1250              | 3P cat. no. LVS04477 | 1250                                       | 1250    | 1250    | 1250    | 1250    | 1250    | 1250    | 1200    | 1250    | 1150    | 1200    |         |
|                     | 4P cat. no. LVS04478 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1600              | 3P cat. no. LVS04491 | 1560                                       | 1480    | 1520    | 1430    | 1480    | 1380    | 1430    | 1330    | 1380    | 1280    | 1330    | ■       |
|                     | 4P cat. no. LVS04492 |                                            |         |         |         |         |         |         |         |         |         |         |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Example:

For a fixed ComPacT NS1600, 4P, where the ambient temperature around the switchboard is 35 °C and the IP > 31:  
the maximum permissible current for the prefabricated connection (LVS04488) is 1450 A.

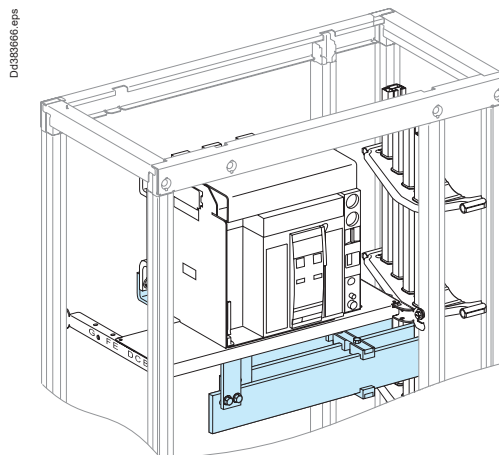
## Designing connections between a device and busbars

## Prefabricated connections for MasterPacT 06-16

## Electrical characteristics

MasterPacT MTZ106 to 16  
MasterPacT MTZ1 06 to 16  
Vertical mounting

Front or rear connection  
Top or bottom incoming  
Vertical busbars on the left or right  
Linergy LGY busbars



Using the data below, it is possible to determine the permissible current for a prefabricated connection between a vertical MasterPacT MTZ1 06/NT16, fixed or drawout, and Linergy LGY busbars depending on the ambient temperature around the switchboard and the IP value.

## Fixed

## Prefabricated connection

| Device and cat. no. |                                              | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------|----------------------------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                     |                                              | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                     |                                              | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                     |                                              | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| NT06 & MTZ1         | 3P cat. no. LVS04475<br>4P cat. no. LVS04476 | 630                                        | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | ■       |
| NT08 & MTZ1         | 3P cat. no. LVS04475<br>4P cat. no. LVS04476 | 800                                        | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | ■       |
| NT10 & MTZ1         | 3P cat. no. LVS04475<br>4P cat. no. LVS04476 | 1000                                       | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | ■       |
| NT12 & MTZ1         | 3P cat. no. LVS04475<br>4P cat. no. LVS04476 | 1250                                       | 1250    | 1250    | 1250    | 1250    | 1250    | 1250    | 1200    | 1250    | 1150    | 1200    | ■       |
| NT16 & MTZ1         | 3P cat. no. LVS04489<br>4P cat. no. LVS04490 | 1600                                       | 1570    | 1600    | 1520    | 1570    | 1470    | 1520    | 1420    | 1470    | 1370    | 1420    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Withdrawable

## Prefabricated connection

| Device and cat. no. |                                              | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------|----------------------------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                     |                                              | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                     |                                              | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                     |                                              | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| NT06 & MTZ1         | 3P cat. no. LVS04477<br>4P cat. no. LVS04478 | 630                                        | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | ■       |
| NT08 & MTZ1         | 3P cat. no. LVS04477<br>4P cat. no. LVS04478 | 800                                        | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | ■       |
| NT10 & MTZ1         | 3P cat. no. LVS04477<br>4P cat. no. LVS04478 | 1000                                       | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | ■       |
| NT12 & MTZ1         | 3P cat. no. LVS04477<br>4P cat. no. LVS04478 | 1250                                       | 1250    | 1250    | 1250    | 1250    | 1250    | 1250    | 1200    | 1250    | 1150    | 1200    | ■       |
| NT16 & MTZ1         | 3P cat. no. LVS04491<br>4P cat. no. LVS04492 | 1560                                       | 1480    | 1520    | 1430    | 1480    | 1380    | 1430    | 1330    | 1380    | 1280    | 1330    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Example:

For a drawout MasterPacT MTZ1 16, 4P, where the ambient temperature around the switchboard is 35°C and the IP > 31: the maximum permissible current for the prefabricated connection (LVS04492) is 1380 A.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.



# Designing connections between a device and busbars

## Prefabricated connections for ComPacT NS630b to NS1000

### Electrical characteristics

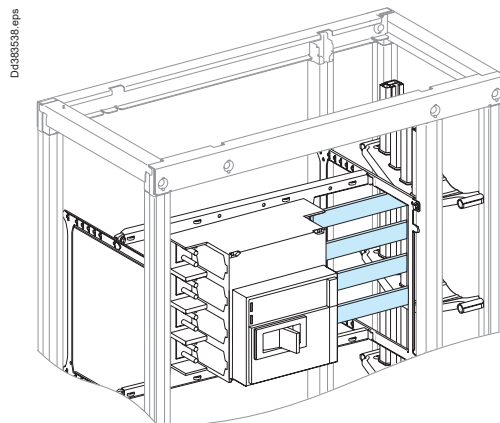
#### ComPacT NS630b à NS1000

##### Horizontal mounting

Front or rear connection

Left or right incoming

Linery LGY vertical busbars



Using the data below, it is possible to determine the permissible current for a prefabricated connection between a horizontal ComPacT NS630b/NS1600, fixed or withdrawable, and Linery LGY busbars depending on the ambient temperature around the switchboard and the IP value.

#### Fixed

##### Prefabricated connection

| Device and cat. no. |                             | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------|-----------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                     |                             | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                     |                             | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                     |                             | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| NS630b              | 3P cat. no. <b>LVS04473</b> | 630                                        | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | ■       |
|                     | 4P cat. no. <b>LVS04474</b> |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS800               | 3P cat. no. <b>LVS04473</b> | 800                                        | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | ■       |
|                     | 4P cat. no. <b>LVS04474</b> |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1000              | 3P cat. no. <b>LVS04473</b> | 1000                                       | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | ■       |
|                     | 4P cat. no. <b>LVS04474</b> |                                            |         |         |         |         |         |         |         |         |         |         |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

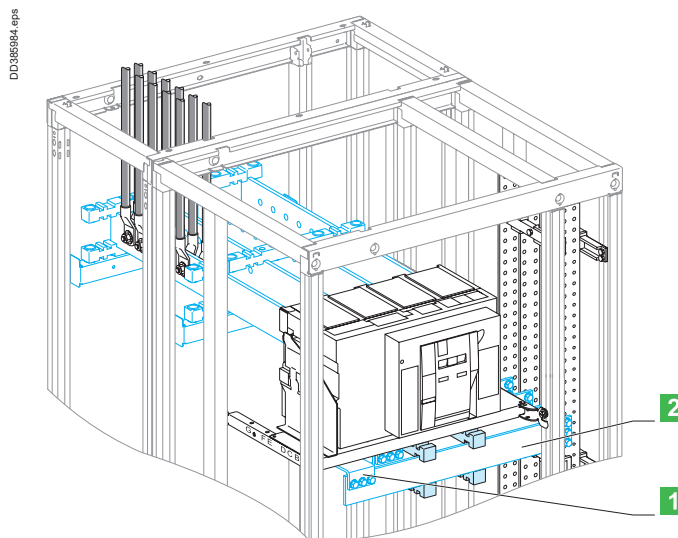
## Designing connections between a device and busbars

Fixed MasterPacT 08-16

## Electrical characteristics

MasterPacT MTZ208 to 16  
MasterPacT MTZ2 08 to 16  
Fixed

Vertical busbars on the left or right  
Linergy LGY, BS busbars  
Connections drawings supplied by  
Schneider Electric



- 1 Liaison  
2 Horizontal link.

Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making the connections to busbars for a vertical, fixed MasterPacT NW08/16, front or rear connection, taking into account the ambient temperature around the switchboard and the IP value.

## Connection

Flat bars, 5 mm thick

| Device      |                | Permissible current (A)                        |           |           |           |           |           |           |           |           |           |           |         |
|-------------|----------------|------------------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|
|             |                | Ambient temperature around the switchboard (1) |           |           |           |           |           |           |           |           |           |           |         |
|             |                | 25 °C                                          |           | 30 °C     |           | 35 °C     |           | 40 °C     |           | 45 °C     |           | 50 °C     |         |
|             |                | IP ≤ 31                                        | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 80 x 5                                      | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 800                                            | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       |         |
| NW10 & MTZ2 | Size per phase | 1b 80 x 5                                      | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 1000                                           | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      |         |
| NW12 & MTZ2 | Size per phase | 2b 80 x 5                                      | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1250                                           | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      |         |
| NW16 & MTZ2 | Size per phase | 2b 80 x 5                                      | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1600                                           | 1600      | 1600      | 1570      | 1600      | 1520      | 1570      | 1470      | 1520      | 1420      | 1470      |         |

## Horizontal link

Flat bars, 5 mm thick

| Device      |                | Permissible current (A)                    |           |           |           |           |           |           |           |           |           |           |         |
|-------------|----------------|--------------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|
|             |                | Ambient temperature around the switchboard |           |           |           |           |           |           |           |           |           |           |         |
|             |                | 25 °C                                      |           | 30 °C     |           | 35 °C     |           | 40 °C     |           | 45 °C     |           | 50 °C     |         |
|             |                | IP ≤ 31                                    | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 80 x 5                                  | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 800                                        | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       |         |
| NW10 & MTZ2 | Size per phase | 1b 80 x 5                                  | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 1000                                       | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      |         |
| NW12 & MTZ2 | Size per phase | 2b 80 x 5                                  | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1250                                       | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      |         |
| NW16 & MTZ2 | Size per phase | 2b 80 x 5                                  | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1600                                       | 1600      | 1600      | 1570      | 1600      | 1520      | 1570      | 1470      | 1520      | 1420      | 1470      |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

(1) In the case of a door mounted at the rear of cubicle, add 10 °C.

Note: the values indicated above have been validated for PrismaSeT P Active switchboards.

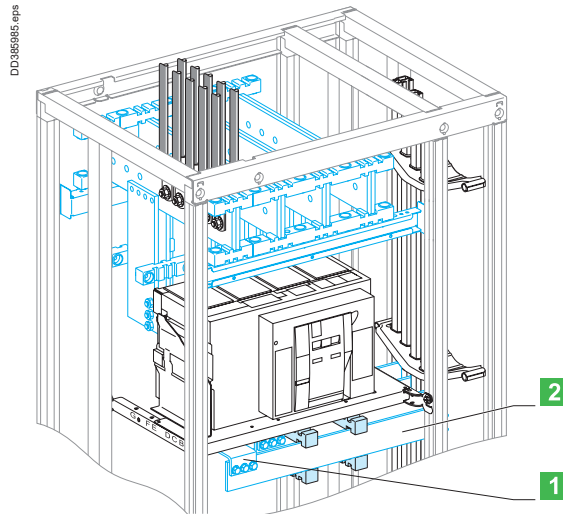
## Designing connections between a device and busbars

Fixed MasterPacT 08-32

## Electrical characteristics

MasterPact MTZ208 to 32  
MasterPacT MTZ2 08 to 32  
Fixed

Vertical busbars on the left or right  
Linergy LGE, LGY, BS busbars  
Connections drawings supplied by  
Schneider Electric



1 Connection.

2 Horizontal link.

Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making the connections to busbars for a vertical, fixed MasterPact MTZ2 08/32, front or rear connection, taking into account the ambient temperature around the switchboard and the IP value.

## Connection

## Flat bars, 10 mm thick

| Device      |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|-------------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|             |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|             |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|             |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        |         |
| NW10 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       |         |
| NW12 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1250                                       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       |         |
| NW16 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1600                                       | 1600       | 1600       | 1570       | 1600       | 1520       | 1570       | 1470       | 1520       | 1420       | 1470       |         |
| NW20 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2000                                       | 2000       | 2000       | 2000       | 2000       | 2000       | 2000       | 1950       | 2000       | 1900       | 1950       |         |
| NW25 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2500                                       | 2500       | 2500       | 2500       | 2500       | 2460       | 2500       | 2380       | 2500       | 2300       | 2460       |         |
| NW32 & MTZ2 | Size per phase | 3b 80 x 10                                 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | ■       |
|             | I (A)          | 3200                                       | 3000       | 3170       | 2910       | 3080       | 2820       | 3000       | 2730       | 2910       | 2630       | 2820       |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Horizontal link

## Flat bars, 10 mm thick

| Device      |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|-------------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|             |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|             |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|             |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 60 x 10                                 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | ■       |
|             | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        |         |
| NW10 & MTZ2 | Size per phase | 1b 60 x 10                                 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | ■       |
|             | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       |         |
| NW12 & MTZ2 | Size per phase | 1b 60 x 10                                 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | ■       |
|             | I (A)          | 1250                                       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       |         |
| NW16 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1600                                       | 1600       | 1600       | 1570       | 1600       | 1520       | 1570       | 1470       | 1520       | 1420       | 1470       |         |
| NW20 & MTZ2 | Size per phase | 2b 60 x 10                                 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | ■       |
|             | I (A)          | 2000                                       | 2000       | 2000       | 2000       | 2000       | 2000       | 2000       | 1950       | 2000       | 1900       | 1950       |         |
| NW25 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2500                                       | 2500       | 2500       | 2500       | 2500       | 2460       | 2500       | 2380       | 2500       | 2300       | 2460       |         |
| NW32 & MTZ2 | Size per phase | 2b 100x10                                  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | ■       |
|             | I (A)          | 3200                                       | 3000       | 3170       | 2910       | 3080       | 2820       | 3000       | 2730       | 2910       | 2630       | 2820       |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

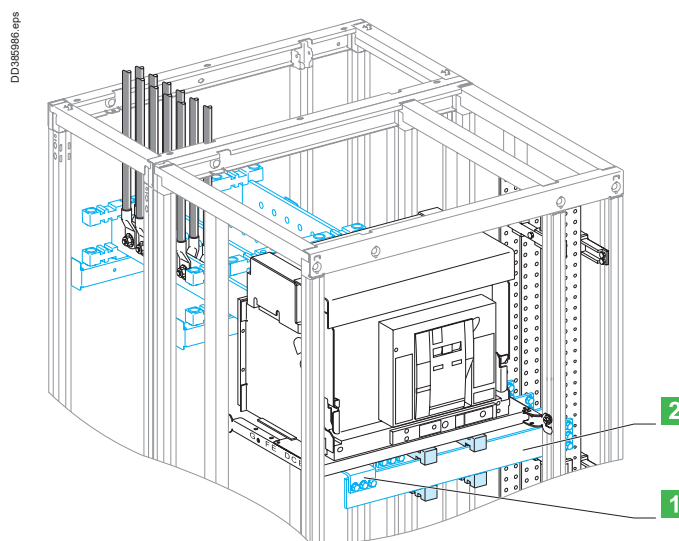
## Designing connections between a device and busbars

Drawout MasterPacT 08-16

## Electrical characteristics

MasterPacT MTZ208 to 16  
MasterPacT MTZ2 08 to 16  
Drawout

Vertical busbars on the left or right  
Linergy LGY, BS busbars  
Connections drawings supplied by  
Schneider Electric



1 Connection.

2 Horizontal link.

Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making the connections to busbars for a vertical, drawout MasterPacT MTZ2 08/16, front or rear connection, taking into account the ambient temperature around the switchboard and the IP value.

## Connection

Flat bars, 5 mm thick

| Device      |                | Permissible current (A)                        |           |           |           |           |           |           |           |           |           |           |         |
|-------------|----------------|------------------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|
|             |                | Ambient temperature around the switchboard (1) |           |           |           |           |           |           |           |           |           |           |         |
|             |                | 25 °C                                          |           | 30 °C     |           | 35 °C     |           | 40 °C     |           | 45 °C     |           | 50 °C     |         |
|             |                | IP ≤ 31                                        | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 80 x 5                                      | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 800                                            | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       |         |
| NW10 & MTZ2 | Size per phase | 1b 80 x 5                                      | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 1000                                           | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      |         |
| NW12 & MTZ2 | Size per phase | 2b 80 x 5                                      | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1250                                           | 1250      | 1250      | 1250      | 1250      | 1230      | 1250      | 1200      | 1230      | 1160      | 1200      |         |
| NW16 & MTZ2 | Size per phase | 2b 80 x 5                                      | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1560                                           | 1480      | 1520      | 1430      | 1480      | 1380      | 1430      | 1330      | 1380      | 1280      | 1330      |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Horizontal link

Flat bars, 5 mm thick

| Device      |                | Permissible current (A)                    |           |           |           |           |           |           |           |           |           |           |         |
|-------------|----------------|--------------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|
|             |                | Ambient temperature around the switchboard |           |           |           |           |           |           |           |           |           |           |         |
|             |                | 25 °C                                      |           | 30 °C     |           | 35 °C     |           | 40 °C     |           | 45 °C     |           | 50 °C     |         |
|             |                | IP ≤ 31                                    | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 80 x 5                                  | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 800                                        | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       |         |
| NW10 & MTZ2 | Size per phase | 1b 80 x 5                                  | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 1000                                       | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      |         |
| NW12 & MTZ2 | Size per phase | 2b 80 x 5                                  | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1250                                       | 1250      | 1250      | 1250      | 1250      | 1230      | 1250      | 1200      | 1230      | 1160      | 1200      |         |
| NW16 & MTZ2 | Size per phase | 2b 80 x 5                                  | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1560                                       | 1480      | 1520      | 1430      | 1480      | 1380      | 1430      | 1330      | 1380      | 1280      | 1330      |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

(1) In the case of a door mounted at the rear of cubicle, add 10 °C.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

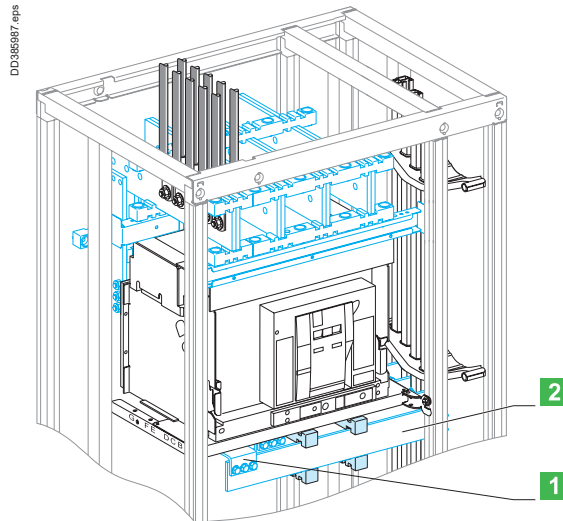
## Designing connections between a device and busbars

Drawout MasterPacT 08-32

## Electrical characteristics

MasterPacT MTZ208 to 32  
MasterPacT MTZ2 08 to 32  
Drawout

Vertical busbars on the left or right  
Linergy LGE, LGY, BS busbars  
Connections drawings supplied by  
Schneider Electric



1 Connection.

2 Horizontal link.

Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making the connections to busbars for a vertical, drawout MasterPacT MTZ2 08/32, front or rear connection, taking into account the ambient temperature around the switchboard and the IP value.

## Connection

Flat bars, 10 mm thick

| Device      |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|-------------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|             |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|             |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|             |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        |         |
| NW10 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       |         |
| NW12 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1250                                       | 1250       | 1250       | 1210       | 1250       | 1180       | 1210       | 1140       | 1180       | 1100       | 1140       |         |
| NW16 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1560                                       | 1480       | 1520       | 1430       | 1480       | 1380       | 1430       | 1330       | 1380       | 1280       | 1330       |         |
| NW20 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2000                                       | 2000       | 2000       | 1950       | 2000       | 1900       | 1950       | 1830       | 1900       | 1760       | 1830       |         |
| NW25 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2470                                       | 2280       | 2410       | 2210       | 2350       | 2140       | 2280       | 2070       | 2210       | 2000       | 2140       |         |
| NW32 & MTZ2 | Size per phase | 3b 80 x 10                                 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | ■       |
|             | I (A)          | 2960                                       | 2730       | 2890       | 2630       | 2820       | 2530       | 2730       | 2450       | 2630       | 2370       | 2530       |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Horizontal link

Flat bars, 10 mm thick

| Device      |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|-------------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|             |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|             |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|             |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 60 x 10                                 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | ■       |
|             | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        |         |
| NW10 & MTZ2 | Size per phase | 1b 60 x 10                                 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | ■       |
|             | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       |         |
| NW12 & MTZ2 | Size per phase | 1b 60 x 10                                 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | ■       |
|             | I (A)          | 1250                                       | 1250       | 1250       | 1210       | 1250       | 1180       | 1210       | 1140       | 1180       | 1100       | 1140       |         |
| NW16 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1560                                       | 1480       | 1520       | 1430       | 1480       | 1380       | 1430       | 1330       | 1380       | 1280       | 1330       |         |
| NW20 & MTZ2 | Size per phase | 2b 60 x 10                                 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | ■       |
|             | I (A)          | 2000                                       | 2000       | 2000       | 1950       | 2000       | 1900       | 1950       | 1830       | 1900       | 1760       | 1830       |         |
| NW25 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2470                                       | 2280       | 2410       | 2210       | 2350       | 2140       | 2280       | 2070       | 2210       | 2000       | 2140       |         |
| NW32 & MTZ2 | Size per phase | 2b 100x10                                  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | ■       |
|             | I (A)          | 2960                                       | 2730       | 2890       | 2630       | 2820       | 2530       | 2730       | 2450       | 2630       | 2370       | 2530       |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

Note: the values indicated above have been validated for PrismaSeT P Active switchboards.

## Designing connections between a device and busbars

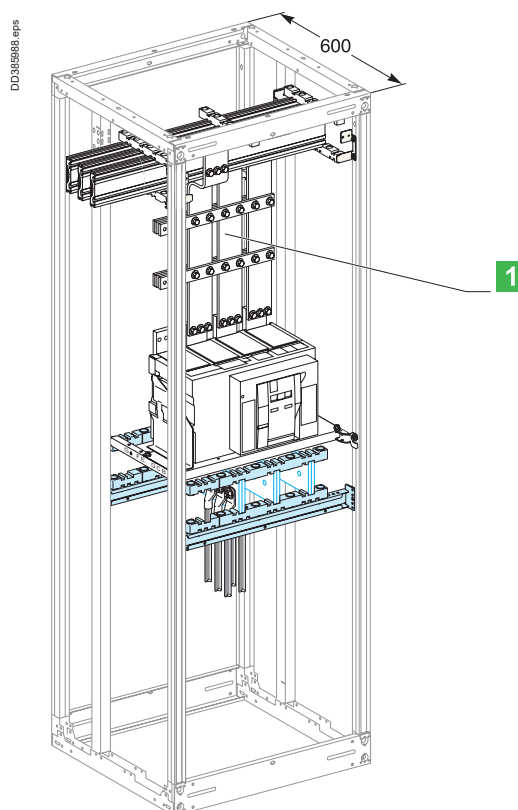
## Dedicated cubicle

Fixed MasterPacT 08-32

## Electrical characteristics

MasterPact MTZ208 to 32  
MasterPact MTZ2 08 to 32  
Fixed

Dedicated cubicle  
Linergy LGYE, BS busbars  
Connections drawings supplied by  
Schneider Electric



## Connection

Flat bars, 10 mm thick

| Device      |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|-------------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|             |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|             |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|             |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        |         |
| NW10 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       |         |
| NW12 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1250                                       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       |         |
| NW16 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1600                                       | 1600       | 1600       | 1570       | 1600       | 1520       | 1570       | 1470       | 1520       | 1420       | 1470       |         |
| NW20 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2000                                       | 2000       | 2000       | 2000       | 2000       | 2000       | 2000       | 1950       | 2000       | 1900       | 1950       |         |
| NW25 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2500                                       | 2500       | 2500       | 2500       | 2500       | 2460       | 2500       | 2380       | 2500       | 2300       | 2460       |         |
| NW32 & MTZ2 | Size per phase | 3b 80 x 10                                 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | ■       |
|             | I (A)          | 3200                                       | 3000       | 3170       | 2910       | 3080       | 2820       | 3000       | 2730       | 2910       | 2630       | 2820       |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

**Note:** contact Schneider Electric for 4000 A dedicated cubicle

# Designing connections between a device and busbars

## Dedicated cubicle

Drawout MasterPact 08-32

Electrical characteristics

MasterPact MTZ2 08 to 32

MasterPact MTZ2 08 to 32

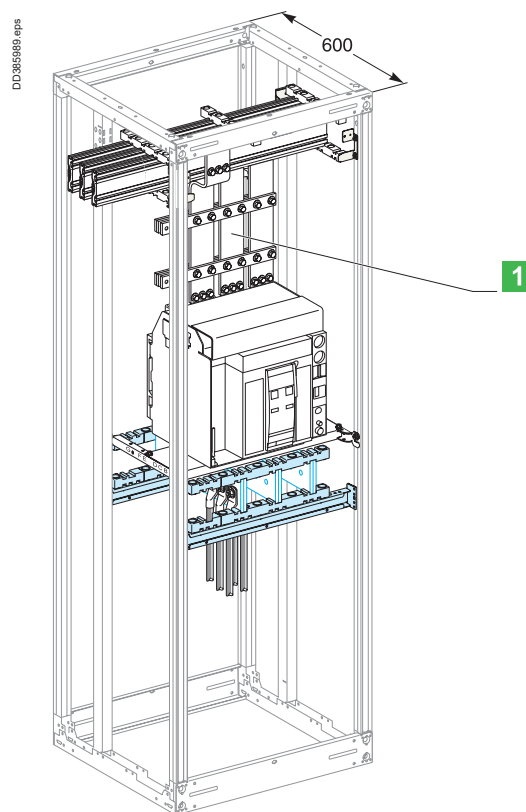
Drawout

Dedicated cubicle

Linergy LGYE, BS busbars

Connections drawings supplied by

Schneider Electric



## Connection

Flat bars, 10 mm thick

| Device      |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|-------------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|             |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|             |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|             |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        |         |
| NW10 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       |         |
| NW12 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1250                                       | 1250       | 1250       | 1210       | 1250       | 1180       | 1210       | 1140       | 1180       | 1100       | 1140       |         |
| NW16 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1560                                       | 1480       | 1520       | 1430       | 1480       | 1380       | 1430       | 1330       | 1380       | 1280       | 1330       |         |
| NW20 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2000                                       | 2000       | 2000       | 1950       | 2000       | 1900       | 1950       | 1830       | 1900       | 1760       | 1830       |         |
| NW25 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2470                                       | 2280       | 2410       | 2210       | 2350       | 2140       | 2280       | 2070       | 2210       | 2000       | 2140       |         |
| NW32 & MTZ2 | Size per phase | 3b 80 x 10                                 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | ■       |
|             | I (A)          | 2960                                       | 2730       | 2890       | 2630       | 2820       | 2530       | 2730       | 2450       | 2630       | 2370       | 2530       |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

**Note:** contact Schneider Electric for 4000 A dedicated cubicle



## Designing horizontal busbars

## Linery LGYE


## Electrical characteristics

Permissible current and selection of Linery LGYE busbars  
Up to 4000 A


## Linery LGYE section

| Type of bars     | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                  | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                  | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase   | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| Linery LGYE 630  | 680                                        | 580     | 650     | 550     | 630     | 530     | 590     | 500     | 550     | 470     | 520     | ■       |
| Linery LGYE 800  | 860                                        | 740     | 830     | 710     | 800     | 680     | 750     | 630     | 700     | 600     | 660     | ■       |
| Linery LGYE 1000 | 1080                                       | 920     | 1040    | 884     | 1000    | 850     | 940     | 790     | 880     | 750     | 830     | ■       |
| Linery LGYE 1250 | 1350                                       | 1150    | 1300    | 1100    | 1250    | 1050    | 1170    | 1000    | 1100    | 930     | 1020    | ■       |
| Linery LGYE 1600 | 1730                                       | 1580    | 1690    | 1530    | 1650    | 1480    | 1550    | 1380    | 1450    | 1300    | 1350    | ■       |
| Linery LGYE 2000 | 2200                                       | 1810    | 2100    | 1730    | 2000    | 1650    | 1900    | 1560    | 1810    | 1480    | 1720    | ■       |
| Linery LGYE 2500 | 2640                                       | 2230    | 2540    | 2160    | 2440    | 2100    | 2310    | 2000    | 2240    | 1930    | 2120    | ■       |
| Linery LGYE 3200 | 3400                                       | 3020    | 3300    | 2900    | 3200    | 2800    | 3040    | 2660    | 2890    | 2520    | 2750    | ■       |
| Linery LGYE 4000 | 3800                                       | 3510    | 3710    | 3430    | 3620    | 3350    | 3450    | 3180    | 3280    | 3020    | 3120    | ■       |


■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.




Section 630 A.  
Cat. No. LVS04560.




Section 800 A.  
Cat. No. LVS04561.




Section 1000 A.  
Cat. No. LVS04562.




Section 1250 A.  
Cat. No. LVS04563.




Section 1600 A.  
Cat. No. LVS04564.




Section 2000 A.  
Cat. No. LVS04565.



Section 2500 A.  
Cat. No. LVS04566.



Section 3200 A.  
Cat. No. LVS04567.



Section 4000 A.  
Cat. No. LVS04568.

## Designing horizontal busbars

## Linergy BS

## Electrical characteristics

## Permissible current and selection of horizontal busbar

The goal is to optimise busbar size according to the installation and operating criteria.

## Up to 1600 A

## Linergy BS bars, 5 mm thick

| Type of bars              | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                           | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                           | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase            | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linergy BS bar, 60 x 5  | 890                                        | 840     | 850     | 790     | 800     | 750     | 760     | 700     | 710     | 650     | 660     | ■       |
| 1 Linergy BS bar, 80 x 5  | 1130                                       | 1050    | 1080    | 990     | 1000    | 900     | 970     | 870     | 910     | 810     | 860     | ■       |
| 2 Linergy BS bars, 60 x 5 | 1580                                       | 1420    | 1500    | 1350    | 1400    | 1250    | 1350    | 1180    | 1260    | 1090    | 1180    | ■       |
| 2 Linergy BS bars, 80 x 5 | 2010                                       | 1820    | 1920    | 1720    | 1800    | 1600    | 1720    | 1510    | 1610    | 1390    | 1510    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Up to 3200 A

## Linergy BS bars, 10 mm thick

| Type of bars                | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-----------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                             | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                             | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase              | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linergy BS bar, 50 x 10   | 1330                                       | 1220    | 1260    | 1160    | 1200    | 1080    | 1130    | 1010    | 1060    | 940     | 990     | ■       |
| 1 Linergy BS bar, 60 x 10   | 1550                                       | 1400    | 1470    | 1320    | 1400    | 1250    | 1320    | 1160    | 1240    | 1070    | 1160    | ■       |
| 1 Linergy BS bar, 80 x 10   | 1990                                       | 1800    | 1890    | 1700    | 1800    | 1600    | 1700    | 1500    | 1600    | 1390    | 1500    | ■       |
| 2 Linergy BS bars, 50 x 10  | 2270                                       | 2090    | 2160    | 1980    | 2050    | 1850    | 1930    | 1740    | 1810    | 1610    | 1690    | ■       |
| 2 Linergy BS bars, 60 x 10  | 2550                                       | 2270    | 2420    | 2140    | 2300    | 2000    | 2170    | 1870    | 2030    | 1720    | 1900    | ■       |
| 2 Linergy BS bars, 80 x 10  | 3110                                       | 2820    | 2970    | 2660    | 2820    | 2500    | 2660    | 2330    | 2500    | 2160    | 2330    | ■       |
| 2 Linergy BS bars, 100 x 10 | 3650                                       | 3280    | 3490    | 3100    | 3300    | 2900    | 3130    | 2720    | 2950    | 2510    | 2750    | ■       |
| 2 Linergy BS bars, 120 x 10 | 4160                                       | 3760    | 3960    | 3550    | 3760    | 3340    | 3560    | 3100    | 3340    | 2880    | 3120    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Example:

Two 50 x 10 mm bars can be used for a 2160 A current with an IP ≤ 31 and an ambient temperature of 30 °C around the switchboard.

Where possible, use of 10 mm bars is worthwhile in terms of the In/Isc:

- gain in time during switchboard mounting given, where applicable, the lesser number of bars installed
- for short-circuits, the rigidity of the bars means fewer busbar supports.

## Recommendation:

Use 5 mm bars for In ≤ 1600 A and low Icw values (40 kA rms).

Use 10 mm bars for In > 1600 A and medium to high Icw values (> 40 kA rms).

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

# Designing vertical busbars

## LinerGY LGY

### Electrical characteristics

#### Permissible current and selection of Linergy LGY busbars

The goal is to optimise busbar size according to the installation and operating criteria.

#### Up to 3200 A


#### LinerGY LGY section

| Type of bars                | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-----------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                             | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                             | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                             | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| LinerGY LGY 630             | 750                                        | 680     | 710     | 630     | 680     | 590     | 630     | 550     | 590     | 530     | 550     | ■       |
| LinerGY LGY 800             | 920                                        | 840     | 880     | 800     | 840     | 760     | 800     | 720     | 760     | 680     | 720     | ■       |
| LinerGY LGY 1000            | 1140                                       | 1040    | 1090    | 990     | 1040    | 950     | 990     | 900     | 950     | 850     | 900     | ■       |
| LinerGY LGY 1250            | 1410                                       | 1290    | 1350    | 1230    | 1290    | 1170    | 1230    | 1100    | 1170    | 1050    | 1100    | ■       |
| LinerGY LGY 1600            | 1800                                       | 1650    | 1720    | 1580    | 1650    | 1480    | 1580    | 1390    | 1480    | 1320    | 1390    | ■       |
| LinerGY LGY 2000 (2 x 1000) | 2200                                       | 2000    | 2100    | 1900    | 2000    | 1820    | 1900    | 1720    | 1820    | 1620    | 1720    | ■       |
| LinerGY LGY 2500 (2 x 1250) | 2740                                       | 2500    | 2620    | 2380    | 2500    | 2260    | 2380    | 2120    | 2260    | 2020    | 2120    | ■       |
| LinerGY LGY 3200 (2 x 1600) | 3480                                       | 3200    | 3340    | 3060    | 3200    | 2920    | 3060    | 2780    | 2920    | 2640    | 2780    | ■       |


■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

#### Example:


A Linergy LGY channelled bar can be used for a 1650 A current with an IP ≤ 31 and an ambient temperature around the switchboard of 35 °C.




DD381233 eps



DD381234 eps



DD381235 eps



DD385507 eps



Section 630 A.  
Cat. No. LVS04502.




Section 800 A.  
Cat. No. LVS04503.



Section 1000 A.  
Cat. No. LVS04504.



Section 1250 A.  
Cat. No. LVS04505.



DD385508 eps



Section 1600 A.  
Cat. No. LVS04506.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

# Designing vertical busbars

## LinerGY LGYE

### Electrical characteristics


#### Permissible current and selection of Linergy LGYE busbars

Up to 4000 A


LinerGY LGYE section

| Type of bars      | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                   | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                   | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase    | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| LinerGY LGYE 630  | 680                                        | 580     | 650     | 550     | 630     | 530     | 590     | 500     | 550     | 470     | 520     | ■       |
| LinerGY LGYE 800  | 860                                        | 740     | 830     | 710     | 800     | 680     | 750     | 630     | 700     | 600     | 660     | ■       |
| LinerGY LGYE 1000 | 1080                                       | 920     | 1040    | 884     | 1000    | 850     | 940     | 790     | 880     | 750     | 830     | ■       |
| LinerGY LGYE 1250 | 1350                                       | 1150    | 1300    | 1100    | 1250    | 1050    | 1170    | 1000    | 1100    | 930     | 1020    | ■       |
| LinerGY LGYE 1600 | 1730                                       | 1580    | 1690    | 1530    | 1650    | 1480    | 1550    | 1380    | 1450    | 1300    | 1350    | ■       |
| LinerGY LGYE 2000 | 2200                                       | 1810    | 2100    | 1730    | 2000    | 1650    | 1900    | 1560    | 1810    | 1480    | 1720    | ■       |
| LinerGY LGYE 2500 | 2640                                       | 2230    | 2540    | 2160    | 2440    | 2100    | 2310    | 2000    | 2240    | 1930    | 2120    | ■       |
| LinerGY LGYE 3200 | 3400                                       | 3020    | 3300    | 2900    | 3200    | 2800    | 3040    | 2660    | 2890    | 2520    | 2750    | ■       |
| LinerGY LGYE 4000 | 3800                                       | 3510    | 3710    | 3430    | 3620    | 3350    | 3450    | 3180    | 3280    | 3020    | 3120    | ■       |


■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.




Section 630 A.  
Cat. No. LVS04560.




Section 800 A.  
Cat. No. LVS04561.




Section 1000 A.  
Cat. No. LVS04562.




Section 1250 A.  
Cat. No. LVS04563.




Section 1600 A.  
Cat. No. LVS04564.




Section 2000 A.  
Cat. No. LVS04565.



Section 2500 A.  
Cat. No. LVS04566.



Section 3200 A.  
Cat. No. LVS04567.



Section 4000 A.  
Cat. No. LVS04568.

# Designing vertical busbars

## Linery BS

### Electrical characteristics

#### Permissible current and selection of vertical busbar

The goal is to optimise busbar size according to the installation and operating criteria.

#### Up to 1600 A

##### Linery BS bars, 5 mm thick

| Type of bars              | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                           | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                           | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase            | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linergy BS bar, 60 x 5  | 890                                        | 840     | 850     | 790     | 800     | 750     | 760     | 700     | 710     | 650     | 660     | ■       |
| 1 Linergy BS bar, 80 x 5  | 1130                                       | 1050    | 1080    | 990     | 1000    | 900     | 970     | 870     | 910     | 810     | 860     | ■       |
| 2 Linergy BS bars, 60 x 5 | 1580                                       | 1420    | 1500    | 1350    | 1400    | 1250    | 1350    | 1180    | 1260    | 1090    | 1180    | ■       |
| 2 Linergy BS bars, 80 x 5 | 2010                                       | 1820    | 1920    | 1720    | 1800    | 1600    | 1720    | 1510    | 1610    | 1390    | 1510    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

#### Up to 3200 A

##### Linery BS bars, 10 mm thick

| Type of bars                  | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-------------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                               | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                               | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase                | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linergy BS bar, 50 x 10     | 1330                                       | 1220    | 1260    | 1160    | 1200    | 1080    | 1130    | 1010    | 1060    | 940     | 990     | ■       |
| 1 Linergy BS bar, 60 x 10     | 1550                                       | 1400    | 1470    | 1320    | 1400    | 1250    | 1320    | 1160    | 1240    | 1070    | 1160    | ■       |
| 1 Linergy BS bar, 80 x 10     | 1990                                       | 1800    | 1890    | 1700    | 1800    | 1600    | 1700    | 1500    | 1600    | 1390    | 1500    | ■       |
| 1 Linergy BS bar, 100 x 10    | 2370                                       | 2150    | 2260    | 2030    | 2150    | 1900    | 2030    | 1780    | 1900    | 1650    | 1780    | ■       |
| 2 Linergy BS bars, 50 x 10    | 2270                                       | 2090    | 2160    | 1980    | 2050    | 1850    | 1930    | 1740    | 1810    | 1610    | 1690    | ■       |
| 2 Linergy BS bars, 60 x 10    | 2550                                       | 2270    | 2420    | 2140    | 2300    | 2000    | 2170    | 1870    | 2030    | 1720    | 1900    | ■       |
| 2 Linergy BS bars, 80 x 10    | 3110                                       | 2820    | 2970    | 2660    | 2820    | 2500    | 2660    | 2330    | 2500    | 2160    | 2330    | ■       |
| 2 x 1 Linergy BS bar, 80 x 10 | 3540                                       | 3200    | 3370    | 3020    | 3200    | 2820    | 3020    | 2650    | 2840    | 2450    | 2650    | ■       |
| 2 Linergy BS bars, 100 x 10   | 3650                                       | 3280    | 3490    | 3100    | 3300    | 2900    | 3130    | 2720    | 2950    | 2510    | 2750    | ■       |
| 2 Linergy BS bars, 120 x 10   | 4160                                       | 3760    | 3960    | 3550    | 3760    | 3340    | 3560    | 3100    | 3340    | 2880    | 3120    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

#### Example

Two 80 x 10 mm bars can be used for a 2820 A current with an IP ≤ 31 and an ambient temperature of 35 °C around the switchboard.

Two 80 x 10 mm bars installed separately in two busbar compartments can be used for a 3200 A current with an IP ≤ 31 and an ambient temperature of 35 °C around the switchboard.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

## Designing rear busbars

Linerigy LGYE, Linerigy BS

## Electrical characteristics

## Permissible current and selection of vertical busbar

The goal is to optimise busbar size according to the installation and operating criteria.

## Up to 1600 A

## Linerigy LGY section

| Type of bars      | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                   | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                   | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                   | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| Linerigy LGY 630  | 750                                        | 680     | 710     | 630     | 680     | 590     | 630     | 550     | 590     | 530     | 550     | ■       |
| Linerigy LGY 800  | 920                                        | 840     | 880     | 800     | 840     | 760     | 800     | 720     | 760     | 680     | 720     | ■       |
| Linerigy LGY 1000 | 1140                                       | 1040    | 1090    | 990     | 1040    | 950     | 990     | 900     | 950     | 850     | 900     | ■       |
| Linerigy LGY 1250 | 1410                                       | 1290    | 1350    | 1230    | 1290    | 1170    | 1230    | 1100    | 1170    | 1050    | 1100    | ■       |
| Linerigy LGY 1600 | 1800                                       | 1650    | 1720    | 1580    | 1650    | 1480    | 1580    | 1390    | 1480    | 1320    | 1390    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Up to 1600 A

## Linerigy BS bars, 5 mm thick

| Type of bars               | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|----------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                            | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                            | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase             | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linerigy BS bar, 60 x 5  | 890                                        | 840     | 850     | 790     | 800     | 750     | 760     | 700     | 710     | 650     | 660     | ■       |
| 1 Linerigy BS bar, 80 x 5  | 1130                                       | 1050    | 1080    | 990     | 1000    | 900     | 970     | 870     | 910     | 810     | 860     | ■       |
| 2 Linerigy BS bars, 60 x 5 | 1580                                       | 1420    | 1500    | 1350    | 1400    | 1250    | 1350    | 1180    | 1260    | 1090    | 1180    | ■       |
| 2 Linerigy BS bars, 80 x 5 | 2010                                       | 1820    | 1920    | 1720    | 1800    | 1600    | 1720    | 1510    | 1610    | 1390    | 1510    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Up to 3200 A

## Linerigy BS bars, 10 mm thick

| Type of bars                | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-----------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                             | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                             | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase              | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linerigy BS bar, 50 x 10  | 1330                                       | 1220    | 1260    | 1160    | 1200    | 1080    | 1130    | 1010    | 1060    | 940     | 990     | ■       |
| 1 Linerigy BS bar, 60 x 10  | 1550                                       | 1400    | 1470    | 1320    | 1400    | 1250    | 1320    | 1160    | 1240    | 1070    | 1160    | ■       |
| 1 Linerigy BS bar, 80 x 10  | 1990                                       | 1800    | 1890    | 1700    | 1800    | 1600    | 1700    | 1500    | 1600    | 1390    | 1500    | ■       |
| 2 Linerigy BS bars, 80 x 10 | 2270                                       | 2090    | 2160    | 1980    | 2050    | 1850    | 1930    | 1740    | 1810    | 1610    | 1690    | ■       |
| 2 Linerigy BS bars, 60 x 10 | 2550                                       | 2270    | 2420    | 2140    | 2300    | 2000    | 2170    | 1870    | 2030    | 1720    | 1900    | ■       |
| 2 Linerigy BS bars, 80 x 10 | 3110                                       | 2820    | 2970    | 2660    | 2820    | 2500    | 2660    | 2330    | 2500    | 2160    | 2330    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

## Designing connections between a device and busbars

Prefabricated connections for ComPacT NS630b to NS1600

## Electrical characteristics

## ComPacT NS630b to NS1600

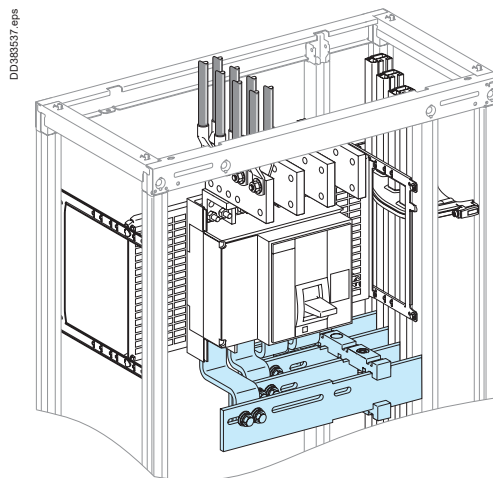
## Vertical mounting

Front or rear connection

Top or bottom incoming

Vertical busbars on the left or right

Linergy LGY busbars



Using the data below, it is possible to determine the permissible current for a prefabricated connection between a vertical ComPacT NS630b/NS1600, fixed or withdrawable, and Linergy LGY busbars depending on the ambient temperature around the switchboard and the IP value.

## Fixed

## Prefabricated connection

| Device and cat. no. |                      | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------|----------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                     |                      | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                     |                      | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                     |                      | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| NS630b              | 3P cat. no. LVS04485 | 630                                        | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | ■       |
|                     | 4P cat. no. LVS04486 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS800               | 3P cat. no. LVS04485 | 800                                        | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | ■       |
|                     | 4P cat. no. LVS04486 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1000              | 3P cat. no. LVS04485 | 1000                                       | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | ■       |
|                     | 4P cat. no. LVS04486 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1250              | 3P cat. no. LVS04485 | 1250                                       | 1250    | 1250    | 1250    | 1250    | 1250    | 1250    | 1200    | 1250    | 1150    | 1200    | ■       |
|                     | 4P cat. no. LVS04486 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1600              | 3P cat. no. LVS04487 | 1600                                       | 1550    | 1600    | 1500    | 1550    | 1450    | 1500    | 1400    | 1450    | 1350    | 1400    | ■       |
|                     | 4P cat. no. LVS04488 |                                            |         |         |         |         |         |         |         |         |         |         |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Withdrawable

## Prefabricated connection

| Device and cat. no. |                      | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------|----------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                     |                      | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                     |                      | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                     |                      | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| NS630b              | 3P cat. no. LVS04477 | 630                                        | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | ■       |
|                     | 4P cat. no. LVS04478 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS800               | 3P cat. no. LVS04477 | 800                                        | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | ■       |
|                     | 4P cat. no. LVS04478 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1000              | 3P cat. no. LVS04477 | 1000                                       | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | ■       |
|                     | 4P cat. no. LVS04478 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1250              | 3P cat. no. LVS04477 | 1250                                       | 1250    | 1250    | 1250    | 1250    | 1250    | 1250    | 1200    | 1250    | 1150    | 1200    |         |
|                     | 4P cat. no. LVS04478 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1600              | 3P cat. no. LVS04491 | 1560                                       | 1480    | 1520    | 1430    | 1480    | 1380    | 1430    | 1330    | 1380    | 1280    | 1330    | ■       |
|                     | 4P cat. no. LVS04492 |                                            |         |         |         |         |         |         |         |         |         |         |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Example:

For a fixed ComPacT NS1600, 4P, where the ambient temperature around the switchboard is 35 °C and the IP > 31:  
the maximum permissible current for the prefabricated connection (LVS04488) is 1450 A.



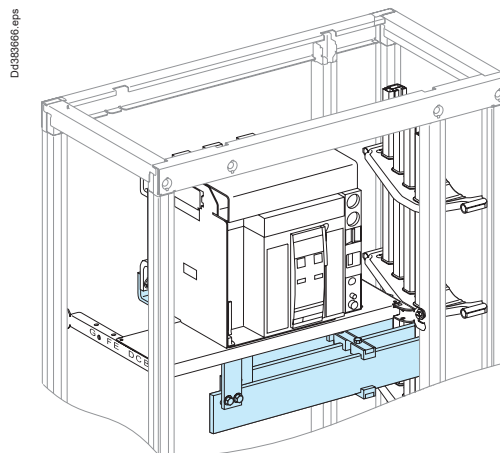
## Designing connections between a device and busbars

## Prefabricated connections for MasterPacT 06-16

## Electrical characteristics

MasterPacT MTZ106 to 16  
MasterPacT MTZ1 06 to 16  
Vertical mounting

Front or rear connection  
Top or bottom incoming  
Vertical busbars on the left or right  
Linergy LGY busbars



Using the data below, it is possible to determine the permissible current for a prefabricated connection between a vertical MasterPacT MTZ1 06/NT16, fixed or drawout, and Linergy LGY busbars depending on the ambient temperature around the switchboard and the IP value.

## Fixed

## Prefabricated connection

| Device and cat. no. |                      | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------|----------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                     |                      | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                     |                      | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                     |                      | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| NT06 & MTZ1         | 3P cat. no. LVS04475 | 630                                        | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | ■       |
|                     | 4P cat. no. LVS04476 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT08 & MTZ1         | 3P cat. no. LVS04475 | 800                                        | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | ■       |
|                     | 4P cat. no. LVS04476 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT10 & MTZ1         | 3P cat. no. LVS04475 | 1000                                       | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | ■       |
|                     | 4P cat. no. LVS04476 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT12 & MTZ1         | 3P cat. no. LVS04475 | 1250                                       | 1250    | 1250    | 1250    | 1250    | 1250    | 1250    | 1200    | 1250    | 1150    | 1200    | ■       |
|                     | 4P cat. no. LVS04476 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT16 & MTZ1         | 3P cat. no. LVS04489 | 1600                                       | 1570    | 1600    | 1520    | 1570    | 1470    | 1520    | 1420    | 1470    | 1370    | 1420    | ■       |
|                     | 4P cat. no. LVS04490 |                                            |         |         |         |         |         |         |         |         |         |         |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Withdrawable

## Prefabricated connection

| Device and cat. no. |                      | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------|----------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                     |                      | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                     |                      | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                     |                      | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| NT06 & MTZ1         | 3P cat. no. LVS04477 | 630                                        | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | ■       |
|                     | 4P cat. no. LVS04478 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT08 & MTZ1         | 3P cat. no. LVS04477 | 800                                        | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | ■       |
|                     | 4P cat. no. LVS04478 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT10 & MTZ1         | 3P cat. no. LVS04477 | 1000                                       | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | ■       |
|                     | 4P cat. no. LVS04478 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT12 & MTZ1         | 3P cat. no. LVS04477 | 1250                                       | 1250    | 1250    | 1250    | 1250    | 1250    | 1250    | 1200    | 1250    | 1150    | 1200    | ■       |
|                     | 4P cat. no. LVS04478 |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT16 & MTZ1         | 3P cat. no. LVS04491 | 1560                                       | 1480    | 1520    | 1430    | 1480    | 1380    | 1430    | 1330    | 1380    | 1280    | 1330    | ■       |
|                     | 4P cat. no. LVS04492 |                                            |         |         |         |         |         |         |         |         |         |         |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Example:

For a drawout MasterPacT MTZ1 16, 4P, where the ambient temperature around the switchboard is 35°C and the IP > 31: the maximum permissible current for the prefabricated connection (LVS04492) is 1380 A.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

# Designing connections between a device and busbars

## Prefabricated connections for ComPacT NS630b to NS1000

### Electrical characteristics

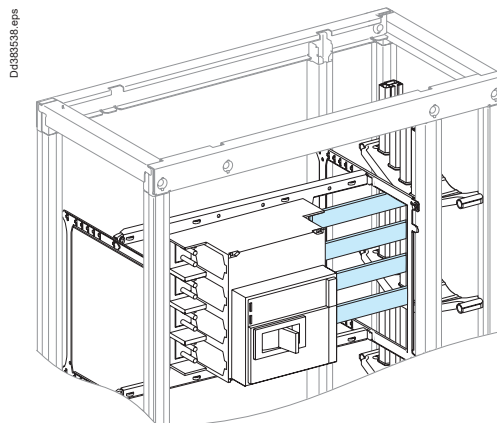
#### ComPacT NS630b à NS1000

##### Horizontal mounting

Front or rear connection

Left or right incoming

Linery LGY vertical busbars



Using the data below, it is possible to determine the permissible current for a prefabricated connection between a horizontal ComPacT NS630b/NS1600, fixed or withdrawable, and Linery LGY busbars depending on the ambient temperature around the switchboard and the IP value.

#### Fixed

##### Prefabricated connection

| Device and cat. no. |                             | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------|-----------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                     |                             | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                     |                             | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                     |                             | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| NS630b              | 3P cat. no. <b>LVS04473</b> | 630                                        | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | ■       |
|                     | 4P cat. no. <b>LVS04474</b> |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS800               | 3P cat. no. <b>LVS04473</b> | 800                                        | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | ■       |
|                     | 4P cat. no. <b>LVS04474</b> |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1000              | 3P cat. no. <b>LVS04473</b> | 1000                                       | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | ■       |
|                     | 4P cat. no. <b>LVS04474</b> |                                            |         |         |         |         |         |         |         |         |         |         |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

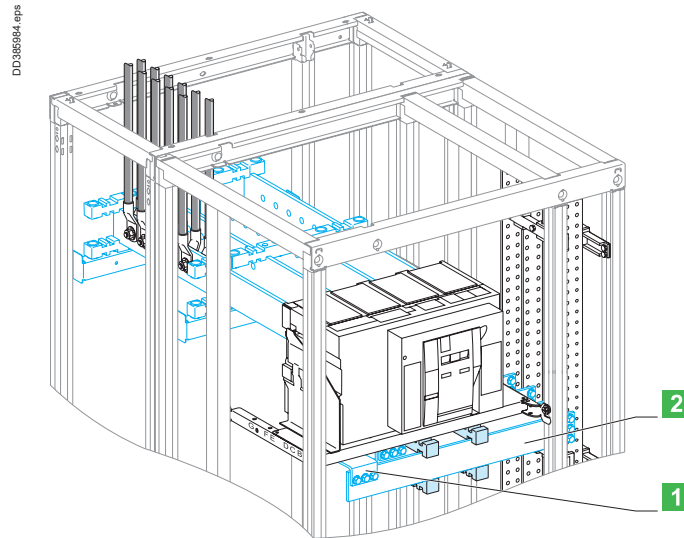
## Designing connections between a device and busbars

Fixed MasterPacT 08-16

## Electrical characteristics

MasterPacT MTZ208 to 16  
MasterPacT MTZ2 08 to 16  
Fixed

Vertical busbars on the left or right  
Linergy LGY, BS busbars  
Connections drawings supplied by  
Schneider Electric



- 1 Liaison  
2 Horizontal link.

Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making the connections to busbars for a vertical, fixed MasterPacT NW08/16, front or rear connection, taking into account the ambient temperature around the switchboard and the IP value.

## Connection

Flat bars, 5 mm thick

| Device      |                | Permissible current (A)                        |           |           |           |           |           |           |           |           |           |           |         |
|-------------|----------------|------------------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|
|             |                | Ambient temperature around the switchboard (1) |           |           |           |           |           |           |           |           |           |           |         |
|             |                | 25 °C                                          |           | 30 °C     |           | 35 °C     |           | 40 °C     |           | 45 °C     |           | 50 °C     |         |
|             |                | IP ≤ 31                                        | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 80 x 5                                      | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 800                                            | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       |         |
| NW10 & MTZ2 | Size per phase | 1b 80 x 5                                      | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 1000                                           | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      |         |
| NW12 & MTZ2 | Size per phase | 2b 80 x 5                                      | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1250                                           | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      |         |
| NW16 & MTZ2 | Size per phase | 2b 80 x 5                                      | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1600                                           | 1600      | 1600      | 1570      | 1600      | 1520      | 1570      | 1470      | 1520      | 1420      | 1470      |         |

## Horizontal link

Flat bars, 5 mm thick

| Device      |                | Permissible current (A)                    |           |           |           |           |           |           |           |           |           |           |         |
|-------------|----------------|--------------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|
|             |                | Ambient temperature around the switchboard |           |           |           |           |           |           |           |           |           |           |         |
|             |                | 25 °C                                      |           | 30 °C     |           | 35 °C     |           | 40 °C     |           | 45 °C     |           | 50 °C     |         |
|             |                | IP ≤ 31                                    | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 80 x 5                                  | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 800                                        | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       |         |
| NW10 & MTZ2 | Size per phase | 1b 80 x 5                                  | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 1000                                       | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      |         |
| NW12 & MTZ2 | Size per phase | 2b 80 x 5                                  | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1250                                       | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      |         |
| NW16 & MTZ2 | Size per phase | 2b 80 x 5                                  | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1600                                       | 1600      | 1600      | 1570      | 1600      | 1520      | 1570      | 1470      | 1520      | 1420      | 1470      |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

(1) In the case of a door mounted at the rear of cubicle, add 10 °C.

Note: the values indicated above have been validated for PrismaSeT P Active switchboards.

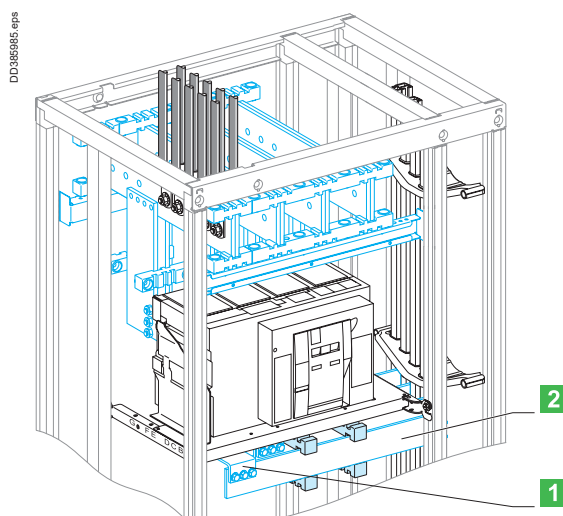
## Designing connections between a device and busbars

Fixed MasterPacT 08-32

## Electrical characteristics

MasterPact MTZ208 to 32  
MasterPacT MTZ2 08 to 32  
Fixed

Vertical busbars on the left or right  
Linery LGE, LGY, BS busbars  
Connections drawings supplied by  
Schneider Electric



1 Connection.

2 Horizontal link.

Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making the connections to busbars for a vertical, fixed MasterPact MTZ2 08/32, front or rear connection, taking into account the ambient temperature around the switchboard and the IP value.

## Connection

Flat bars, 10 mm thick

| Device      |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|-------------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|             |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|             |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|             |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        |         |
| NW10 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       |         |
| NW12 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1250                                       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       |         |
| NW16 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1600                                       | 1600       | 1600       | 1570       | 1600       | 1520       | 1570       | 1470       | 1520       | 1420       | 1470       |         |
| NW20 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2000                                       | 2000       | 2000       | 2000       | 2000       | 2000       | 2000       | 1950       | 2000       | 1900       | 1950       |         |
| NW25 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2500                                       | 2500       | 2500       | 2500       | 2500       | 2460       | 2500       | 2380       | 2500       | 2300       | 2460       |         |
| NW32 & MTZ2 | Size per phase | 3b 80 x 10                                 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | ■       |
|             | I (A)          | 3200                                       | 3000       | 3170       | 2910       | 3080       | 2820       | 3000       | 2730       | 2910       | 2630       | 2820       |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Horizontal link

Flat bars, 10 mm thick

| Device      |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|-------------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|             |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|             |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|             |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 60 x 10                                 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | ■       |
|             | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        |         |
| NW10 & MTZ2 | Size per phase | 1b 60 x 10                                 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | ■       |
|             | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       |         |
| NW12 & MTZ2 | Size per phase | 1b 60 x 10                                 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | ■       |
|             | I (A)          | 1250                                       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       |         |
| NW16 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1600                                       | 1600       | 1600       | 1570       | 1600       | 1520       | 1570       | 1470       | 1520       | 1420       | 1470       |         |
| NW20 & MTZ2 | Size per phase | 2b 60 x 10                                 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | ■       |
|             | I (A)          | 2000                                       | 2000       | 2000       | 2000       | 2000       | 2000       | 2000       | 1950       | 2000       | 1900       | 1950       |         |
| NW25 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2500                                       | 2500       | 2500       | 2500       | 2500       | 2460       | 2500       | 2380       | 2500       | 2300       | 2460       |         |
| NW32 & MTZ2 | Size per phase | 2b 100x10                                  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | ■       |
|             | I (A)          | 3200                                       | 3000       | 3170       | 2910       | 3080       | 2820       | 3000       | 2730       | 2910       | 2630       | 2820       |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

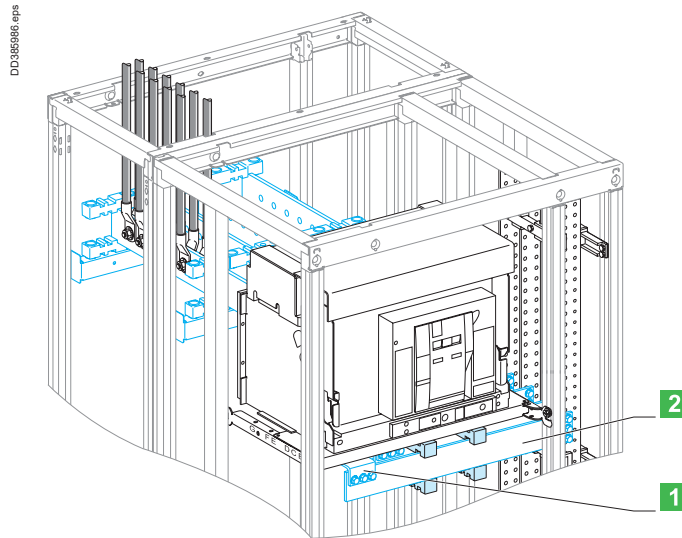
## Designing connections between a device and busbars

## Drawout MasterPacT 08-16

## Electrical characteristics

MasterPacT MTZ208 to 16  
MasterPacT MTZ2 08 to 16  
Drawout

Vertical busbars on the left or right  
Linergy LGY, BS busbars  
Connections drawings supplied by  
Schneider Electric



**1** Connection.

**2** Horizontal link.

Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making the connections to busbars for a vertical, drawout MasterPacT MTZ2 08/16, front or rear connection, taking into account the ambient temperature around the switchboard and the IP value.

## Connection

Flat bars, 5 mm thick

| Device      |                | Permissible current (A)                        |           |           |           |           |           |           |           |           |           |           |         |
|-------------|----------------|------------------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|
|             |                | Ambient temperature around the switchboard (1) |           |           |           |           |           |           |           |           |           |           |         |
|             |                | 25 °C                                          |           | 30 °C     |           | 35 °C     |           | 40 °C     |           | 45 °C     |           | 50 °C     |         |
|             |                | IP ≤ 31                                        | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 80 x 5                                      | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 800                                            | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       |         |
| NW10 & MTZ2 | Size per phase | 1b 80 x 5                                      | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 1000                                           | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      |         |
| NW12 & MTZ2 | Size per phase | 2b 80 x 5                                      | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1250                                           | 1250      | 1250      | 1250      | 1250      | 1230      | 1250      | 1200      | 1230      | 1160      | 1200      |         |
| NW16 & MTZ2 | Size per phase | 2b 80 x 5                                      | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1560                                           | 1480      | 1520      | 1430      | 1480      | 1380      | 1430      | 1330      | 1380      | 1280      | 1330      |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Horizontal link

Flat bars, 5 mm thick

| Device      |                | Permissible current (A)                    |           |           |           |           |           |           |           |           |           |           |         |
|-------------|----------------|--------------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|
|             |                | Ambient temperature around the switchboard |           |           |           |           |           |           |           |           |           |           |         |
|             |                | 25 °C                                      |           | 30 °C     |           | 35 °C     |           | 40 °C     |           | 45 °C     |           | 50 °C     |         |
|             |                | IP ≤ 31                                    | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 80 x 5                                  | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 800                                        | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       |         |
| NW10 & MTZ2 | Size per phase | 1b 80 x 5                                  | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | 1b 80 x 5 | ■       |
|             | I (A)          | 1000                                       | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      |         |
| NW12 & MTZ2 | Size per phase | 2b 80 x 5                                  | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1250                                       | 1250      | 1250      | 1250      | 1250      | 1230      | 1250      | 1200      | 1230      | 1160      | 1200      |         |
| NW16 & MTZ2 | Size per phase | 2b 80 x 5                                  | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|             | I (A)          | 1560                                       | 1480      | 1520      | 1430      | 1480      | 1380      | 1430      | 1330      | 1380      | 1280      | 1330      |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

(1) In the case of a door mounted at the rear of cubicle, add 10 °C.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

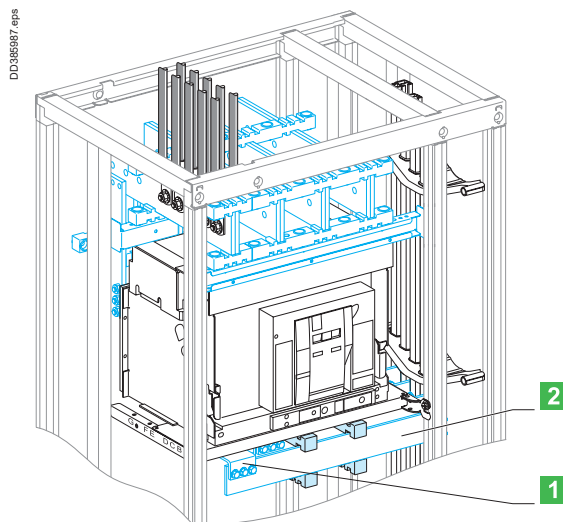
## Designing connections between a device and busbars

Drawout MasterPacT 08-32

## Electrical characteristics

MasterPacT MTZ208 to 32  
MasterPacT MTZ2 08 to 32  
Drawout

Vertical busbars on the left or right  
Linergy LGE, LGY, BS busbars  
Connections drawings supplied by  
Schneider Electric



1 Connection.

2 Horizontal link.

Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making the connections to busbars for a vertical, drawout MasterPacT MTZ2 08/32, front or rear connection, taking into account the ambient temperature around the switchboard and the IP value.

## Connection

Flat bars, 10 mm thick

| Device      |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|-------------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|             |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|             |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|             |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | ■       |
| NW10 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | ■       |
| NW12 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1250                                       | 1250       | 1250       | 1210       | 1250       | 1180       | 1210       | 1140       | 1180       | 1100       | 1140       | ■       |
| NW16 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1560                                       | 1480       | 1520       | 1430       | 1480       | 1380       | 1430       | 1330       | 1380       | 1280       | 1330       | ■       |
| NW20 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2000                                       | 2000       | 2000       | 1950       | 2000       | 1900       | 1950       | 1830       | 1900       | 1760       | 1830       | ■       |
| NW25 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2470                                       | 2280       | 2410       | 2210       | 2350       | 2140       | 2280       | 2070       | 2210       | 2000       | 2140       | ■       |
| NW32 & MTZ2 | Size per phase | 3b 80 x 10                                 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | 3b 80 x 10 | ■       |
|             | I (A)          | 2960                                       | 2730       | 2890       | 2630       | 2820       | 2530       | 2730       | 2450       | 2630       | 2370       | 2530       | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Horizontal link

Flat bars, 10 mm thick

| Device      |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|-------------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|             |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|             |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|             |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NW08 & MTZ2 | Size per phase | 1b 60 x 10                                 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | ■       |
|             | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | ■       |
| NW10 & MTZ2 | Size per phase | 1b 60 x 10                                 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | ■       |
|             | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | ■       |
| NW12 & MTZ2 | Size per phase | 1b 60 x 10                                 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | 1b 60 x 10 | ■       |
|             | I (A)          | 1250                                       | 1250       | 1250       | 1210       | 1250       | 1180       | 1210       | 1140       | 1180       | 1100       | 1140       | ■       |
| NW16 & MTZ2 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|             | I (A)          | 1560                                       | 1480       | 1520       | 1430       | 1480       | 1380       | 1430       | 1330       | 1380       | 1280       | 1330       | ■       |
| NW20 & MTZ2 | Size per phase | 2b 60 x 10                                 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | 2b 60 x 10 | ■       |
|             | I (A)          | 2000                                       | 2000       | 2000       | 1950       | 2000       | 1900       | 1950       | 1830       | 1900       | 1760       | 1830       | ■       |
| NW25 & MTZ2 | Size per phase | 2b 80 x 10                                 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | 2b 80 x 10 | ■       |
|             | I (A)          | 2470                                       | 2280       | 2410       | 2210       | 2350       | 2140       | 2280       | 2070       | 2210       | 2000       | 2140       | ■       |
| NW32 & MTZ2 | Size per phase | 2b 100x10                                  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | 2b 100x10  | ■       |
|             | I (A)          | 2960                                       | 2730       | 2890       | 2630       | 2820       | 2530       | 2730       | 2450       | 2630       | 2370       | 2530       | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

Note: the values indicated above have been validated for PrismaSeT P Active switchboards.

# Designing connections ≤ 630 A

## Device connections

## Electrical characteristics

### Flexible copper bars with an insulating sheath

#### Switchboards that comply with standard IEC 61439-1/2

It is imperative to use the values indicated below that have been validated for the installation of devices in PrismaSeT switchboards.

The parameters determining the size of flexible bars are:

- the environment in which the devices are installed:
  - position in the enclosure
  - dimensions of other conductors in the circuit
  - ambient temperature around the switchboard
- the characteristics of the connected devices:
  - device heat losses
  - the type of installation (horizontal or vertical)
  - the type of device (fixed or withdrawable).

Only the equipment manufacturer with in-depth knowledge on:

- the characteristics of the installed devices
- the configuration of the installation in the enclosure can provide the correct sizes of flexible bars for a given permissible current.

Insulated, flexible bars make for easy, fast and flexible implementation up to 630 A, but higher ratings require sizes that cancel these advantages.

For high  $I_{sc}$  values, it is advised to use rigid bars which require fewer supports.

#### Insulated flexible bars are better than cables, they offer:

- better insulation temperature withstand (125 °C for bars, 105 °C for cables) and a larger exchange surface for an equivalent size, i.e. a smaller size for a given current
- greater rigidity offering better electrodynamic characteristics for short-circuit currents
- no intermediate parts (lugs) for a direct connection between the device and the busbars therefore less temperature rise and less risk of error
- fast implementation of prefabricated connections already cut to length, formed and drilled.
- length limited to 500 mm.

#### Technical characteristics

- thickness of the insulation: variable depending on the bar size, 2 mm on average
- rated insulation level  $U_i = 1000$  V
- impulse withstand voltage  $U_{imp} = 12$  kV
- maximum withstand temperature of insulating material = 125 °C.

## Connection

In all cubicles with IP ≤ 55 :

- the switchboard internal temperature is 60 °C
- the withstand temperature of the insulating material is 125 °C.

If the withstand temperature of the insulation is only 105 °C, use the next largest size of flexible bar given for standard insulated flexible bars (withstand temperature = 125 °C)

The bar sizes indicated below take into account the derating curves of devices.

#### Connection of devices to busbars

| Device | INS-INV125 | INS-INV160 | INS-INV250 | INS-INV320<br>INS-INV400 | INS-INV500<br>INS-INV630 | GS250<br>ISFT250 | GS400<br>ISFT400 | GS630<br>ISFT630 |
|--------|------------|------------|------------|--------------------------|--------------------------|------------------|------------------|------------------|
| S (mm) | 20 x 2     | 20 x 2     | 20 x 3     | 32 x 5                   | 32 x 6                   | 24 x 5           | 32 x 5           | 32 x 8           |

#### Connection of distribution blocks to busbars

| Distribution block | Linerigy FM 200 A | Linerigy FC 3P | Linerigy FC 4P |
|--------------------|-------------------|----------------|----------------|
| S (mm)             | 20 x 3            | 32 x 8         | 32 x 8         |

#### Connection of disconnectors, Linerigy TB, connections, busbars to busbars

| I max. (60 °C) | 200 A  | 250 A  | 400 A  | 400 A  | 480 A  | 520 A  | 580 A  | 660 A  |
|----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| S (mm)         | 20 x 2 | 20 x 3 | 24 x 5 | 24 x 5 | 24 x 6 | 32 x 5 | 32 x 6 | 32 x 8 |

**Note:** The values indicated above have been validated for PrismaSeT P Active switchboards.



## Designing connections ≤ 630 A

ComPacT circuit breakers NSX100 to NSX630

Insulated flexible copper bars <sup>(1)</sup>

Electrical characteristics

## ComPacT NSX100 to NSX630

Insulated flexible copper bars (withstand temperature = 125 °C)

We recommend insulated flexible copper bars for ComPacT NSX connections from 100 to 630 A

| Devices                                                                                   |                     | Permissible current (A)                    |        |        |        |        |        |
|-------------------------------------------------------------------------------------------|---------------------|--------------------------------------------|--------|--------|--------|--------|--------|
|                                                                                           |                     | Ambient temperature around the switchboard |        |        |        |        |        |
|                                                                                           |                     | 25 °C                                      | 30 °C  | 35 °C  | 40 °C  | 45 °C  | 50 °C  |
| <b>IP ≤ 31</b>                                                                            |                     |                                            |        |        |        |        |        |
| NSX100<br>TMD-TMG                                                                         | Size per phase      | 20 x 2                                     | 20 x 2 | 20 x 2 | 20 x 2 | 20 x 2 | 20 x 2 |
|                                                                                           | I <sub>nc</sub> (A) | 100                                        | 100    | 100    | 97.5   | 95     | 92.5   |
| NSX125<br>TMD-TMG                                                                         | Size per phase      | 20 x 2                                     | 20 x 2 | 20 x 2 | 20 x 2 | 20 x 2 | 20 x 2 |
|                                                                                           | I <sub>nc</sub> (A) | 125                                        | 125    | 125    | 122    | 119    | 115    |
| NSX160 (2)<br>TMD-TMG                                                                     | Size per phase      | 20 x 3                                     | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 |
|                                                                                           | I <sub>nc</sub> (A) | 160                                        | 160    | 160    | 156    | 152    | 148    |
| NSX250 (2)<br>TMD-TMG                                                                     | Size per phase      | 20 x 3                                     | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 |
|                                                                                           | I <sub>nc</sub> (A) | 250                                        | 244    | 238    | 231    | 225    | 219    |
| NSX100<br>STR                                                                             | Size per phase      | 20 x 2                                     | 20 x 2 | 20 x 2 | 20 x 2 | 20 x 2 | 20 x 2 |
|                                                                                           | I <sub>nc</sub> (A) | 100                                        | 100    | 100    | 100    | 100    | 100    |
| NSX160<br>STR                                                                             | Size per phase      | 20 x 3                                     | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 |
|                                                                                           | I <sub>nc</sub> (A) | 160                                        | 160    | 160    | 160    | 160    | 160    |
| NSX250 (3)<br>STR                                                                         | Size per phase      | 20 x 3                                     | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 |
|                                                                                           | I <sub>nc</sub> (A) | 250                                        | 245    | 237    | 230    | 225    | 220    |
| NSX400B/F/N/H/S/L<br>fixed                                                                | Size per phase      | 32 x 5                                     | 32 x 5 | 32 x 5 | 32 x 5 | 32 x 5 | 32 x 5 |
|                                                                                           | I <sub>nc</sub> (A) | 400                                        | 400    | 400    | 390    | 380    | 370    |
| NSX400B/F/N/H/S/L with Vigi<br>NSX400B/F/N/H/S/L ELCB                                     | Size per phase      | 32 x 5                                     | 32 x 5 | 32 x 5 | 32 x 5 | 32 x 5 | 32 x 5 |
|                                                                                           | I <sub>nc</sub> (A) | 400                                        | 390    | 380    | 370    | 360    | 350    |
| NSX400B/F/N/H/S/L<br>withdrawable                                                         | Size per phase      | 32 x 5                                     | 32 x 5 | 32 x 5 | 32 x 5 | 32 x 5 | 32 x 5 |
|                                                                                           | I <sub>nc</sub> (A) | 400                                        | 390    | 380    | 370    | 360    | 350    |
| NSX630B/F/N/H/S/L<br>fixed                                                                | Size per phase      | 32 x 6                                     | 32 x 6 | 32 x 6 | 32 x 6 | 32 x 6 | 32 x 6 |
|                                                                                           | I <sub>nc</sub> (A) | 630                                        | 615    | 600    | 585    | 570    | 550    |
| NSX630B/F/N/H/S/L with Vigi or withdrawable<br>NSX630B/F/N/H/S/L ELCB                     | Size per phase      | 32 x 8                                     | 32 x 8 | 32 x 8 | 32 x 8 | 32 x 8 | 32 x 8 |
|                                                                                           | I <sub>nc</sub> (A) | 570                                        | 550    | 535    | 520    | 505    | 490    |
| <b>IP &gt; 31</b>                                                                         |                     |                                            |        |        |        |        |        |
| NSX100<br>TMD-TMG                                                                         | Size per phase      | 20 x 2                                     | 20 x 2 | 20 x 2 | 20 x 2 | 20 x 2 | 20 x 2 |
|                                                                                           | I <sub>nc</sub> (A) | 100                                        | 100    | 100    | 97.5   | 95     | 92.5   |
| NSX125<br>TMD-TMG                                                                         | Size per phase      | 20 x 2                                     | 20 x 2 | 20 x 2 | 20 x 2 | 20 x 2 | 20 x 2 |
|                                                                                           | I <sub>nc</sub> (A) | 125                                        | 125    | 125    | 122    | 119    | 115    |
| NSX160 (2)<br>TMD-TMG                                                                     | Size per phase      | 20 x 3                                     | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 |
|                                                                                           | I <sub>nc</sub> (A) | 160                                        | 160    | 160    | 156    | 152    | 148    |
| NSX250 (2)<br>TMD-TMG                                                                     | Size per phase      | 20 x 3                                     | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 |
|                                                                                           | I <sub>nc</sub> (A) | 238                                        | 231    | 225    | 219    | 213    | 207    |
| NSX100<br>STR                                                                             | Size per phase      | 20 x 2                                     | 20 x 2 | 20 x 2 | 20 x 2 | 20 x 2 | 20 x 2 |
|                                                                                           | I <sub>nc</sub> (A) | 100                                        | 100    | 100    | 100    | 100    | 100    |
| NSX160<br>STR                                                                             | Size per phase      | 20 x 3                                     | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 |
|                                                                                           | I <sub>nc</sub> (A) | 160                                        | 160    | 160    | 160    | 160    | 160    |
| NSX250 (3)<br>STR                                                                         | Size per phase      | 20 x 3                                     | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 | 20 x 3 |
|                                                                                           | I <sub>nc</sub> (A) | 237                                        | 230    | 225    | 220    | 215    | 210    |
| NSX400B/F/N/H/S/L<br>fixed                                                                | Size per phase      | 32 x 5                                     | 32 x 5 | 32 x 5 | 32 x 5 | 32 x 5 | 32 x 5 |
|                                                                                           | I <sub>nc</sub> (A) | 400                                        | 400    | 400    | 390    | 380    | 370    |
| Vigi NSX400B/F/N/H/S/L<br>NSX400B/F/N/H/S/L Vigi (ELCB)                                   | Size per phase      | 32 x 5                                     | 32 x 5 | 32 x 5 | 32 x 5 | 32 x 5 | 32 x 5 |
|                                                                                           | I <sub>nc</sub> (A) | 400                                        | 390    | 380    | 370    | 360    | 350    |
| NSX400B/F/N/H/S/L<br>withdrawable                                                         | Size per phase      | 32 x 5                                     | 32 x 5 | 32 x 5 | 32 x 5 | 32 x 5 | 32 x 5 |
|                                                                                           | I <sub>nc</sub> (A) | 400                                        | 390    | 380    | 370    | 360    | 350    |
| NSX630B/F/N/H/S/L<br>fixed                                                                | Size per phase      | 32 x 6                                     | 32 x 6 | 32 x 6 | 32 x 6 | 32 x 6 | 32 x 6 |
|                                                                                           | I <sub>nc</sub> (A) | 600                                        | 585    | 570    | 550    | 535    | 520    |
| NSX630B/F/N/H/S/L withdrawable<br>Vigi NSX630B/F/N/H/S/L<br>NSX630B/F/N/H/S/L Vigi (ELCB) | Size per phase      | 32 x 8                                     | 32 x 8 | 32 x 8 | 32 x 8 | 32 x 8 | 32 x 8 |
|                                                                                           | I <sub>nc</sub> (A) | 535                                        | 520    | 505    | 490    | 475    | 420    |

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.**(1)** We recommend insulated flexible copper bars instead of copper cables for all NSX100 to NSX630 connection.**(2)** For a withdrawable NSX160/250 equipped with a Vigi or NSX Vigi 160/250 (ELCB) or an insulation-monitoring module, multiply the I<sub>n</sub> values by 0.9.**(3)** For a withdrawable NSX250 equipped with Vigi or NSX Vigi 250 (ELCB) or an insulation-monitoring module, multiply the I<sub>n</sub> values by 0.86.To connect a ComPacT NSX250 and NSX Vigi 250 ELCB to a Linergy BW busbars, use a 24 x 5 flexible bar cat. no. **LVS04746**.

# Designing connections ≤ 630 A

ComPacT circuit breakers NSX100 to NSX250

Copper cable

## Electrical characteristics

### Cables: practical guidelines

This section doesn't concern customer's loads connection (see IEC 61439-1, IEC 60364).

Schneider Electric provides cabling recommendations according to the rating of the circuit breaker.

The size of cables must be selected according to:

- the level of current
- the ambient temperature around the conductors
- the degree of protection for the switchboard.

The tables below take into account the installation conditions for each type of device (permissible temperature at connection terminals, etc.).

They follow the temperature derating values for installed devices in all cubicles with cover panels rated IP ≤ 55.

- switchboard internal temperature 60 °C
- connections using copper cables.

The withstand temperature of insulating material of cable = 105 °C.

The withstand voltage of insulating material of cable ≥ 1000 V.

## ComPacT NSX100 to NSX250

Copper cable, withstand temperature = 105 °C

| Devices               |                     | Permissible current (A)                    |                     |                     |                     |                     |                     |
|-----------------------|---------------------|--------------------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
|                       |                     | Ambient temperature around the switchboard |                     |                     |                     |                     |                     |
|                       |                     | 25 °C                                      | 30 °C               | 35 °C               | 40 °C               | 45 °C               | 50 °C               |
| <b>IP ≤ 31</b>        |                     |                                            |                     |                     |                     |                     |                     |
| NSX100<br>TMD-TMG     | Size per phase      | 50 mm <sup>2</sup>                         | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  |
|                       | I <sub>nc</sub> (A) | 100                                        | 100                 | 100                 | 97.5                | 95                  | 92.5                |
| NSX125<br>TMD-TMG     | Size per phase      | 70 mm <sup>2</sup>                         | 70 mm <sup>2</sup>  | 70 mm <sup>2</sup>  | 70 mm <sup>2</sup>  | 70 mm <sup>2</sup>  | 70 mm <sup>2</sup>  |
|                       | I <sub>nc</sub> (A) | 125                                        | 125                 | 125                 | 122                 | 119                 | 115                 |
| NSX160 (1)<br>TMD-TMG | Size per phase      | 95 mm <sup>2</sup>                         | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  |
|                       | I <sub>nc</sub> (A) | 160                                        | 160                 | 160                 | 156                 | 152                 | 148                 |
| NSX250 (1)<br>TMD-TMG | Size per phase      | 120 mm <sup>2</sup>                        | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> |
|                       | I <sub>nc</sub> (A) | 250                                        | 244                 | 238                 | 231                 | 225                 | 219                 |
| NSX100<br>STR         | Size per phase      | 50 mm <sup>2</sup>                         | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  |
|                       | I <sub>nc</sub> (A) | 100                                        | 100                 | 100                 | 100                 | 100                 | 100                 |
| NSX160<br>STR         | Size per phase      | 95 mm <sup>2</sup>                         | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  |
|                       | I <sub>nc</sub> (A) | 160                                        | 160                 | 160                 | 160                 | 160                 | 160                 |
| NSX250 (2)<br>STR     | Size per phase      | 120 mm <sup>2</sup>                        | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> |
|                       | I <sub>nc</sub> (A) | 250                                        | 245                 | 237                 | 230                 | 225                 | 220                 |
| <b>IP &gt; 31</b>     |                     |                                            |                     |                     |                     |                     |                     |
| NSX100<br>TMD-TMG     | Size per phase      | 50 mm <sup>2</sup>                         | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  |
|                       | I <sub>nc</sub> (A) | 100                                        | 100                 | 100                 | 97.5                | 95                  | 92.5                |
| NSX125<br>TMD-TMG     | Size per phase      | 70 mm <sup>2</sup>                         | 70 mm <sup>2</sup>  | 70 mm <sup>2</sup>  | 70 mm <sup>2</sup>  | 70 mm <sup>2</sup>  | 70 mm <sup>2</sup>  |
|                       | I <sub>nc</sub> (A) | 125                                        | 125                 | 125                 | 122                 | 119                 | 115                 |
| NSX160 (1)<br>TMD-TMG | Size per phase      | 95 mm <sup>2</sup>                         | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  |
|                       | I <sub>nc</sub> (A) | 160                                        | 160                 | 160                 | 156                 | 152                 | 148                 |
| NSX250 (1)<br>TMD-TMG | Size per phase      | 120 mm <sup>2</sup>                        | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> |
|                       | I <sub>nc</sub> (A) | 237                                        | 230                 | 225                 | 220                 | 215                 | 210                 |
| NSX100<br>STR         | Size per phase      | 50 mm <sup>2</sup>                         | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  | 50 mm <sup>2</sup>  |
|                       | I <sub>nc</sub> (A) | 100                                        | 100                 | 100                 | 100                 | 100                 | 100                 |
| NSX160<br>STR         | Size per phase      | 95 mm <sup>2</sup>                         | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  | 95 mm <sup>2</sup>  |
|                       | I <sub>nc</sub> (A) | 160                                        | 160                 | 160                 | 160                 | 160                 | 160                 |
| NSX250 (2)<br>STR     | Size per phase      | 120 mm <sup>2</sup>                        | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> | 120 mm <sup>2</sup> |
|                       | I <sub>nc</sub> (A) | 237                                        | 230                 | 225                 | 220                 | 215                 | 210                 |

(1) For a withdrawable NSX160/250 equipped with a Vigi or NSX Vigi 160/250 (ELCB) or an insulation-monitoring module, multiply the I<sub>n</sub> values by 0.9.

(2) For a withdrawable NSX250 equipped with a Vigi or NSX Vigi 250 (ELCB) or an insulation-monitoring module, multiply the I<sub>n</sub> values by 0.86.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

**Note:** Schneider Electric recommends connecting ComPacT NSX400/630 circuit breakers with insulated flexible bars or rigid bars > [page I-43](#).

Designing connections  $\leq 630$  A

ComPacT circuit breakers NSXm up to 160

Copper cable

## Electrical characteristics

## ComPacT NSXm up to 160

Copper cable, withstand temperature = 105°C

| Devices                        |                                   | Permissible current (A)                    |       |       |       |       |       |
|--------------------------------|-----------------------------------|--------------------------------------------|-------|-------|-------|-------|-------|
|                                |                                   | Ambient temperature around the switchboard |       |       |       |       |       |
|                                |                                   | 25 °C                                      | 30 °C | 35 °C | 40 °C | 45 °C | 50 °C |
| <b>IP <math>\leq</math> 31</b> |                                   |                                            |       |       |       |       |       |
| NSXm100                        | Size per phase (mm <sup>2</sup> ) | 50                                         | 50    | 50    | 50    | 50    | 50    |
|                                | I <sub>nc</sub> (A)               | 100                                        | 100   | 96    | 94    | 90    | 87    |
| NSXm125                        | Size per phase (mm <sup>2</sup> ) | 70                                         | 70    | 70    | 70    | 70    | 70    |
|                                | I <sub>nc</sub> (A)               | 125                                        | 125   | 120   | 117   | 113   | 109   |
| NSXm160                        | Size per phase (mm <sup>2</sup> ) | 95                                         | 95    | 95    | 95    | 95    | 95    |
|                                | I <sub>nc</sub> (A)               | 160                                        | 155   | 149   | 144   | 139   | 133   |
| NSXm 100 ELCB                  | Size per phase (mm <sup>2</sup> ) | 50                                         | 50    | 50    | 50    | 50    | 50    |
|                                | I <sub>nc</sub> (A)               | 100                                        | 100   | 100   | 100   | 96    | 93    |
| NSXm 160 ELCB                  | Size per phase (mm <sup>2</sup> ) | 95                                         | 95    | 95    | 95    | 95    | 95    |
|                                | I <sub>nc</sub> (A)               | 160                                        | 155   | 150   | 145   | 140   | 135   |
| <b>IP &gt; 31</b>              |                                   |                                            |       |       |       |       |       |
| NSXm100                        | Size per phase (mm <sup>2</sup> ) | 50                                         | 50    | 50    | 50    | 50    | 50    |
|                                | I <sub>nc</sub> (A)               | 100                                        | 100   | 96    | 94    | 90    | 87    |
| NSXm125                        | Size per phase (mm <sup>2</sup> ) | 70                                         | 70    | 70    | 70    | 70    | 70    |
|                                | I <sub>nc</sub> (A)               | 125                                        | 120   | 117   | 113   | 109   | 104   |
| NSXm160                        | Size per phase (mm <sup>2</sup> ) | 95                                         | 95    | 95    | 95    | 95    | 95    |
|                                | I <sub>nc</sub> (A)               | 160                                        | 155   | 149   | 144   | 139   | 133   |
| NSXm 100 ELCB                  | Size per phase (mm <sup>2</sup> ) | 50                                         | 50    | 50    | 50    | 50    | 50    |
|                                | I <sub>nc</sub> (A)               | 100                                        | 100   | 100   | 100   | 96    | 93    |
| NSXm 160 ELCB                  | Size per phase (mm <sup>2</sup> ) | 95                                         | 95    | 95    | 95    | 95    | 95    |
|                                | I <sub>nc</sub> (A)               | 160                                        | 155   | 150   | 145   | 140   | 135   |

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

# Designing cable connections


## Tubular lugs

### Electrical characteristics

#### Tubular lugs for incoming connection blocks

Maximum size of lugs for connection to the different incoming connection blocks.

|                                                                                                                        | Standard Cu lugs    | Narrow Cu lugs      | Narrow bimetal lugs |
|------------------------------------------------------------------------------------------------------------------------|---------------------|---------------------|---------------------|
| Incoming connection block for ComPacT NSX-INS-INV250 supplied via the top or the bottom, cat. no. LVS04066 et LVS04067 | 150 mm <sup>2</sup> | 240 mm <sup>2</sup> | 185 mm <sup>2</sup> |
| In-duct incoming connection block for ComPacT NSX630 supplied via the top or the bottom cat. no. LVS04076              | 240 mm <sup>2</sup> | 300 mm <sup>2</sup> | 300 mm <sup>2</sup> |



#### Narrow bimetal lugs

##### Cat. no. selection

| Cat. no.                            | Cable size (mm <sup>2</sup> ) | Quantity |
|-------------------------------------|-------------------------------|----------|
| <b>Lugs for aluminium cable (1)</b> |                               |          |
| 29504                               | 150                           | 3        |
| 29505                               | 150                           | 4        |
| 29506                               | 185                           | 3        |
| 29507                               | 185                           | 4        |
| 32504                               | 240                           | 3        |
| 32505                               | 240                           | 4        |
| 32506                               | 300                           | 3        |
| 32507                               | 300                           | 4        |

#### Customer connection of devices ≥ 630 A

Maximum size and number of cables for connection to terminal extension bars (according to busbar drawing supplied) for customer connection of ComPacT NSX and MasterPact MTZ1 /MTZ2 and NT devices.

|                                  | Cable size (mm <sup>2</sup> ) | Quantity |
|----------------------------------|-------------------------------|----------|
| <b>Size and number of cables</b> |                               |          |
| Copper lugs                      | 300                           | 12       |
| Bimetal lugs                     | 240                           | 12       |

(1) Supplied with 2 or 3 interphase barriers.

## Designing customer connections

Prefabricated connections for ComPacT NS630b to NS1600

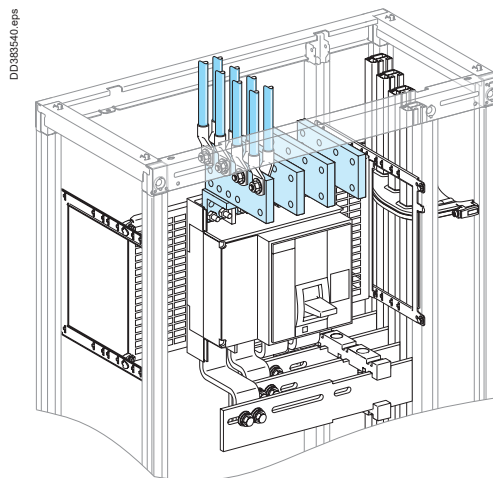
### Electrical characteristics

#### ComPacT NS630b to NS1600

Vertical mounting

Front or rear connection

Incoming via top or bottom



Using the data below, it is possible to determine the permissible current for a prefabricated connection between a vertical ComPacT NS630b/NS1600, fixed or withdrawable, and Linergy busbars depending on the ambient temperature around the switchboard and the IP value.

#### Fixed

##### Prefabricated connections

| Device and cat. no.                 | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-------------------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                                     | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                                     | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                                     | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| NS630b 3P cat. no. <b>33642</b>     | 630                                        | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | ■       |
| 4P cat. no. <b>33643</b>            |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS800 3P cat. no. <b>33642</b>      | 800                                        | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | ■       |
| 4P cat. no. <b>33643</b>            |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1000 3P cat. no. <b>33642</b>     | 1000                                       | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | ■       |
| 4P cat. no. <b>33643</b>            |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1250 3P réf. <b>33642 + 33644</b> | 1250                                       | 1250    | 1250    | 1250    | 1250    | 1250    | 1250    | 1200    | 1250    | 1150    | 1200    | ■       |
| 4P réf. <b>33643 + 33645</b>        |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1600 3P réf. <b>33642 + 33644</b> | 1600                                       | 1550    | 1600    | 1500    | 1550    | 1450    | 1500    | 1400    | 1450    | 1350    | 1400    | ■       |
| 4P réf. <b>33643 + 33645</b>        |                                            |         |         |         |         |         |         |         |         |         |         |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

#### Withdrawable

##### Prefabricated connections

| Device and cat. no.                 | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-------------------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                                     | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                                     | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                                     | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| NS630b 3P cat. no. <b>33642</b>     | 630                                        | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | ■       |
| 4P cat. no. <b>33643</b>            |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS800 3P cat. no. <b>33642</b>      | 800                                        | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | ■       |
| 4P cat. no. <b>33643</b>            |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1000 3P cat. no. <b>33642</b>     | 1000                                       | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | ■       |
| 4P cat. no. <b>33643</b>            |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1250 3P réf. <b>33642 + 33644</b> | 1250                                       | 1250    | 1250    | 1250    | 1250    | 1250    | 1250    | 1200    | 1250    | 1150    | 1200    | ■       |
| 4P réf. <b>33643 + 33645</b>        |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1600 3P réf. <b>33642 + 33644</b> | 1560                                       | 1480    | 1520    | 1430    | 1480    | 1380    | 1430    | 1330    | 1380    | 1280    | 1330    | ■       |
| 4P réf. <b>33643 + 33645</b>        |                                            |         |         |         |         |         |         |         |         |         |         |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

# Designing customer connections

## Prefabricated connections for MasterPacT 06-16

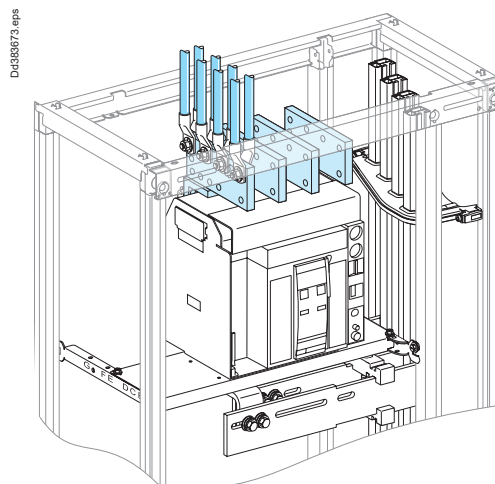
### Electrical characteristics

#### MasterPacT MTZ106 to 16

Vertical mounting

Front or rear connection

Incoming via top or bottom



Using the data below, it is possible to determine the permissible current for a prefabricated connection between a vertical MasterPacT MTZ1 06/16, fixed or drawout, and Linergy busbars depending on the ambient temperature around the switchboard and the IP value.

#### Fixed

##### Prefabricated connections

| Device and cat. no. |                              | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------|------------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                     |                              | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                     |                              | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                     |                              | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| NT06                | 3P cat. no. <b>33642</b>     | 630                                        | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | ■       |
|                     | 4P cat. no. <b>33643</b>     |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT08                | 3P cat. no. <b>33642</b>     | 800                                        | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | ■       |
|                     | 4P cat. no. <b>33643</b>     |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT10                | 3P cat. no. <b>33642</b>     | 1000                                       | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | ■       |
|                     | 4P cat. no. <b>33643</b>     |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT12                | 3P réf. <b>33642 + 33644</b> | 1250                                       | 1250    | 1250    | 1250    | 1250    | 1250    | 1250    | 1200    | 1250    | 1150    | 1200    | ■       |
|                     | 4P réf. <b>33643 + 33645</b> |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT16                | 3P réf. <b>33642 + 33644</b> | 1600                                       | 1570    | 1600    | 1520    | 1570    | 1470    | 1520    | 1420    | 1470    | 1370    | 1420    | ■       |
|                     | 4P réf. <b>33643 + 33645</b> |                                            |         |         |         |         |         |         |         |         |         |         |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

#### Withdrawable

##### Prefabricated connections

| Device and cat. no. |                              | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------|------------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                     |                              | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                     |                              | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                     |                              | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| NT06                | 3P cat. no. <b>33642</b>     | 630                                        | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | ■       |
|                     | 4P cat. no. <b>33643</b>     |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT08                | 3P cat. no. <b>33642</b>     | 800                                        | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | ■       |
|                     | 4P cat. no. <b>33643</b>     |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT10                | 3P cat. no. <b>33642</b>     | 1000                                       | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | ■       |
|                     | 4P cat. no. <b>33643</b>     |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT12                | 3P réf. <b>33642 + 33644</b> | 1250                                       | 1250    | 1250    | 1250    | 1250    | 1250    | 1250    | 1200    | 1250    | 1150    | 1200    | ■       |
|                     | 4P réf. <b>33643 + 33645</b> |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NT16                | 3P réf. <b>33642 + 33644</b> | 1560                                       | 1480    | 1520    | 1430    | 1480    | 1380    | 1430    | 1330    | 1380    | 1280    | 1330    | ■       |
|                     | 4P réf. <b>33643 + 33645</b> |                                            |         |         |         |         |         |         |         |         |         |         |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

## Designing customer connections

### Connection transfer assembly for fixed ComPacT NS630b to NS1000

#### Electrical characteristics

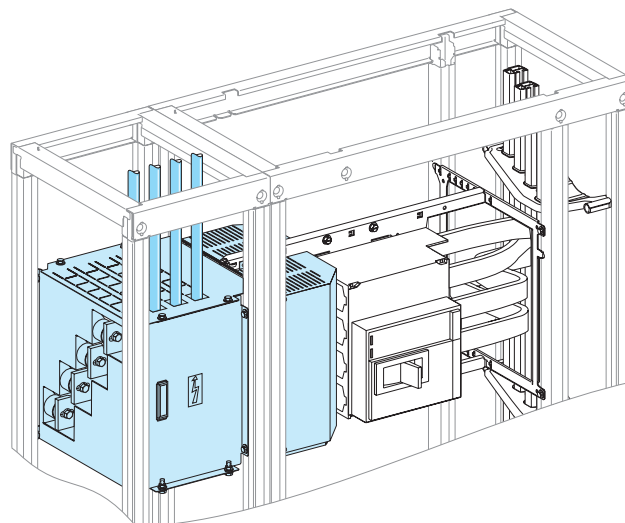
#### ComPacT NS630b to NS1000, fixed

Horizontal mounting

Front or rear connection

Installation on the left or right

Dd88541 eps



Using the data below, it is possible to determine the permissible current for a prefabricated connection between a horizontal, fixed ComPacT NS630b/NS1000 and Linergy busbars depending on the ambient temperature around the switchboard and the IP value.

#### Connection transfer assemblies

| Device and cat. no. |                             | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------|-----------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                     |                             | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                     |                             | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
|                     |                             | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| NS630b              | 3P cat. no. <b>LVS04483</b> | 630                                        | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | 630     | ■       |
|                     | 4P cat. no. <b>LVS04484</b> |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS800               | 3P cat. no. <b>LVS04483</b> | 800                                        | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | 800     | ■       |
|                     | 4P cat. no. <b>LVS04484</b> |                                            |         |         |         |         |         |         |         |         |         |         |         |
| NS1000              | 3P cat. no. <b>LVS04483</b> | 1000                                       | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | 1000    | ■       |
|                     | 4P cat. no. <b>LVS04484</b> |                                            |         |         |         |         |         |         |         |         |         |         |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.



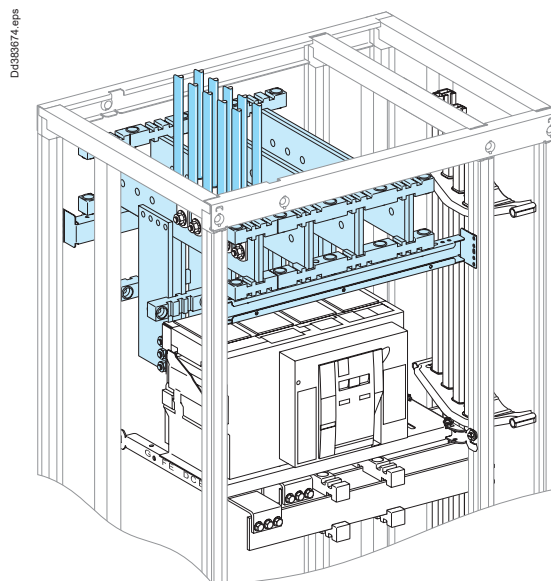
## Designing customer connections

Fixed MasterPacT 08-16

## Electrical characteristics

MasterPacT MTZ208 to 16  
Fixed

Vertical mounting  
Front or rear connection  
Incoming via top or bottom  
Busbar drawings supplied by  
Schneider Electric



Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making a front or rear customer connection for a vertical, fixed MasterPacT MTZ1 06/16, taking into account the ambient temperature around the switchboard and the IP value.

Connection to be made according to the busbar drawings supplied.

For connection cable cross-sections and quantities > [page I-46](#).

## Customer connection

Flat bars, 5 mm thick

| Device |                | Permissible current (A)                    |           |           |           |           |           |           |           |           |           |           |         |
|--------|----------------|--------------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|
|        |                | Ambient temperature around the switchboard |           |           |           |           |           |           |           |           |           |           |         |
|        |                | 25 °C                                      |           | 30 °C     |           | 35 °C     |           | 40 °C     |           | 45 °C     |           | 50 °C     |         |
|        |                | IP ≤ 31                                    | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31 |
| NW08   | Size per phase | 2b 60 x 5                                  | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | ■       |
|        | I (A)          | 800                                        | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       |         |
| NW10   | Size per phase | 2b 60 x 5                                  | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | ■       |
|        | I (A)          | 1000                                       | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      |         |
| NW12   | Size per phase | 2b 80 x 5                                  | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|        | I (A)          | 1250                                       | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      | 1250      |         |
| NW16   | Size per phase | 2b 80 x 5                                  | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|        | I (A)          | 1600                                       | 1600      | 1600      | 1570      | 1600      | 1520      | 1570      | 1470      | 1520      | 1420      | 1470      |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

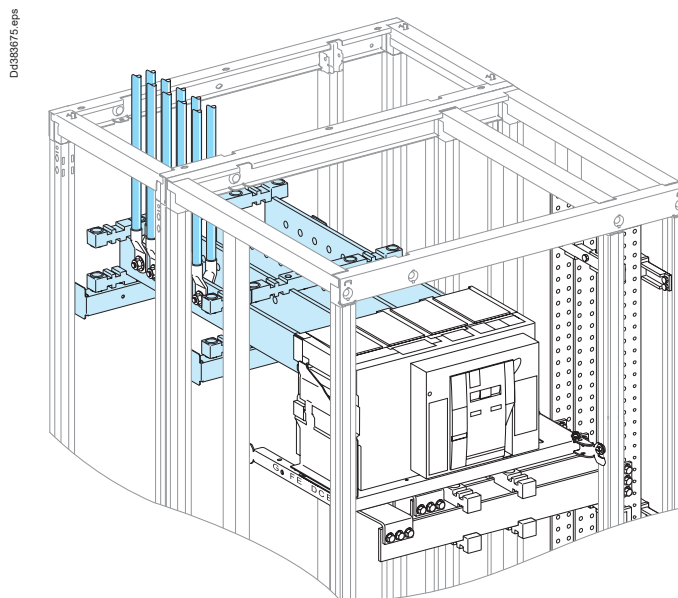
## Designing customer connections

Fixed MasterPacT 08-40

## Electrical characteristics

MasterPacT MTZ208 to 40  
Fixed

Vertical mounting  
Front or rear connection  
Incoming via top or bottom  
Busbar drawings supplied by  
Schneider Electric



## Customer connection

Flat bars, 10 mm thick

| Device |                | Permissible current (A)                    |             |             |             |             |             |             |             |             |             |             |         |
|--------|----------------|--------------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|---------|
|        |                | Ambient temperature around the switchboard |             |             |             |             |             |             |             |             |             |             |         |
|        |                | 25 °C                                      |             | 30 °C       |             | 35 °C       |             | 40 °C       |             | 45 °C       |             | 50 °C       |         |
|        |                | IP ≤ 31                                    | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31 |
| NW08   | Size per phase | 1b 60 x 10                                 | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | ■       |
|        | I (A)          | 800                                        | 800         | 800         | 800         | 800         | 800         | 800         | 800         | 800         | 800         | 800         |         |
| NW10   | Size per phase | 1b 60 x 10                                 | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | ■       |
|        | I (A)          | 1000                                       | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        |         |
| NW12   | Size per phase | 1b 60 x 10                                 | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | ■       |
|        | I (A)          | 1250                                       | 1250        | 1250        | 1250        | 1250        | 1250        | 1250        | 1250        | 1250        | 1250        | 1250        |         |
| NW16   | Size per phase | 1b 80 x 10                                 | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | ■       |
|        | I (A)          | 1600                                       | 1600        | 1600        | 1570        | 1600        | 1520        | 1570        | 1470        | 1520        | 1420        | 1470        |         |
| NW20   | Size per phase | 2b 80 x 10                                 | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | ■       |
|        | I (A)          | 2000                                       | 2000        | 2000        | 2000        | 2000        | 2000        | 2000        | 1950        | 2000        | 1900        | 1950        |         |
| NW25   | Size per phase | 2b 100 x 10                                | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | ■       |
|        | I (A)          | 2500                                       | 2500        | 2500        | 2500        | 2500        | 2460        | 2500        | 2380        | 2500        | 2300        | 2460        |         |
| NW32   | Size per phase | 2b 120 x 10                                | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | ■       |
|        | I (A)          | 3200                                       | 3000        | 3170        | 2910        | 3080        | 2820        | 3000        | 2730        | 2910        | 2630        | 2820        |         |
| NW40   | Size per phase | (2)                                        | (2)         | (2)         | (2)         | (2)         | (2)         | (2)         | (2)         | (2)         | (2)         | (2)         | ■       |
|        | I (A) (1)      |                                            |             |             |             |             |             |             |             |             |             |             |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Canalis connection

For Canalis connections, apply the appropriate derating coefficient K.

| Device                 | NW08 | NW10 | NW12 | NW16 | NW20 | NW25 | NW32 |
|------------------------|------|------|------|------|------|------|------|
| Derating coefficient K | 1    | 1    | 1    | 0,98 | 0,98 | 0,97 | 0,97 |

(1) For NW40 IP &gt;31, performances realized with forced ventilation.

(2) Contact Schneider Electric for 4000 A dedicated cubicle.

Note: the values indicated above have been validated for PrismaSeT P Active switchboards.

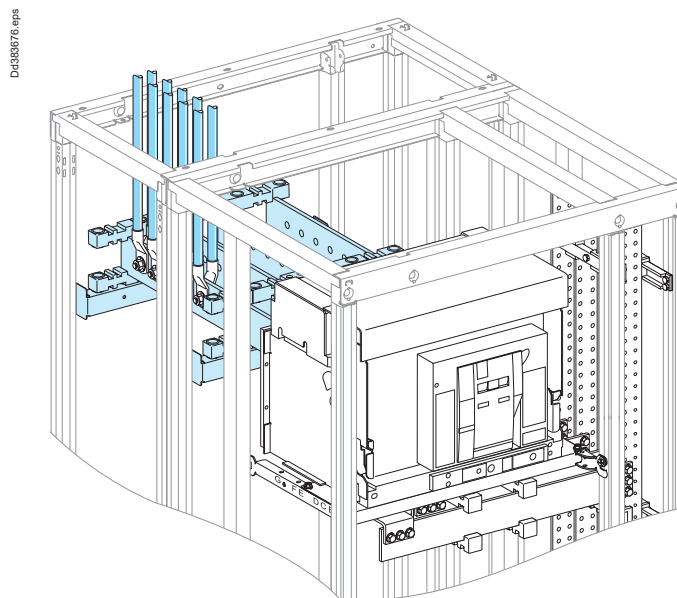
## Designing customer connections

Drawout MasterPacT 08-16

## Electrical characteristics

MasterPacT MTZ208 to 16  
Drawout

Vertical mounting  
Front or rear connection  
Incoming via top or bottom  
Busbar drawings supplied by  
Schneider Electric



Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making a front or rear customer connections to busbars for a vertical, drawout MasterPacT MTZ1 08/16, taking into account the ambient temperature around the switchboard and the IP value.  
Connection to be made according to the busbar drawings supplied.  
For connection cable cross-sections and quantities > [page I-46](#).

## Customer connection

Flat bars, 5 mm thick

| Device |                | Permissible current (A)                    |           |           |           |           |           |           |           |           |           |           |         |
|--------|----------------|--------------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|
|        |                | Ambient temperature around the switchboard |           |           |           |           |           |           |           |           |           |           |         |
|        |                | 25 °C                                      |           | 30 °C     |           | 35 °C     |           | 40 °C     |           | 45 °C     |           | 50 °C     |         |
|        |                | IP ≤ 31                                    | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31 |
| NW08   | Size per phase | 2b 60 x 5                                  | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | ■       |
|        | I (A)          | 800                                        | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       |         |
| NW10   | Size per phase | 2b 60 x 5                                  | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | 2b 60 x 5 | ■       |
|        | I (A)          | 1000                                       | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      |         |
| NW12   | Size per phase | 2b 80 x 5                                  | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|        | I (A)          | 1250                                       | 1250      | 1250      | 1250      | 1250      | 1230      | 1250      | 1200      | 1230      | 1160      | 1200      |         |
| NW16   | Size per phase | 2b 80 x 5                                  | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | 2b 80 x 5 | ■       |
|        | I (A)          | 1560                                       | 1480      | 1520      | 1430      | 1480      | 1380      | 1430      | 1330      | 1380      | 1280      | 1330      |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.


## Designing customer connections

MasterPacT 08-40 withdrawable

## Electrical characteristics

MasterPact MTZ208 to 40  
Drawout

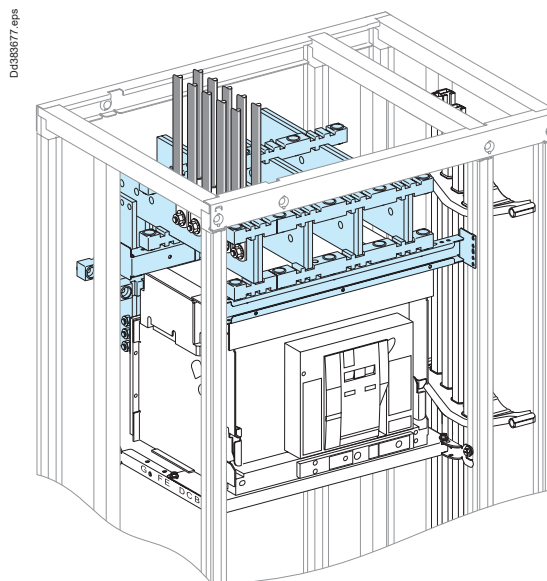Vertical mounting  
Front or rear connection  
Incoming via top or bottom  
Busbar drawings supplied by  
Schneider Electric



## Customer connection

Flat bars, 10 mm thick

| Device |                | Permissible current (A)                    |             |             |             |             |             |             |             |             |             |             |         |
|--------|----------------|--------------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|---------|
|        |                | Ambient temperature around the switchboard |             |             |             |             |             |             |             |             |             |             |         |
|        |                | 25 °C                                      |             | 30 °C       |             | 35 °C       |             | 40 °C       |             | 45 °C       |             | 50 °C       |         |
|        |                | IP ≤ 31                                    | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31 |
| NW08   | Size per phase | 1b 60 x 10                                 | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | ■       |
|        | I (A)          | 800                                        | 800         | 800         | 800         | 800         | 800         | 800         | 800         | 800         | 800         | 800         |         |
| NW10   | Size per phase | 1b 60 x 10                                 | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | ■       |
|        | I (A)          | 1000                                       | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        |         |
| NW12   | Size per phase | 1b 60 x 10                                 | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | 1b 60 x 10  | ■       |
|        | I (A)          | 1250                                       | 1250        | 1250        | 1210        | 1250        | 1180        | 1210        | 1140        | 1180        | 1100        | 1140        |         |
| NW16   | Size per phase | 1b 80 x 10                                 | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | ■       |
|        | I (A)          | 1560                                       | 1480        | 1520        | 1430        | 1480        | 1380        | 1430        | 1330        | 1380        | 1280        | 1330        |         |
| NW20   | Size per phase | 2b 80 x 10                                 | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | ■       |
|        | I (A)          | 2000                                       | 2000        | 2000        | 1950        | 2000        | 1900        | 1950        | 1830        | 1900        | 1760        | 1830        |         |
| NW25   | Size per phase | 2b 100 x 10                                | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | ■       |
|        | I (A)          | 2470                                       | 2280        | 2410        | 2210        | 2350        | 2140        | 2280        | 2070        | 2210        | 2000        | 2140        |         |
| NW32   | Size per phase | 2b 120 x 10                                | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | ■       |
|        | I (A)          | 2960                                       | 2730        | 2890        | 2630        | 2820        | 2530        | 2730        | 2450        | 2630        | 2370        | 2530        |         |
| NW40   | Size per phase | (2)                                        | (2)         | (2)         | (2)         | (2)         | (2)         | (2)         | (2)         | (2)         | (2)         | (2)         | ■       |
|        | I (A) (1)      |                                            |             |             |             |             |             |             |             |             |             |             |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Canalis connection

For Canalis connections, apply the appropriate derating coefficient K.

| Device                 | NW08 | NW10 | NW12 | NW16 | NW20 | NW25 | NW32 |
|------------------------|------|------|------|------|------|------|------|
| Derating coefficient K | 1    | 1    | 1    | 0,98 | 0,98 | 0,97 | 0,97 |

(1) For NW40 IP >31, performances realized with forced ventilation.

(2) Contact Schneider Electric for 4000 A dedicated cubicle.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

## Designing customer connections

Fixed MasterPacT 06-16

## Electrical characteristics

## MasterPacT MTZ106 to 16

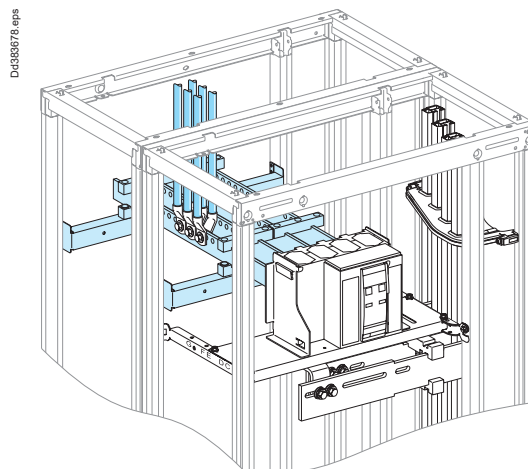
## Fixed

## Rear connection

Incoming via top or bottom

Busbar drawings supplied by

Schneider Electric



Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making a front or rear customer connections to busbars for a vertical, fixed MasterPacT MTZ1 06/16, taking into account the ambient temperature around the switchboard and the IP value.

Connection to be made according to the busbar drawings supplied.

For connection cable cross-sections and quantities > [page I-46](#).

## Customer connection

## Flat bars, 5 mm thick

| Device |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|--------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|        |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|        |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|        |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NT06   | Size per phase | 1b 60 x 5                                  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | ■       |
|        | I (A)          | 630                                        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        |         |
| NT08   | Size per phase | 1b 80 x 5                                  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | ■       |
|        | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        |         |
| NT10   | Size per phase | 2b 50 x 5                                  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | ■       |
|        | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       |         |
| NT12   | Size per phase | 2b 80 x 5                                  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | ■       |
|        | I (A)          | 1250                                       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1200       | 1250       |         |
| NT16   | Size per phase | 2b 100 x 5                                 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | ■       |
|        | I (A)          | 1600                                       | 1570       | 1600       | 1520       | 1570       | 1470       | 1520       | 1420       | 1470       | 1370       | 1420       |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Customer connection

## Flat bars, 10 mm thick

| Device |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|--------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|        |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|        |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|        |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NT06   | Size per phase | 1b 50 x 10                                 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | ■       |
|        | I (A)          | 630                                        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        |         |
| NT08   | Size per phase | 1b 50 x 10                                 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | ■       |
|        | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        |         |
| NT10   | Size per phase | 1b 50 x 10                                 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | ■       |
|        | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       |         |
| NT12   | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|        | I (A)          | 1250                                       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1180       | 1230       |         |
| NT16   | Size per phase | 1b100 x 10                                 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | ■       |
|        | I (A)          | 1600                                       | 1570       | 1600       | 1520       | 1570       | 1470       | 1520       | 1420       | 1470       | 1370       | 1420       |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Canalis connection

For Canalis connections, apply the appropriate derating coefficient K.

| Device                 | NT06b | NT08 | NT10 | NT12 | NT16 |
|------------------------|-------|------|------|------|------|
| Derating coefficient K | 1     | 1    | 1    | 1    | 0,98 |

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

## Designing customer connections

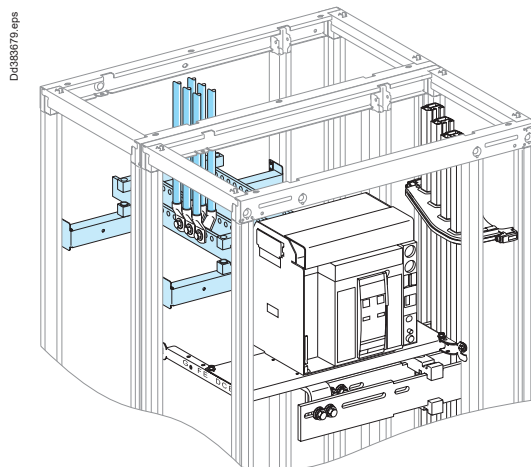
## Drawout MasterPacT 06-16

## Electrical characteristics

## MasterPacT MTZ106 to 16

## Rear connection

## Incoming via top or bottom

Busbar drawings supplied by  
Schneider Electric

Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making a customer connections to busbars for a vertical, drawout MasterPacT MTZ1 06/16, taking into account the ambient temperature around the switchboard and the IP value.

Connection to be made according to the busbar drawings supplied.

For connection cable cross-sections and quantities > [page I-46](#).

## Customer connection

## Flat bars, 5 mm thick

| Device |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|--------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|        |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|        |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|        |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NT06   | Size per phase | 1b 60 x 5                                  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | ■       |
|        | I (A)          | 630                                        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        |         |
| NT08   | Size per phase | 1b 80 x 5                                  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | ■       |
|        | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        |         |
| NT10   | Size per phase | 2b 50 x 5                                  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | ■       |
|        | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 960        | 1000       |         |
| NT12   | Size per phase | 2b 80 x 5                                  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | ■       |
|        | I (A)          | 1250                                       | 1250       | 1250       | 1250       | 1250       | 1230       | 1250       | 1180       | 1230       | 1130       | 1180       |         |
| NT16   | Size per phase | 2b 100 x 5                                 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | ■       |
|        | I (A)          | 1560                                       | 1430       | 1520       | 1430       | 1480       | 1380       | 1430       | 1330       | 1380       | 1280       | 1330       |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Customer connection

## Flat bars, 10 mm thick

| Device |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|--------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|        |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|        |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|        |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NT06   | Size per phase | 1b 50 x 10                                 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | ■       |
|        | I (A)          | 630                                        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        |         |
| NT08   | Size per phase | 1b 50 x 10                                 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | ■       |
|        | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        |         |
| NT10   | Size per phase | 1b 50 x 10                                 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | ■       |
|        | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 960        | 1000       |         |
| NT12   | Size per phase | 1b 80 x 10                                 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | 1b 80 x 10 | ■       |
|        | I (A)          | 1250                                       | 1250       | 1250       | 1250       | 1250       | 1210       | 1250       | 1160       | 1210       | 1110       | 1160       |         |
| NT16   | Size per phase | 1b100 x 10                                 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | 1b100 x 10 | ■       |
|        | I (A)          | 1560                                       | 1430       | 1520       | 1430       | 1480       | 1380       | 1430       | 1330       | 1380       | 1280       | 1330       |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Canalis connection

For Canalis connections, apply the appropriate derating coefficient K.

| Device                 | NT06 | NT08 | NT10 | NT12 | NT16 |
|------------------------|------|------|------|------|------|
| Derating coefficient K | 1    | 1    | 1    | 1    | 0,98 |

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

Version : 11 - 03/10/2022

160E9500

Life Is On

Schneider  
Electric

I-55

## Designing customer connections

Fixed ComPacT NS1600b to NS3200

## Electrical characteristics


## ComPacT NS1600b/3200 fixed

Front or rear connection

Incoming via top or bottom

Busbar drawings supplied by  
Schneider Electric

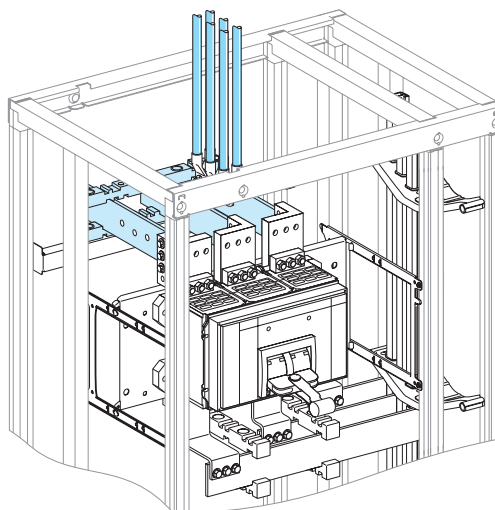Dd383542.eps



Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making a front or rear customer connections to busbars for a vertical, fixed ComPacT NS1600b/NS3200, taking into account the ambient temperature around the switchboard and the IP value.

Connection to be made according to the busbar drawings supplied.

For connection cable cross-sections and quantities > [page I-46](#).

## Customer connection

Flat bars, 10 mm thick

| Device  |                | Permissible current (A)                    |             |             |             |             |             |             |             |             |             |             |         |
|---------|----------------|--------------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|---------|
|         |                | Ambient temperature around the switchboard |             |             |             |             |             |             |             |             |             |             |         |
|         |                | 25 °C                                      |             | 30 °C       |             | 35 °C       |             | 40 °C       |             | 45 °C       |             | 50 °C       |         |
|         |                | IP ≤ 31                                    | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31 |
| NS1600b | Size per phase | 1b 80 x 10                                 | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | ■       |
|         | I (A)          | 1560                                       | 1480        | 1520        | 1430        | 1480        | 1380        | 1430        | 1330        | 1380        | 1280        | 1330        |         |
| NS2000  | Size per phase | 2b 80 x 10                                 | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | 2b 80 x 10  | ■       |
|         | I (A)          | 2000                                       | 2000        | 2000        | 1950        | 2000        | 1900        | 1950        | 1830        | 1900        | 1760        | 1830        |         |
| NS2500  | Size per phase | 2b 100 x 10                                | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | 2b 100 x 10 | ■       |
|         | I (A)          | 2470                                       | 2280        | 2410        | 2210        | 2350        | 2140        | 2280        | 2070        | 2210        | 2000        | 2140        |         |
| NS3200  | Size per phase | 2b 120 x 10                                | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | 2b 120 x 10 | ■       |
|         | I (A)          | 2860                                       | 2630        | 2790        | 2530        | 2720        | 2430        | 2630        | 2350        | 2530        | 2270        | 2430        |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.



## Designing customer connections

## Fixed ComPacT NS630b to NS1600

## Electrical characteristics

## ComPacT NS630b to NS1600

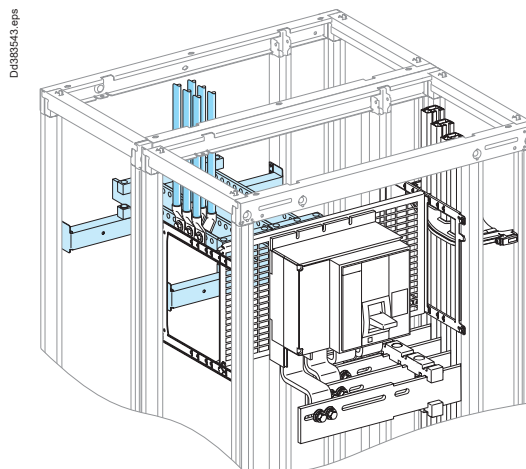
## Fixed

## Rear connection

Incoming via top or bottom

Busbar drawings supplied by

Schneider Electric



Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making a rear customer connection for a vertical, fixed ComPacT NS630b/NS1600, taking into account the ambient temperature around the switchboard and the IP value.

Connection to be made according to the busbar drawings supplied.

For connection cable cross-sections and quantities > [page I-46](#).

## Customer connection

## Flat bars, 5 mm thick

| Device |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|--------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|        |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|        |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|        |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NS630b | Size per phase | 1b 60 x 5                                  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | ■       |
|        | I (A)          | 630                                        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        |         |
| NS800  | Size per phase | 1b 80 x 5                                  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | ■       |
|        | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        |         |
| NS1000 | Size per phase | 2b 50 x 5                                  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | ■       |
|        | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 970        | 1000       |         |
| NS1250 | Size per phase | 2b 80 x 5                                  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | ■       |
|        | I (A)          | 1250                                       | 1250       | 1250       | 1250       | 1250       | 1250       | 1250       | 1200       | 1250       | 1150       | 1200       |         |
| NS1600 | Size per phase | 2b 100 x 5                                 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | ■       |
|        | I (A)          | 1600                                       | 1550       | 1600       | 1500       | 1550       | 1450       | 1500       | 1400       | 1450       | 1350       | 1400       |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Customer connection

## Flat bars, 10 mm thick

| Device |                | Permissible current (A)                    |             |             |             |             |             |             |             |             |             |             |         |
|--------|----------------|--------------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|---------|
|        |                | Ambient temperature around the switchboard |             |             |             |             |             |             |             |             |             |             |         |
|        |                | 25 °C                                      |             | 30 °C       |             | 35 °C       |             | 40 °C       |             | 45 °C       |             | 50 °C       |         |
|        |                | IP ≤ 31                                    | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31 |
| NS630b | Size per phase | 1b 50 x 10                                 | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | ■       |
|        | I (A)          | 630                                        | 630         | 630         | 630         | 630         | 630         | 630         | 630         | 630         | 630         | 630         |         |
| NS800  | Size per phase | 1b 50 x 10                                 | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | ■       |
|        | I (A)          | 800                                        | 800         | 800         | 800         | 800         | 800         | 800         | 800         | 800         | 800         | 800         |         |
| NS1000 | Size per phase | 1b 50 x 10                                 | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | ■       |
|        | I (A)          | 1000                                       | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        | 970         | 1000        |         |
| NS1250 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | ■       |
|        | I (A)          | 1250                                       | 1250        | 1250        | 1250        | 1250        | 1250        | 1180        | 1230        | 1250        | 1130        | 1180        |         |
| NS1600 | Size per phase | 1b 100 x 10                                | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | ■       |
|        | I (A)          | 1600                                       | 1550        | 1600        | 1500        | 1550        | 1450        | 1500        | 1400        | 1450        | 1350        | 1400        |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Canalis connection

For Canalis connections, apply the appropriate derating coefficient K.

| Device                 | NS630b | NS800 | NS1000 | NS1250 | NS1600 |
|------------------------|--------|-------|--------|--------|--------|
| Derating coefficient K | 1      | 1     | 1      | 1      | 0,98   |

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

## Designing customer connections

## Withdrawable ComPacT NS630b to NS1600

## Electrical characteristics

## ComPacT NS630b to NS1600

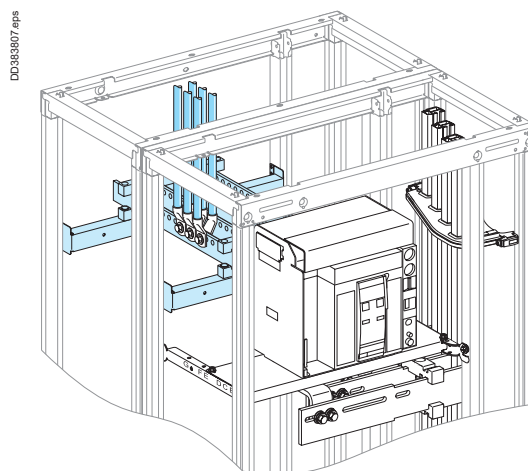
## Withdrawable

## Rear connection

## Incoming via top or bottom

## Busbar drawings supplied by

## Schneider Electric



Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making a rear customer connection for a vertical, withdrawable ComPacT NS630b/NS1600, taking into account the ambient temperature around the switchboard and the IP value.

Connection to be made according to the busbar drawings supplied.

For connection cable cross-sections and quantities > [page I-46](#).

## Customer connection

## Flat bars, 5 mm thick

| Device |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |         |
|--------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
|        |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |         |
|        |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |         |
|        |                | IP ≤ 31                                    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31    | IP ≤ 31    | IP > 31 |
| NS630b | Size per phase | 1b 60 x 5                                  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | 1b 60 x 5  | ■       |
|        | I (A)          | 630                                        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        |         |
| NS800  | Size per phase | 1b 80 x 5                                  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | 1b 80 x 5  | ■       |
|        | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        |         |
| NS1000 | Size per phase | 2b 50 x 5                                  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | 2b 50 x 5  | ■       |
|        | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 960        | 1000       |         |
| NS1250 | Size per phase | 2b 80 x 5                                  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | 2b 80 x 5  | ■       |
|        | I (A)          | 1250                                       | 1250       | 1250       | 1250       | 1250       | 1230       | 1250       | 1180       | 1230       | 1130       | 1180       |         |
| NS1600 | Size per phase | 2b 100 x 5                                 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | 2b 100 x 5 | ■       |
|        | I (A)          | 1560                                       | 1430       | 1520       | 1430       | 1480       | 1380       | 1430       | 1330       | 1380       | 1280       | 1330       |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Customer connection

## Flat bars, 10 mm thick

| Device |                | Permissible current (A)                    |             |             |             |             |             |             |             |             |             |             |         |
|--------|----------------|--------------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|---------|
|        |                | Ambient temperature around the switchboard |             |             |             |             |             |             |             |             |             |             |         |
|        |                | 25 °C                                      |             | 30 °C       |             | 35 °C       |             | 40 °C       |             | 45 °C       |             | 50 °C       |         |
|        |                | IP ≤ 31                                    | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31     | IP ≤ 31     | IP > 31 |
| NS630b | Size per phase | 1b 50 x 10                                 | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | ■       |
|        | I (A)          | 630                                        | 630         | 630         | 630         | 630         | 630         | 630         | 630         | 630         | 630         | 630         |         |
| NS800  | Size per phase | 1b 50 x 10                                 | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | ■       |
|        | I (A)          | 800                                        | 800         | 800         | 800         | 800         | 800         | 800         | 800         | 800         | 800         | 800         |         |
| NS1000 | Size per phase | 1b 50 x 10                                 | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | 1b 50 x 10  | ■       |
|        | I (A)          | 1000                                       | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        | 1000        | 960         | 1000        |         |
| NS1250 | Size per phase | 1b 80 x 10                                 | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | 1b 80 x 10  | ■       |
|        | I (A)          | 1250                                       | 1250        | 1250        | 1250        | 1250        | 1210        | 1250        | 1160        | 1210        | 1110        | 1160        |         |
| NS1600 | Size per phase | 1b 100 x 10                                | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | 1b 100 x 10 | ■       |
|        | I (A)          | 1560                                       | 1430        | 1520        | 1430        | 1480        | 1380        | 1430        | 1330        | 1380        | 1280        | 1330        |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Canalis connection

For Canalis connections, apply the appropriate derating coefficient K.

| Device                 | NS630b | NS800 | NS1000 | NS1250 | NS1600 |
|------------------------|--------|-------|--------|--------|--------|
| Derating coefficient K | 1      | 1     | 1      | 1      | 0,98   |

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

## Designing customer connections

## Fixed ComPacT NS630b to NS1000 Horizontal mounting

## Electrical characteristics

## ComPacT NS630b to NS1000


Horizontal mounting

Front connection

Incoming via top or bottom

Installation on the left or right

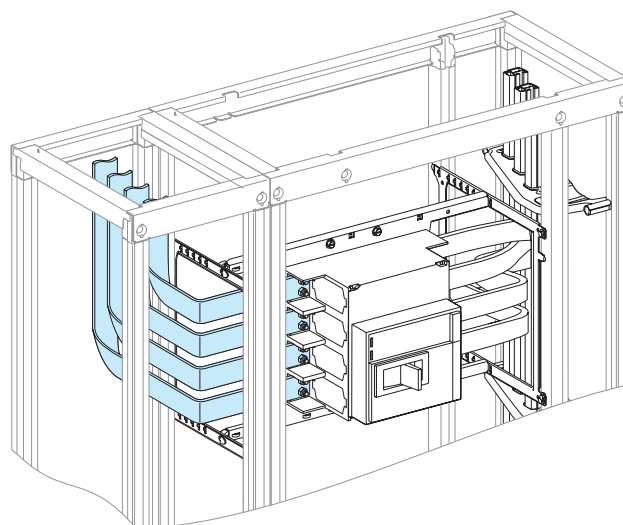Dd388445.eps



Using the data below, it is possible to determine the size of the copper bars and the maximum permissible currents when making the connections to busbars for a horizontal, fixed ComPacT NS630b/NS1600, taking into account the ambient temperature around the switchboard and the IP value.  
Connection to be made according to the busbar drawings supplied.

## Customer connection

## Flat bars, 5 mm thick

| Device |                | Permissible current (A)                    |           |           |           |           |           |           |           |           |           |           |         |
|--------|----------------|--------------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|
|        |                | Ambient temperature around the switchboard |           |           |           |           |           |           |           |           |           |           |         |
|        |                | 25 °C                                      |           | 30 °C     |           | 35 °C     |           | 40 °C     |           | 45 °C     |           | 50 °C     |         |
|        |                | IP ≤ 31                                    | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31   | IP ≤ 31   | IP > 31 |
| NS630b | Size per phase | 2b 50 x 5                                  | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | ■       |
|        | I (A)          | 630                                        | 630       | 630       | 630       | 630       | 630       | 630       | 630       | 630       | 630       | 630       |         |
| NS800  | Size per phase | 2b 50 x 5                                  | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | ■       |
|        | I (A)          | 800                                        | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       | 800       |         |
| NS1000 | Size per phase | 2b 50 x 5                                  | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | 2b 50 x 5 | ■       |
|        | I (A)          | 1000                                       | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      | 1000      |         |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Flat bars, 10 mm thick

| Device |                | Permissible current (A)                    |            |            |            |            |            |            |            |            |            |            |   |
|--------|----------------|--------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---|
|        |                | Ambient temperature around the switchboard |            |            |            |            |            |            |            |            |            |            |   |
|        |                | 25 °C                                      |            | 30 °C      |            | 35 °C      |            | 40 °C      |            | 45 °C      |            | 50 °C      |   |
|        |                | 1b 50 x 10                                 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 |   |
| NS630b | Size per phase | 1b 50 x 10                                 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | ■ |
|        | I (A)          | 630                                        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        | 630        |   |
| NS800  | Size per phase | 1b 50 x 10                                 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | ■ |
|        | I (A)          | 800                                        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        | 800        |   |
| NS1000 | Size per phase | 1b 50 x 10                                 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | 1b 50 x 10 | ■ |
|        | I (A)          | 1000                                       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       | 1000       |   |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

**Note:** the values indicated above have been validated for PrismaSeT P Active switchboards.

## Designing busbars

### Fupact GS, ISFT, ISFL Linergy BS busbars

#### Electrical characteristics

#### Permissible current and selection of horizontal Linergy BS busbars

The goal is to optimise busbar size according to the installation and operating criteria.

#### Horizontal Linergy BS busbars

##### Fupact GS/ISFT/ISFL

##### Linergy BS bars, 5 mm thick

| Type of bars              | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                           | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                           | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase            | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linergy BS bar, 60 x 5  | 800                                        | 750     | 760     | 700     | 710     | 650     | 660     | 600     | 610     | 550     | 560     | ■       |
| 1 Linergy BS bar, 80 x 5  | 1000                                       | 910     | 970     | 860     | 910     | 810     | 860     | 750     | 810     | 700     | 750     | ■       |
| 2 Linergy BS bars, 60 x 5 | 1400                                       | 1250    | 1320    | 1160    | 1250    | 1070    | 1160    | 980     | 1070    | 880     | 980     | ■       |
| 2 Linergy BS bars, 80 x 5 | 1700                                       | 1500    | 1600    | 1400    | 1500    | 1280    | 1400    | 1160    | 1280    | 1030    | 1160    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

##### Linergy BS bars, 10 mm thick

| Type of bars                | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-----------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                             | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                             | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase              | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linergy BS bar, 50 x 10   | 1150                                       | 1000    | 1080    | 930     | 1000    | 850     | 930     | 760     | 850     | 670     | 760     | ■       |
| 1 Linergy BS bar, 60 x 10   | 1400                                       | 1250    | 1320    | 1160    | 1250    | 1070    | 1160    | 980     | 1070    | 880     | 980     | ■       |
| 1 Linergy BS bar, 80 x 10   | 1700                                       | 1500    | 1600    | 1400    | 1500    | 1280    | 1400    | 1160    | 1280    | 1030    | 1160    | ■       |
| 2 Linergy BS bars, 50 x 10  | 1940                                       | 1690    | 1840    | 1560    | 1700    | 1420    | 1560    | 1270    | 1420    | 1100    | 1270    | ■       |
| 2 Linergy BS bars, 60 x 10  | 2170                                       | 1900    | 2040    | 1750    | 1900    | 1590    | 1750    | 1420    | 1590    | 1240    | 1420    | ■       |
| 2 Linergy BS bars, 80 x 10  | 2670                                       | 2340    | 2500    | 2160    | 2340    | 1970    | 2160    | 1770    | 1970    | 1550    | 1770    | ■       |
| 2 Linergy BS bars, 100 x 10 | 3120                                       | 2750    | 2930    | 2520    | 2750    | 2310    | 2520    | 2070    | 2310    | 1820    | 2070    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

#### Rear horizontal Linergy BS bars

##### Fupact ISFT/ISFL

##### Linergy BS bars, 10 mm thick

| Device                                          | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-------------------------------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                                                 | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                                                 | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase                                  | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| ISFT 160<br>1 bar Linergy BS<br>30 x 10         | 730                                        | 680     | 680     | 630     | 630     | 570     | 570     | 510     | 510     | 450     | 450     | ■       |
| ISFL 160<br>1 bar Linergy BS<br>60 x 10         | 1400                                       | 1250    | 1320    | 1160    | 1250    | 1070    | 1160    | 980     | 1070    | 880     | 980     | ■       |
| 1 bar Linergy BS<br>80 x 10                     | 1700                                       | 1500    | 1600    | 1400    | 1500    | 1280    | 1400    | 1160    | 1280    | 1030    | 1160    | ■       |
| ISFL 250/400/630<br>1 bar Linergy BS<br>80 x 10 | 1700                                       | 1500    | 1600    | 1400    | 1500    | 1280    | 1400    | 1160    | 1280    | 1030    | 1160    | ■       |
| 1 bar Linergy BS<br>100 x 10                    | 2050                                       | 1800    | 1930    | 1680    | 1800    | 1540    | 1680    | 1400    | 1540    | 1240    | 1400    | ■       |
| 1 bar Linergy BS<br>120 x 10                    | 2390                                       | 2100    | 2250    | 1950    | 2100    | 1800    | 1950    | 1630    | 1800    | 1440    | 1630    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Designing busbars

Fupact GS, ISFT Vertical Linergy LGYE, LGY busbars

### Electrical characteristics

#### Permissible current and selection of Linergy LGYE busbars

The goal is to optimise busbar size according to the installation and operating criteria.

#### Vertical Linergy LGYE busbars

##### Fupact GS/ISFT

| Type of bars       | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|--------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                    | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                    | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase     | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| Linerger LGYE 630  | 650                                        | 550     | 630     | 510     | 590     | 480     | 550     | 460     | 530     | 440     | 460     | ■       |
| Linerger LGYE 800  | 840                                        | 720     | 800     | 700     | 760     | 660     | 720     | 610     | 680     | 580     | 640     | ■       |
| Linerger LGYE 1000 | 1040                                       | 900     | 990     | 870     | 950     | 830     | 900     | 770     | 850     | 730     | 800     | ■       |
| Linerger LGYE 1250 | 1290                                       | 1120    | 1230    | 1080    | 1170    | 1030    | 1100    | 970     | 1050    | 910     | 980     | ■       |
| Linerger LGYE 1600 | 1580                                       | 1390    | 1480    | 1320    | 1390    | 1250    | 1320    | 1180    | 1250    | 1110    | 1180    | ■       |
| Linerger LGYE 2000 | 1900                                       | 1720    | 1820    | 1620    | 1720    | 1520    | 1620    | 1420    | 1520    | 1320    | 1420    | ■       |
| Linerger LGYE 2500 | 2290                                       | 1890    | 2190    | 1840    | 2070    | 1770    | 1960    | 1680    | 1880    | 1590    | 1780    | ■       |
| Linerger LGYE 3200 | 3060                                       | 2780    | 2920    | 2640    | 2780    | 2500    | 2640    | 2360    | 2500    | 2220    | 2360    | ■       |
| Linerger LGYE 4000 | 3320                                       | 3050    | 3240    | 2950    | 3140    | 2850    | 2970    | 2700    | 2800    | 2540    | 2650    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

#### Lateral Linergy LGY busbars

##### Fupact GS/ISFT

| Type of bars                 | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|------------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                              | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                              | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase               | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| Linerger LGY 630             | 680                                        | 590     | 630     | 550     | 590     | 530     | 550     | 500     | 530     | 460     | 460     | ■       |
| Linerger LGY 800             | 840                                        | 760     | 800     | 720     | 760     | 680     | 720     | 640     | 680     | 600     | 640     | ■       |
| Linerger LGY 1000            | 1040                                       | 950     | 990     | 900     | 950     | 850     | 900     | 800     | 850     | 750     | 800     | ■       |
| Linerger LGY 1250            | 1290                                       | 1170    | 1230    | 1100    | 1170    | 1030    | 1100    | 970     | 1050    | 910     | 980     | ■       |
| Linerger LGY 1600            | 1580                                       | 1390    | 1480    | 1320    | 1390    | 1250    | 1320    | 1180    | 1250    | 1110    | 1180    | ■       |
| Linerger LGY 2000 (2 x 1000) | 1900                                       | 1720    | 1820    | 1620    | 1720    | 1520    | 1620    | 1420    | 1520    | 1320    | 1420    | ■       |
| Linerger LGY 2500 (2 x 1250) | 2380                                       | 2120    | 2260    | 2020    | 2120    | 1900    | 2020    | 1780    | 1900    | 1660    | 1780    | ■       |
| Linerger LGY 3200 (2 x 1600) | 3060                                       | 2780    | 2920    | 2640    | 2780    | 2500    | 2640    | 2360    | 2500    | 2220    | 2360    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Designing busbars

### Fupact GS, ISFT Vertical Linergy BS busbars

#### Electrical characteristics

#### Lateral Linergy BS busbars

##### Fupact GS/ISFT

##### Linerger BS bars, 5 mm thick

| Type of bars              | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|---------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                           | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                           | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase            | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linergy BS bar, 60 x 5  | 800                                        | 750     | 760     | 700     | 710     | 650     | 660     | 600     | 610     | 550     | 560     | ■       |
| 1 Linergy BS bar, 80 x 5  | 1000                                       | 910     | 970     | 860     | 910     | 810     | 860     | 750     | 810     | 700     | 750     | ■       |
| 2 Linergy BS bars, 60 x 5 | 1400                                       | 1250    | 1320    | 1160    | 1250    | 1070    | 1160    | 980     | 1070    | 880     | 980     | ■       |
| 2 Linergy BS bars, 80 x 5 | 1700                                       | 1500    | 1600    | 1400    | 1500    | 1280    | 1400    | 1160    | 1280    | 1030    | 1160    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

##### Linerger BS bars, 10 mm thick

| Type of bars                  | Permissible current (A)                    |         |         |         |         |         |         |         |         |         |         |         |
|-------------------------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                               | Ambient temperature around the switchboard |         |         |         |         |         |         |         |         |         |         |         |
|                               | 25 °C                                      |         | 30 °C   |         | 35 °C   |         | 40 °C   |         | 45 °C   |         | 50 °C   |         |
| Size per phase                | IP ≤ 31                                    | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 | IP ≤ 31 | IP > 31 |
| 1 Linergy BS bar, 50 x 10     | 1150                                       | 1000    | 1080    | 930     | 1000    | 850     | 930     | 760     | 850     | 670     | 760     | ■       |
| 1 Linergy BS bar, 60 x 10     | 1400                                       | 1250    | 1320    | 1160    | 1250    | 1070    | 1160    | 980     | 1070    | 880     | 980     | ■       |
| 1 Linergy BS bar, 80 x 10     | 1700                                       | 1500    | 1600    | 1400    | 1500    | 1280    | 1400    | 1160    | 1280    | 1030    | 1160    | ■       |
| 2 Linergy BS bars, 50 x 10    | 1940                                       | 1690    | 1810    | 1560    | 1700    | 1420    | 1560    | 1270    | 1420    | 1100    | 1270    | ■       |
| 2 Linergy BS bars, 60 x 10    | 2170                                       | 1900    | 2040    | 1750    | 1900    | 1590    | 1750    | 1420    | 1590    | 1240    | 1420    | ■       |
| 2 Linergy BS bars, 80 x 10    | 2670                                       | 2340    | 2500    | 2160    | 2340    | 1970    | 2160    | 1770    | 1970    | 1550    | 1770    | ■       |
| 2 x 1 Linergy BS bar, 80 x 10 | 3020                                       | 2650    | 2840    | 2450    | 2650    | 2230    | 2450    | 2010    | 2230    | 1760    | 2010    | ■       |

■ Connection impossible due to the operating-temperature limits of the devices installed in the switchboard.

## Selection of enclosures according to the premises

## Enclosure characteristics

The IP and IK degrees of protection provided by an enclosure must be specified as a function of the various external influences defined by standard IEC 30364-5-51, in particular:

- presence of foreign solid bodies (code AE)
- presence of water (code AD)
- mechanical stress (code not specified)
- capability of persons (code BA)
- ...

**PrismaSeT P Active switchboards are designed for indoor installation.**

Unless the rules, standards and regulations of a specific country stipulate otherwise, Schneider Electric recommends the following IP and IK values based on French guide UTE C 15-103 (March 2004).

## Using the table

- 1 Opposite the relevant premises, read the recommended IP and IK values.
- 2 The ■ symbol indicates the enclosure or cubicle satisfying the criteria of the UTE guide.  
Any enclosure or cubicle with a higher degree of protection can also be used.
- 3 If several degrees of protection are possible (refer to the standard for more details) and the □ and ■ symbols are indicated (e.g. 24<sup>□</sup>/25<sup>■</sup>), enclosures that correspond to the higher degree of protection (■) are suitable for the lower degree of protection (□).

| Type of premises                                      | Enclosure           |       |                  |                        |                                 |           |                        |
|-------------------------------------------------------|---------------------|-------|------------------|------------------------|---------------------------------|-----------|------------------------|
|                                                       | Cubicle             |       | with fixed frame | with door + IP30 cover | with door + gasket + IP30 cover | IP43/IK08 | with door + IP55 cover |
|                                                       | Min. IP/IK required |       |                  |                        |                                 |           |                        |
|                                                       | IP                  | IK    | IP30/IK07        | IP30/IK08              | IP31/IK08                       | IP43/IK08 | IP55/IK10              |
| <b>Domestic or comparable premises or locations</b>   |                     |       |                  |                        |                                 |           |                        |
| Porch                                                 | 24                  | 07    |                  |                        |                                 |           | ■                      |
| Bathrooms (see washrooms)                             |                     |       |                  |                        |                                 |           |                        |
| Bicycles, motorcycles, tricycles, etc. (premises for) | 20                  | 07    | ■                |                        |                                 |           |                        |
| Water, sewer and heating connections                  | 23                  | 02    |                  |                        |                                 | ■         |                        |
| Laundries                                             | 21                  | 02    |                  |                        | ■                               |           |                        |
| Cellars, garages, furnace rooms                       | 20                  | 02/07 | ■                |                        |                                 |           |                        |
| Bedrooms                                              | 20                  | 02    | ■                |                        |                                 |           |                        |
| Trash rooms                                           | 25                  | 07    |                  |                        |                                 |           | ■                      |
| Halls in cellars                                      | 20                  | 07    |                  |                        |                                 |           |                        |
| Courtyards                                            | 24/25               | 02/07 |                  |                        |                                 |           | ■                      |
| Kitchens                                              | 20                  | 02    | ■                |                        |                                 |           |                        |
| Shower rooms (see washrooms)                          |                     |       |                  |                        |                                 |           |                        |
| Indoor stairways and alleys                           | 20                  | 02/07 | ■                |                        |                                 |           |                        |
| Outdoor stairways and outdoor alleys without roofs    | 24                  | 07    |                  |                        |                                 |           |                        |
| Outdoor alleys with roofs                             | 21                  | 02    |                  |                        | ■                               |           |                        |
| Attics (roof space)                                   | 20                  | 02    | ■                |                        |                                 |           |                        |
| Garden shelters                                       | 24/25               | 02/07 |                  |                        |                                 |           | ■                      |
| Latrines                                              | 20                  | 02    | ■                |                        |                                 |           |                        |
| Dustbin rooms                                         | 25                  | 02/07 |                  |                        |                                 |           | ■                      |
| Ironing room                                          | 20                  | 02    | ■                |                        |                                 |           |                        |
| Access ramps to garages                               | 25                  | 07    |                  |                        |                                 |           | ■                      |
| No applicable                                         |                     |       |                  |                        |                                 |           |                        |



## Selection of enclosures according to the premises

## Enclosure characteristics

| Type of premises                                        |                    | Enclosure           |                                  |                  |                        |                                 |           |                        |
|---------------------------------------------------------|--------------------|---------------------|----------------------------------|------------------|------------------------|---------------------------------|-----------|------------------------|
|                                                         |                    | Cubicle             |                                  | with fixed frame | with door + IP30 cover | with door + gasket + IP30 cover |           | with door + IP55 cover |
|                                                         |                    | Min. IP/IK required |                                  | IP30/IK07        | IP30/IK08              | IP31/IK08                       | IP43/IK08 | IP55/IK10              |
|                                                         |                    | IP                  | IK                               |                  |                        |                                 |           |                        |
| Washrooms, rooms containing a bathtub or shower         | volume 0           | 27                  | 02                               |                  |                        |                                 |           |                        |
|                                                         | volume 1           | 24                  | 02                               |                  |                        |                                 |           | ■                      |
|                                                         | volume 2           | 23                  | 02                               |                  |                        |                                 | ■         |                        |
|                                                         | volume 3           | 21                  | 02                               |                  |                        | ■                               |           |                        |
| Lounges, living rooms, etc                              |                    | 20                  | 02                               | ■                |                        |                                 |           |                        |
| Drying rooms                                            |                    | 21                  | 02                               |                  |                        | ■                               |           |                        |
| Covered terraces                                        |                    | 21                  | 02                               |                  |                        | ■                               |           |                        |
| WCs                                                     |                    | 20                  | 02                               | ■                |                        |                                 |           |                        |
| Verandas                                                |                    | 20                  | 02                               | ■                |                        |                                 |           |                        |
| Crawl spaces                                            |                    | 23                  | 07                               |                  |                        |                                 |           |                        |
| Commercial premises and adjoining areas                 |                    |                     |                                  |                  |                        |                                 |           |                        |
| Gunsmiths (storage area, workshop)                      |                    | 30                  | 08                               |                  | ■                      |                                 |           |                        |
| Laundries (wash room)                                   |                    | 24                  | 07                               |                  |                        |                                 |           | ■                      |
| Butchers                                                | shop               | 24                  | 07                               |                  |                        |                                 |           | ■                      |
|                                                         | cold room ≤ -10 °C | 23                  | 07                               |                  |                        |                                 | ■         |                        |
| Bakers, cake shops (kitchens)                           |                    | 50                  | 07                               |                  |                        |                                 |           | ■                      |
| Coffee roasters                                         |                    | 21                  | 02                               |                  |                        | ■                               |           |                        |
| Coal, wood, oil                                         |                    | 20                  | 08                               |                  | ■                      |                                 |           |                        |
| Delicatessen (production)                               |                    | 24                  | 07                               |                  |                        |                                 |           | ■                      |
| Sweets (production)                                     |                    | 20                  | 02                               | ■                |                        |                                 |           |                        |
| Shoe repair shops                                       |                    | 20                  | 02                               | ■                |                        |                                 |           |                        |
| Dairies                                                 |                    | 24                  | 02                               |                  |                        |                                 |           | ■                      |
| Hardware stores (storage areas for chemicals and paint) |                    | 33                  | 07                               |                  |                        |                                 | ■         |                        |
| Wood workers                                            |                    | 50                  | 07                               |                  |                        |                                 |           | ■                      |
| Art galleries                                           |                    | 20                  | 02/07                            | ■                |                        |                                 |           |                        |
| Florists                                                |                    | 24                  | 07                               |                  |                        |                                 |           | ■                      |
| Furriers                                                |                    | 20                  | 07                               | ■                |                        |                                 |           |                        |
| Fruit and vegetable merchants                           |                    | 24                  | 07                               |                  |                        |                                 |           | ■                      |
| Grain shops                                             |                    | 50                  | 07                               |                  |                        |                                 |           | ■                      |
| Bookshops, stationers                                   |                    | 20                  | 02                               | ■                |                        |                                 |           |                        |
| Motorcycle and bicycle repairs and accessories          |                    | 20                  | 08                               |                  | ■                      |                                 |           |                        |
| Messenger services                                      |                    | 20                  | 08                               |                  | ■                      |                                 |           |                        |
| Furniture shops (antiques, secondhand)                  |                    | 20                  | 07                               | ■                |                        |                                 |           |                        |
| Glass and mirror merchants (workshop)                   |                    | 20                  | 07                               | ■                |                        |                                 |           |                        |
| Wallpaper shop (storage area)                           |                    | 20                  | 07                               | ■                |                        |                                 |           |                        |
| Cosmetics shop (storage area)                           |                    | 20                  | 02                               | ■                |                        |                                 |           |                        |
| Chemists (storage area)                                 |                    | 20                  | 02                               | ■                |                        |                                 |           |                        |
| Photographers (dark room)                               |                    | 23                  | 02                               |                  |                        |                                 | ■         |                        |
| Plumbers (storage area)                                 |                    | 20                  | 08                               |                  | ■                      |                                 |           |                        |
| Fishmongers                                             |                    | 25                  | 07                               |                  |                        |                                 |           | ■                      |
| Dry cleaners                                            |                    | 23                  | 02                               |                  |                        |                                 | ■         |                        |
| Hardware stores (without paint, chemicals, etc.)        |                    | 20                  | 07                               | ■                |                        |                                 |           |                        |
| Locksmiths                                              |                    | 20                  | 07 <sup>2</sup> /08 <sup>2</sup> | ■                | ■                      |                                 |           |                        |
| Vintners, spirits                                       |                    | 20                  | 07                               | ■                |                        |                                 |           |                        |
| Interior decorator (carding)                            |                    | 50                  | 07                               |                  |                        |                                 |           | ■                      |
| Tailors, clothing retailers (storage area)              |                    | 20                  | 02                               | ■                |                        |                                 |           |                        |
| Pet care                                                |                    | 35                  | 07                               |                  |                        |                                 |           | ■                      |

No applicable

## Selection of enclosures according to the premises

## Enclosure characteristics

| Type of premises                                        |                                                                            | Enclosure           |         |                  |                        |                                 |           |                        |
|---------------------------------------------------------|----------------------------------------------------------------------------|---------------------|---------|------------------|------------------------|---------------------------------|-----------|------------------------|
|                                                         |                                                                            | Cubicle             |         | with fixed frame | with door + IP30 cover | with door + gasket + IP30 cover |           | with door + IP55 cover |
|                                                         |                                                                            | Min. IP/IK required |         | IP30/IK07        | IP30/IK08              | IP31/IK08                       | IP43/IK08 | IP55/IK10              |
|                                                         |                                                                            | IP                  | IK      |                  |                        |                                 |           |                        |
| Shared premises of buildings open to the general public | storage rooms                                                              | 20                  | 08      |                  | ■                      |                                 |           |                        |
|                                                         | packing rooms                                                              | 20                  | 08      |                  | ■                      |                                 |           |                        |
|                                                         | archive rooms                                                              | 20                  | 02      | ■                |                        |                                 |           |                        |
|                                                         | film and magnetic media storage                                            | 20                  | 02      | ■                |                        |                                 |           |                        |
|                                                         | linen rooms                                                                | 20                  | 02      | ■                |                        |                                 |           |                        |
|                                                         | laundry rooms                                                              | 24                  | 07      |                  |                        |                                 |           | ■                      |
|                                                         | misc. shops                                                                | 21                  | 07/08   |                  |                        | ■                               |           |                        |
|                                                         | kitchens (large)                                                           |                     |         |                  |                        |                                 |           |                        |
| J                                                       | Reception old and handicapped people                                       | 20                  | 02      | ■                |                        |                                 |           |                        |
| L                                                       | Lecture halls, meeting rooms, auditoriums, halls used for several purposes | 20                  | 02/07   | ■                |                        |                                 |           |                        |
|                                                         | stage areas                                                                | 20                  | 08      |                  | ■                      |                                 |           |                        |
|                                                         | scenery storage rooms                                                      | 20                  | 08      |                  | ■                      |                                 |           |                        |
|                                                         | costume rooms                                                              | 20                  | 07      | ■                |                        |                                 |           |                        |
| M                                                       | Retail premises, shopping malls                                            | 20                  | 08      |                  | ■                      |                                 |           |                        |
|                                                         | areas for storage and handling of packing                                  | 20                  | 08      |                  | ■                      |                                 |           |                        |
| N                                                       | Restaurants and cafes                                                      | 20                  | 08      |                  | ■                      |                                 |           |                        |
| O                                                       | Hotels and boarding houses                                                 | 20                  | 02      | ■                |                        |                                 |           |                        |
| P                                                       | Dance halls and gaming parlours                                            | 20                  | 07      | ■                |                        |                                 |           |                        |
| R                                                       | Teaching establishments, holiday camps                                     | 20                  | 02      | ■                | ■                      |                                 |           |                        |
|                                                         | dormitories                                                                | 20                  | 08      |                  | ■                      |                                 |           |                        |
| S                                                       | Libraries and documentation centres                                        | 20                  | 02      | ■                |                        |                                 |           |                        |
|                                                         |                                                                            | 20                  | 02      | ■                |                        |                                 |           |                        |
| T                                                       | Exhibitions                                                                | 20                  | 02      | ■                |                        |                                 |           |                        |
|                                                         | areas for reception of equipment and merchandise                           | 20                  | 07      | ■                |                        |                                 |           |                        |
| U                                                       | Healthcare establishments                                                  | 20                  | 02      | ■                |                        |                                 |           |                        |
|                                                         | incineration                                                               | 21                  | 07/08   |                  |                        | ■                               |           |                        |
|                                                         | operating rooms                                                            | 20                  | 07      | ■                |                        |                                 |           |                        |
|                                                         | centralised sterilisation                                                  | 24                  | 02/07   |                  |                        |                                 |           | ■                      |
|                                                         | pharmacies and labs with more than 10 l of inflammable liquids             | 21°/23°             | 02°/07° |                  |                        | ■                               | ■         |                        |
| V                                                       | Places of worship                                                          | 20                  | 02      | ■                |                        |                                 |           |                        |
| W                                                       | Administrative premises, banks                                             | 20                  | 02      | ■                |                        |                                 |           |                        |
| X                                                       | Indoor sports facilities                                                   | 20                  | 07°/08° | ■                | ■                      |                                 |           |                        |
|                                                         | premises containing refrigeration facilities                               | 21                  | 08      |                  |                        | ■                               |           |                        |
| Y                                                       | Museums                                                                    | 20                  | 02      | ■                |                        |                                 |           |                        |
| PA                                                      | Covered open air facilities                                                | 23°/25°             | 08°/10° |                  |                        |                                 | ■         | ■                      |
| CTS                                                     | Marquees and tents                                                         | 44                  | 08      |                  |                        |                                 |           | ■                      |
| SG                                                      | Inflatable structures                                                      | 44                  | 08      |                  |                        |                                 |           | ■                      |
| PS                                                      | Covered parking lots                                                       | 21                  | 08°/10° |                  |                        | ■                               |           | ■                      |

## Selection of enclosures according to the premises

## Enclosure characteristics

| Type of premises                                                                            |               | Enclosure                        |                                  |                  |                        |                                 |                        |
|---------------------------------------------------------------------------------------------|---------------|----------------------------------|----------------------------------|------------------|------------------------|---------------------------------|------------------------|
|                                                                                             |               | Cubicle                          |                                  | with fixed frame | with door + IP30 cover | with door + gasket + IP30 cover | with door + IP55 cover |
|                                                                                             |               | Min. IP/IK required              |                                  | IP30/IK07        | IP30/IK08              | IP31/IK08                       | IP43/IK08              |
|                                                                                             |               | IP                               | IK                               |                  |                        |                                 | IP55/IK10              |
| <b>Technical premises</b>                                                                   |               |                                  |                                  |                  |                        |                                 |                        |
| Battery rooms                                                                               |               | 23                               | 02/07                            |                  |                        |                                 | ■                      |
| Lifts (machine rooms and pulley rooms)                                                      |               | 20                               | 07 <sup>°</sup> /08 <sup>■</sup> | ■                | ■                      |                                 |                        |
| Electrical rooms                                                                            |               | 20                               | 07                               | ■                |                        |                                 |                        |
| Control rooms                                                                               |               | 20                               | 02                               | ■                |                        |                                 |                        |
| Workshops                                                                                   |               | 21 <sup>°</sup> /23 <sup>■</sup> | 07 <sup>°</sup> /08 <sup>■</sup> |                  |                        | ■                               | ■                      |
| Laboratories                                                                                |               | 21 <sup>°</sup> /23 <sup>■</sup> | 02 <sup>°</sup> /07 <sup>■</sup> |                  |                        | ■                               | ■                      |
| Air conditioning washers                                                                    |               | 24                               | 07                               |                  |                        |                                 | ■                      |
| Garages (used exclusively for parking vehicles) of an area not exceeding 100 m <sup>2</sup> |               | 21                               | 07                               |                  |                        | ■                               |                        |
| Machine rooms                                                                               |               | 31                               | 07/08                            |                  |                        | ■                               |                        |
| Water pressurisers                                                                          |               | 23                               | 07/08                            |                  |                        |                                 | ■                      |
| <b>Boiler houses and adjoining premises (power in excess of 70 kW)</b>                      |               |                                  |                                  |                  |                        |                                 |                        |
| Boiler rooms                                                                                | coal fuel     | 51 <sup>°</sup> /61 <sup>■</sup> | 07 <sup>°</sup> /08 <sup>■</sup> |                  |                        |                                 | ■                      |
|                                                                                             | other fuel    | 21                               | 07/08                            |                  |                        | ■                               |                        |
|                                                                                             | electrical    | 21                               | 07/08                            |                  |                        | ■                               |                        |
| Fuel storage areas                                                                          | coal          | 50 <sup>°</sup> /60 <sup>■</sup> | 08                               |                  |                        |                                 | ■                      |
|                                                                                             | oil           | 20                               | 07 <sup>°</sup> /08 <sup>■</sup> | ■                | ■                      |                                 |                        |
|                                                                                             | liquefied gas | 20                               | 07 <sup>°</sup> /08 <sup>■</sup> | ■                | ■                      |                                 |                        |
| Cinder tips                                                                                 |               | 50                               | 08                               |                  |                        |                                 | ■                      |
| Pump rooms                                                                                  |               | 21 <sup>°</sup> /23 <sup>■</sup> | 07 <sup>°</sup> /08 <sup>■</sup> |                  |                        | ■                               | ■                      |
| Pressure reduction rooms (gas)                                                              |               | 20                               | 07 <sup>°</sup> /08 <sup>■</sup> | ■                | ■                      |                                 |                        |
| Steam or hot water facilities                                                               |               | 21 <sup>°</sup> /23 <sup>■</sup> | 07 <sup>°</sup> /08 <sup>■</sup> |                  |                        | ■                               | ■                      |
| Expansion vessel room                                                                       |               | 21                               | 02                               |                  |                        | ■                               |                        |
| <b>Garages and car parks of an area exceeding 100 m<sup>2</sup></b>                         |               |                                  |                                  |                  |                        |                                 |                        |
| Parking lots                                                                                |               | 21                               | 07 <sup>°</sup> /10 <sup>■</sup> |                  |                        | ■                               | ■                      |
| Carwash areas (inside premises)                                                             |               | 25                               | 07                               |                  |                        |                                 | ■                      |
| Petrol stations                                                                             | inside        | 21                               | 07                               |                  |                        | ■                               |                        |
|                                                                                             | outside       |                                  |                                  |                  |                        |                                 |                        |
| Lubrication areas                                                                           |               | 23                               | 08                               |                  |                        |                                 | ■                      |
| Battery recharging areas                                                                    |               | 23                               | 07                               |                  |                        |                                 | ■                      |
| Workshops                                                                                   |               | 21                               | 08                               |                  |                        | ■                               |                        |
| <b>Public building (other than for the general public)</b>                                  |               |                                  |                                  |                  |                        |                                 |                        |
| Offices                                                                                     |               | 20                               | 02                               | ■                |                        |                                 |                        |
| Libraries                                                                                   |               | 20                               | 02                               | ■                |                        |                                 |                        |
| Archives                                                                                    |               | 20                               | 02                               | ■                |                        |                                 |                        |
| Computer rooms                                                                              |               | 20                               | 02                               | ■                |                        |                                 |                        |
| Design offices                                                                              |               | 20                               | 02                               | ■                |                        |                                 |                        |
| Rooms containing reprographic machines                                                      |               | 20                               | 02                               | ■                |                        |                                 |                        |
| Sorting rooms                                                                               |               | 20                               | 07                               | ■                |                        |                                 |                        |
| Refectories in restaurants or canteens                                                      |               | 21                               | 07                               |                  |                        | ■                               |                        |
| Large kitchens                                                                              |               |                                  |                                  |                  |                        |                                 |                        |
| Sports rooms                                                                                |               | 20                               | 07 <sup>°</sup> /08 <sup>■</sup> | ■                | ■                      |                                 |                        |
| Barracks                                                                                    |               | 20                               | 07                               | ■                |                        |                                 |                        |
| Meeting rooms                                                                               |               | 20                               | 02                               | ■                |                        |                                 |                        |
| Waiting rooms, lounges, halls                                                               |               | 20                               | 02                               | ■                |                        |                                 |                        |
| Medical consulting rooms, not fitted with specific equipment                                |               | 20                               | 02                               | ■                |                        |                                 |                        |
| Demonstration and exhibition rooms                                                          |               | 20                               | 02/07                            | ■                |                        |                                 |                        |

No applicable

## Selection of enclosures according to the premises

## Enclosure characteristics

| Type of premises                                                         |                                                | Enclosure           |       |                  |                        |                                 |                        |
|--------------------------------------------------------------------------|------------------------------------------------|---------------------|-------|------------------|------------------------|---------------------------------|------------------------|
|                                                                          |                                                | Cubicle             |       | with fixed frame | with door + IP30 cover | with door + gasket + IP30 cover | with door + IP55 cover |
|                                                                          |                                                | Min. IP/IK required |       | IP30/IK07        | IP30/IK08              | IP31/IK08                       | IP43/IK08              |
|                                                                          |                                                | IP                  | IK    |                  |                        |                                 |                        |
| <b>Farm premises or locations</b>                                        |                                                |                     |       |                  |                        |                                 |                        |
| Alcohol (storage)                                                        |                                                | 23                  | 07    |                  |                        |                                 | ■                      |
| Closed cattle sheds                                                      |                                                | 35                  | 07    |                  |                        |                                 | ■                      |
| Laundries                                                                |                                                | 24                  | 07    |                  |                        |                                 | ■                      |
| Wood storage rooms                                                       |                                                | 30                  | 10    |                  |                        |                                 | ■                      |
| Threshing floors                                                         |                                                | 50                  | 07    |                  |                        |                                 | ■                      |
| Distilling cellars                                                       |                                                | 23                  | 07    |                  |                        |                                 | ■                      |
| Vat rooms (wine)                                                         |                                                | 23                  | 07    |                  |                        |                                 | ■                      |
| Courtyards                                                               |                                                | 35                  | 07    |                  |                        |                                 | ■                      |
| Poultry barns                                                            |                                                | 35                  | 07    |                  |                        |                                 | ■                      |
| Stables                                                                  |                                                | 35                  | 07    |                  |                        |                                 | ■                      |
| Fertiliser (storage)                                                     |                                                | 50                  | 07    |                  |                        |                                 | ■                      |
| Stables                                                                  |                                                | 35                  | 07    |                  |                        |                                 | ■                      |
| Manure heaps                                                             |                                                | 24                  | 07    |                  |                        |                                 | ■                      |
| Haylofts                                                                 |                                                | 50                  | 07    |                  |                        |                                 | ■                      |
| Haystacks, forage (storage)                                              |                                                | 50                  | 07    |                  |                        |                                 | ■                      |
| Granaries, barns                                                         |                                                | 50                  | 07    |                  |                        |                                 | ■                      |
| Straw (storage)                                                          |                                                | 50                  | 07    |                  |                        |                                 | ■                      |
| Greenhouses                                                              |                                                | 23                  | 07    |                  |                        |                                 | ■                      |
| Grain silos                                                              |                                                | 50                  | 07    |                  |                        |                                 | ■                      |
| Milking rooms                                                            |                                                | 35                  | 07    |                  |                        |                                 | ■                      |
| Pig sties                                                                |                                                | 35                  | 07    |                  |                        |                                 | ■                      |
| Chicken houses                                                           |                                                | 35                  | 07    |                  |                        |                                 | ■                      |
| <b>Miscellaneous installations</b>                                       |                                                |                     |       |                  |                        |                                 |                        |
| Fair facilities                                                          |                                                | 33                  | 08    |                  |                        |                                 | ■                      |
| Water treatment facilities                                               |                                                | 24/25               | 07/08 |                  |                        |                                 | ■                      |
| <b>Thermodynamic installations, air-conditioned rooms and cold rooms</b> |                                                |                     |       |                  |                        |                                 |                        |
| Height above ground                                                      | from 0 to 1.10 m                               | 25                  | 07    |                  |                        |                                 | ■                      |
|                                                                          | from 1.10 to 2 m                               | 24                  | 07    |                  |                        |                                 | ■                      |
|                                                                          | above 2 m under evaporator or water drain pipe | 21                  | 07    |                  |                        | ■                               |                        |
|                                                                          | ceiling and up to 10 cm underneath             | 23                  | 07    |                  |                        |                                 | ■                      |
| Temperature ≤ -10 °C                                                     |                                                | 23                  | 07    |                  |                        |                                 | ■                      |
| Compressor                                                               | room                                           | 21                  | 08    |                  |                        | ■                               |                        |
|                                                                          | integral unit located outside or on a terrace  | 34                  | 08    |                  |                        |                                 |                        |

No applicable

## Selection of enclosures according to the premises

## Enclosure characteristics

| Type of premises                        | Enclosure                        |    |                  |                        |                                 |           |                        |
|-----------------------------------------|----------------------------------|----|------------------|------------------------|---------------------------------|-----------|------------------------|
|                                         | Cubicle                          |    | with fixed frame | with door + IP30 cover | with door + gasket + IP30 cover |           | with door + IP55 cover |
|                                         | Min. IP/IK required              |    | IP30/IK07        | IP30/IK08              | IP31/IK08                       | IP43/IK08 | IP55/IK10              |
|                                         | IP                               | IK |                  |                        |                                 |           |                        |
| <b>Industrial facilities</b>            |                                  |    |                  |                        |                                 |           |                        |
| Slaughter houses                        | 55                               | 08 |                  |                        |                                 |           | ■                      |
| Batteries (manufacture)                 | 33                               | 07 |                  |                        |                                 | ■         |                        |
| Acid (manufacture and storage)          | 33                               | 07 |                  |                        |                                 | ■         |                        |
| Alcohol (manufacture and storage)       | 33                               | 07 |                  |                        |                                 | ■         |                        |
| Aluminium (manufacture and storage)     | 51                               | 08 |                  |                        |                                 |           | ■                      |
| Livestock (raising, fattening and sale) | 45                               | 07 |                  |                        |                                 |           | ■                      |
| Asphalt and bitumen storage             | 53                               | 07 |                  |                        |                                 |           | ■                      |
| Wool beating and carding                | 50                               | 08 |                  |                        |                                 |           | ■                      |
| Industrial laundry                      | 24/25                            | 07 |                  |                        |                                 |           | ■                      |
| Wood (processing)                       | 50                               | 08 |                  |                        |                                 |           | ■                      |
| Meat packers                            | 24/25                            | 07 |                  |                        |                                 |           | ■                      |
| Bakeries                                | 50                               | 07 |                  |                        |                                 |           | ■                      |
| Breweries                               | 24                               | 07 |                  |                        |                                 |           | ■                      |
| Brickworks                              | 53                               | 08 |                  |                        |                                 |           | ■                      |
| Rubber (production and processing)      | 54                               | 07 |                  |                        |                                 |           | ■                      |
| Carbide (manufacture and storage)       | 51                               | 07 |                  |                        |                                 | ■         | ■                      |
| Ammunition factories                    | 53                               | 08 |                  |                        |                                 |           | ■                      |
| Carton board (production)               | 33                               | 07 |                  |                        |                                 | ■         |                        |
| Quarries                                | 55                               | 08 |                  |                        |                                 |           | ■                      |
| Celluloid (manufacture of objects)      | 30                               | 08 |                  | ■                      |                                 |           |                        |
| Cellulose (manufacture)                 | 34                               | 08 |                  |                        |                                 |           | ■                      |
| Coal (depots)                           | 53                               | 08 |                  |                        |                                 |           | ■                      |
| Pork products                           | 24/25                            | 07 |                  |                        |                                 |           | ■                      |
| Boiler-making works                     | 30                               | 08 |                  | ■                      |                                 |           |                        |
| Lime kilns                              | 50                               | 08 |                  |                        |                                 |           | ■                      |
| Rag (storage)                           | 30                               | 07 | ■                |                        |                                 |           |                        |
| Chlorine (manufacture and storage)      | 33                               | 07 |                  |                        |                                 | ■         |                        |
| Chrome-plating                          | 33                               | 07 |                  |                        |                                 | ■         |                        |
| Cement works                            | 50                               | 08 |                  |                        |                                 |           | ■                      |
| Coking plant                            | 53                               | 08 |                  |                        |                                 |           | ■                      |
| Adhesives (production)                  | 33                               | 07 |                  |                        |                                 |           |                        |
| Bottling lines                          | 35                               | 08 |                  |                        |                                 |           | ■                      |
| Liquid fuels (storage)                  | 31 <sup>□</sup> /33 <sup>■</sup> | 08 |                  |                        | ■                               |           |                        |
| Fats (processing)                       | 51                               | 07 |                  |                        |                                 |           | ■                      |
| Leather (tanning and storage)           | 31                               | 08 |                  |                        | ■                               |           |                        |
| Copper (ore processing)                 | 31                               | 08 |                  |                        | ■                               |           |                        |
| Paint stripping                         | 54                               | 08 |                  |                        |                                 | ■         | ■                      |
| Detergents (manufacture)                | 53                               | 07 |                  |                        |                                 | ■         | ■                      |
| Distilleries                            | 33                               | 07 |                  |                        |                                 | ■         |                        |
| Electrolysis                            | 33                               | 08 |                  |                        |                                 | ■         |                        |
| Ink manufacturing                       | 31                               | 07 |                  |                        | ■                               |           | ■                      |
| Fertilisers (manufacture and storage)   | 53                               | 07 |                  |                        |                                 |           | ■                      |
| Explosives (manufacture and storage)    | 55                               | 08 |                  |                        |                                 |           | ■                      |
| Iron (production and processing)        | 51                               | 08 |                  |                        |                                 |           | ■                      |
| Spinning mills                          | 50                               | 07 |                  |                        |                                 |           | ■                      |
| Furriers (beating process)              | 50                               | 07 |                  |                        |                                 |           | ■                      |
| Cheese factories                        | 25                               | 07 |                  |                        |                                 |           | ■                      |
| Gas (production and storage)            | 31                               | 08 |                  |                        | ■                               |           |                        |
| Tar (processing)                        | 33                               | 05 |                  |                        |                                 | ■         |                        |
| Seed production                         | 50                               | 07 |                  |                        |                                 |           | ■                      |
| Metal engraving                         | 33                               | 07 |                  |                        |                                 | ■         |                        |
| Oils (extraction)                       | 31                               | 07 |                  |                        | ■                               |           |                        |
| Petroleum products (manufacture)        | 33 <sup>□</sup> /34 <sup>■</sup> | 08 |                  |                        |                                 | ■         | ■                      |
| Printworks                              | 20                               | 08 |                  |                        |                                 |           |                        |

## Selection of enclosures according to the premises

## Enclosure characteristics

| Type of premises                                                 | Enclosure                        |           |                  |                        |                                 |   |                        |
|------------------------------------------------------------------|----------------------------------|-----------|------------------|------------------------|---------------------------------|---|------------------------|
|                                                                  | Cubicle                          |           | with fixed frame | with door + IP30 cover | with door + gasket + IP30 cover |   | with door + IP55 cover |
|                                                                  | Min. IP/IK required              | IP30/IK07 |                  |                        |                                 |   |                        |
|                                                                  | IP                               | IK        |                  |                        |                                 |   |                        |
| Industrial establishments (continued)                            |                                  |           |                  |                        |                                 |   |                        |
| Dairies                                                          | 25                               | 07        |                  |                        |                                 |   | ■                      |
| Public wash-houses                                               | 25                               | 07        |                  |                        |                                 |   | ■                      |
| Liqueurs (production)                                            | 21                               | 07        |                  |                        | ■                               |   |                        |
| Halogenated liquids (use)                                        | 21                               | 08        |                  |                        | ■                               |   |                        |
| Inflammable products (storage and workshops where they are used) | 21                               | 08        |                  |                        | ■                               |   |                        |
| Magnesium (production, storage and use)                          | 31                               | 08        |                  |                        | ■                               |   |                        |
| Machine rooms                                                    | 20                               | 08        |                  | ■                      |                                 |   |                        |
| Plastics (production)                                            | 51                               | 08        |                  |                        |                                 |   | ■                      |
| Cabinet makers                                                   | 50                               | 08        |                  |                        |                                 |   | ■                      |
| Metals (processing)                                              | 31 <sup>□</sup> /33 <sup>■</sup> | 08        |                  |                        | ■                               | ■ |                        |
| Combustion engines (testing of)                                  | 30                               | 08        |                  | ■                      |                                 |   |                        |
| Ammunition storage                                               | 33                               | 08        |                  |                        |                                 | ■ |                        |
| Nickel (or processing)                                           | 33                               | 08        |                  |                        |                                 | ■ |                        |
| Household waste (processing)                                     | 54                               | 07        |                  |                        |                                 |   | ■                      |
| Paper (production)                                               | 33 <sup>□</sup> /34 <sup>■</sup> | 07        |                  |                        | ■                               | ■ | ■                      |
| Paper (storage)                                                  | 31                               | 07        |                  |                        | ■                               |   |                        |
| Perfume (production and storage)                                 | 31                               | 07        |                  |                        | ■                               |   |                        |
| Pulp mill                                                        | 34/35                            | 07        |                  |                        |                                 | ■ | ■                      |
| Paint (production and storage)                                   | 33                               | 08        |                  |                        |                                 | ■ |                        |
| Plaster (processing and storage)                                 | 50                               | 07        |                  |                        |                                 |   | ■                      |
| Gunpowder factory                                                | 55                               | 08        |                  |                        |                                 |   | ■                      |
| Chemicals (production)                                           | 30 <sup>□</sup> /50 <sup>■</sup> | 08        |                  | ■                      |                                 |   | ■                      |
| Oil refineries                                                   | 34/35                            | 07        |                  |                        |                                 |   | ■                      |
| Salt preserve factories                                          | 33                               | 07        |                  |                        |                                 | ■ |                        |
| Soap (production)                                                | 31                               | 07        |                  |                        | ■                               |   |                        |
| Saw mills                                                        | 50                               | 08        |                  |                        |                                 |   | ■                      |
| Metalwork shops                                                  | 30                               | 08        |                  | ■                      |                                 |   |                        |
| Grain or sugar silos                                             | 50                               | 07        |                  |                        |                                 |   | ■                      |
| Silk and artificial hair factories                               | 50                               | 08        |                  |                        |                                 |   | ■                      |
| Sodium carbonate (processing and storage)                        | 33                               | 07        |                  |                        |                                 | ■ |                        |
| Sulphur (processing)                                             | 51                               | 07        |                  |                        |                                 |   | ■                      |
| Spirits (storage)                                                | 33                               | 07        |                  |                        |                                 | ■ |                        |
| Sugar mills                                                      | 55                               | 07        |                  |                        |                                 | ■ | ■                      |
| Tanners                                                          | 35                               | 07        |                  |                        |                                 |   | ■                      |
| Dye works                                                        | 35                               | 07        |                  |                        |                                 |   | ■                      |
| Textile and fabric (production)                                  | 51                               | 08        |                  |                        |                                 |   | ■                      |
| Varnish (production and application)                             | 33                               | 08        |                  |                        |                                 | ■ |                        |
| Glass works                                                      | 33                               | 08        |                  |                        |                                 | ■ |                        |
| Zinc works                                                       | 31                               | 08        |                  |                        | ■                               |   |                        |

No applicable

# After sales tools



# Contents

## Practical information

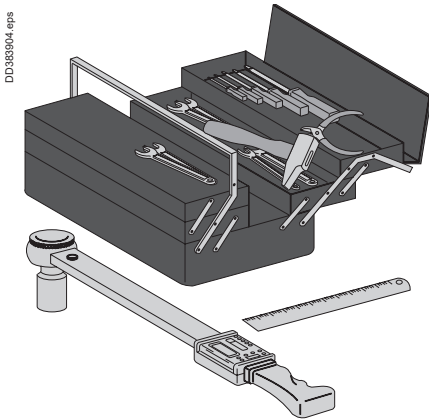
|                                                                                          |             |
|------------------------------------------------------------------------------------------|-------------|
| <b>Tools required for mounting and connection</b>                                        | <b>J-2</b>  |
| <b>Connection of horizontal to vertical busbars</b>                                      | <b>J-3</b>  |
| <b>Installation of the current transformer</b>                                           | <b>J-4</b>  |
| <b>Installation of source changeover systems</b>                                         | <b>J-6</b>  |
| <b>Storage recommendations</b>                                                           | <b>J-8</b>  |
| <b>Packing information</b>                                                               | <b>J-9</b>  |
| <b>Handling on the site</b>                                                              | <b>J-10</b> |
| <b>Transport</b>                                                                         | <b>J-12</b> |
| <b>Cubicle handling and rolling base Lifting reinforcement kit for combined cubicles</b> | <b>J-13</b> |
| <b>Connection of busbar trunking</b>                                                     | <b>J-14</b> |
| <b>Connection of power cables</b>                                                        | <b>J-15</b> |

## Maintenance

|                               |             |
|-------------------------------|-------------|
| <b>Preventive maintenance</b> | <b>J-18</b> |
| <b>Corrective maintenance</b> | <b>J-20</b> |

## Tools required for mounting and connection

## Practical information



- Vacuum cleaner to clean the switchboards
- Ratchet wrench with sockets
- Torque wrench with sockets and ring bits to tighten the electrical connections to the correct torque (max. torque 50 Nm)
- Open-ended torque wrench
- Open-ended spanners (15 to 27 mm).
- Electrician's knife
- 7, 8, 10, 13, 16, 17 and 19 mm sockets
- Bit holder socket
- 4, 5, 6, 8 and 10 mm hexagonal-head bits
- Pozidriv no. 1, 2 and 3 bits
- Rubber mallet
- Level.
- Measurement and inspection tools and instruments
- Drill
- Semi-circuit nosed pliers
- Cable-tie pliers
- Wire stripper
- Crimping tool
- Diagonal cutter
- Wire cutters
- Flat-nosed pliers
- Bit holder for screwdriver
- Extension
- Electric saw
- Jig saw
- Clamp for cubicle alignment
- Buzzer or tester
- 3, 5, 4, 5.5 and 8 mm flat screwdrivers
- Posidriv no. 2 crosshead screwdriver (to mount handle)
- Hydraulic jacks that can be operated in horizontal position to lift cubicles and move them sideways if necessary.
- Coloured, indelible and temperature resistant acrylic varnish.
- Electric screwdriver

**Note:** a Facom brand torque wrench is available with a capacity of 75 Nm and a thin shape. It is recommended for tightening under difficult access conditions.

**Part numbers:**

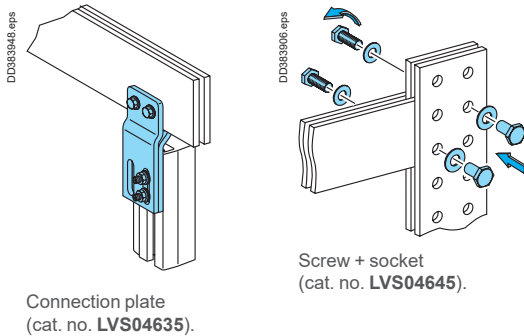
- SP3723 = wrench handle (essential)
- SP3721 = extra-flat ratchet adapter (essential)
- SP3722 = ratchet for ordinary sockets (optional) for mounting on handle SP3723
- SP2709 = extra-flat 13 mm short socket
- SP2709A = extra-flat 13 mm long socket
- SP4369 = extra-flat 16 mm short socket
- SP4370 = extra-flat 16 mm long socket
- SP2710 = extra-flat 17 mm short socket
- SP4371 = extra-flat 19 mm short socket
- SP4372 = extra-flat 19 mm long socket.

# Connection of horizontal to vertical busbars

## Practical information

Horizontal busbars can be connected to vertical busbars (Linery LGY or Linergy BS) in two ways:

- in a duct (by a direct connection ordered from the Catalog)
- in the rear (with part of the connection to be fabricated by the installer).




**5 mm thick horizontal busbars can be connected to vertical busbars using connection plate LVS04634 ( $\leq 1000$  A) or LVS04635 ( $> 1000$  A) after drilling holes in the horizontal bars.**

**10 mm thick horizontal busbars can be connected to vertical busbars in 2 ways:**

- using connection plate LVS04636 ( $\leq 1600$  A) or  $1600 \text{ A} < \text{LVS04637} < 2820 \text{ A}$  without drilling holes in the horizontal bars
- or with a screw and socket assembly (LVS04645) designed for assembly on a busbar that has already been mounted.

This bolted solution requires:

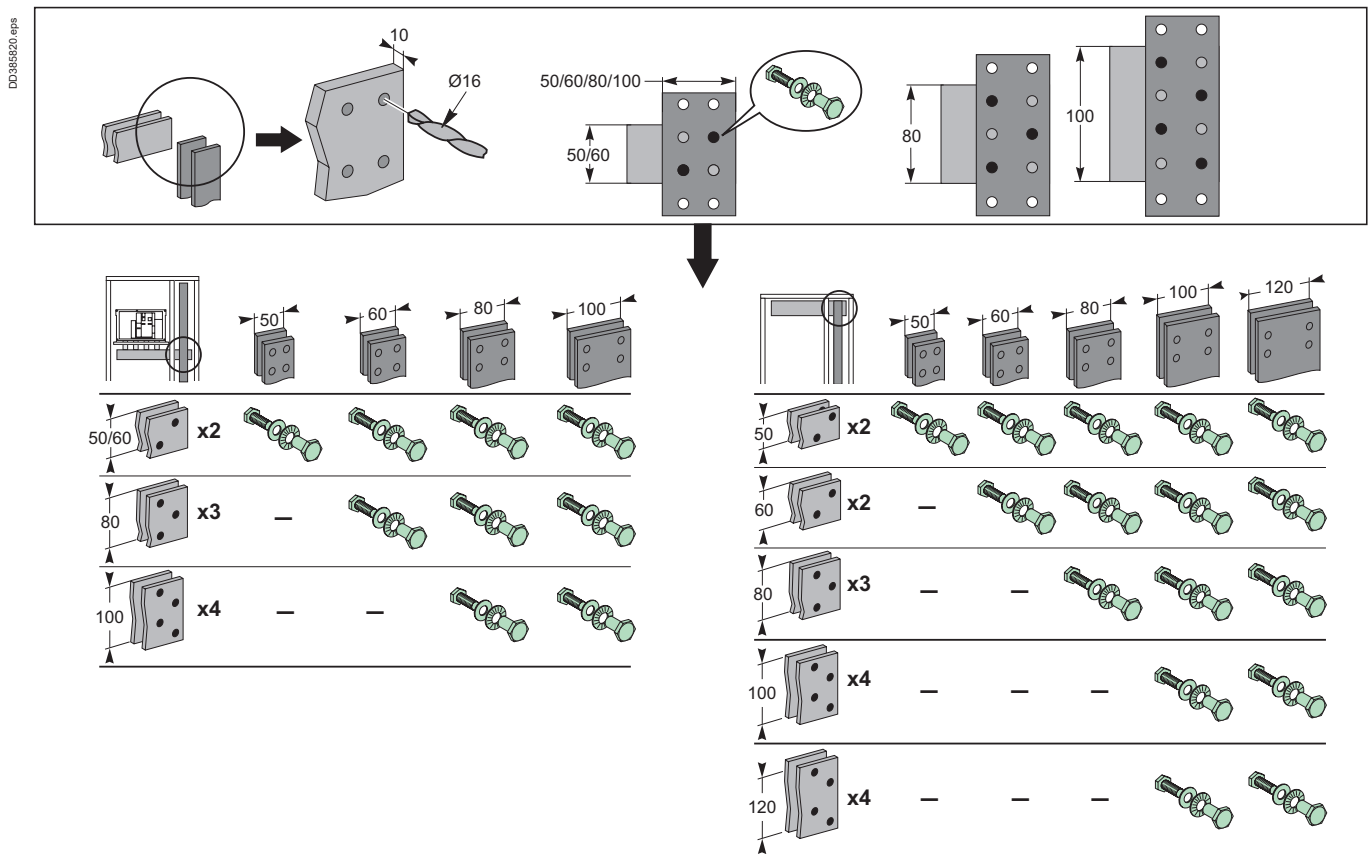- holes drilled in the bars ( $\varnothing 16$  mm) for diagonal mounting of the sockets and screws
- conformity with the following mounting rules:
  - respect the overlap length (2.5 to 5 times the bar thickness)
  - tighten to a torque of 50 Nm
  - fit the recommended number of screws, depending on the bar width as explained below.



In practice, the real contact area is limited to regions in which the pressure is applied effectively.

In a bolted overlap assembly, these areas are made up of the areas adjacent to the bolts, and more precisely under the washers.

Salt spray tests have demonstrated these contact areas.

The number of screws thus determines the effective cross-sectional area through which the current flows, which corresponds to the area under the washer (minus the screw hole).

This cross-section area must be close to that of the bar.

### Controlled temperature rise

Whatever the connection solution used, the quality and reliability of the contact is guaranteed, in particular with respect to temperature rise, as long as assembly is carried out according to our recommendations.

# Installation of the current transformer

## Practical information



Dismountable vertical busbars.

Choice of a CT model depends on the type of installation:

- insulated cables
- PrismaSeT P Active vertical busbars
- insulated flexible busbars
- Linergy LGY vertical busbars
- rigid busbars.

When installing a CT, we recommend that you comply with the following mounting rules:

- install current transformers:
  - on an easily dismantlable busbars or copper connections
  - between 2 connection points, by joints or bolted connection
- place the current transformer so that the identification markings remain readable.

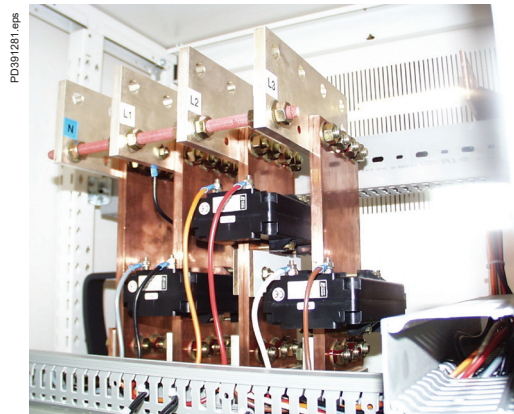
For large current transformers, a staggered installation is recommended to prevent arcing on fixing screws or excessive spacing between phase conductors.

If they are installed on vertical busbars, secure the current transformers in place to prevent them from slipping downwards (for example using a bolt or a pin)

- when there are several busbars per phase, fit spacers between the busbars in order to:
  - resist the tightening forces when installing the current transformer
  - avoid vibrations that lead to current transformer breakdowns.



CT on vertical busbars.



Spacers between the bars.


# Installation of the current transformer
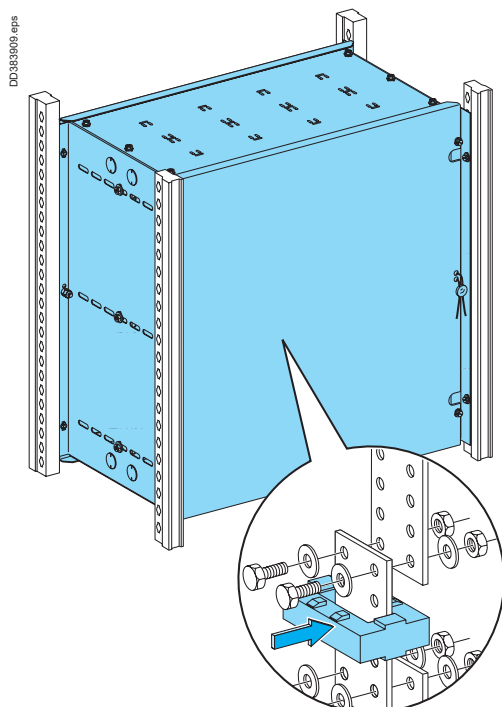
## Practical information


Our circuit breakers have trip units with a **built-in ammeter** (see Micrologic Catalog).  
Their use eliminates the need for installing a CT on the busbars.

**The CT casing** is a solution for installation of CTs up to 1600 A.  
CTs can be installed in the casing (cat. no. LVS03506).  
It is equipped with a frame made up of 2 uprights, adjustable in depth and 2 slotted cross-members to fix the cables, install CTs or install a busbar support with 75 mm spacing.  
It is secured in the switchgear compartment of a 400 or 600 mm deep cubicle.

**The 300 mm duct** allows easier mounting of CTs.  
To install 2 CTs, downstream from a circuit breaker for example, it is often easier to use a 300 mm wide duct (cat. no. LVS08403 for 400 mm depth or cat. no. LVS08603 for 600 mm depth).



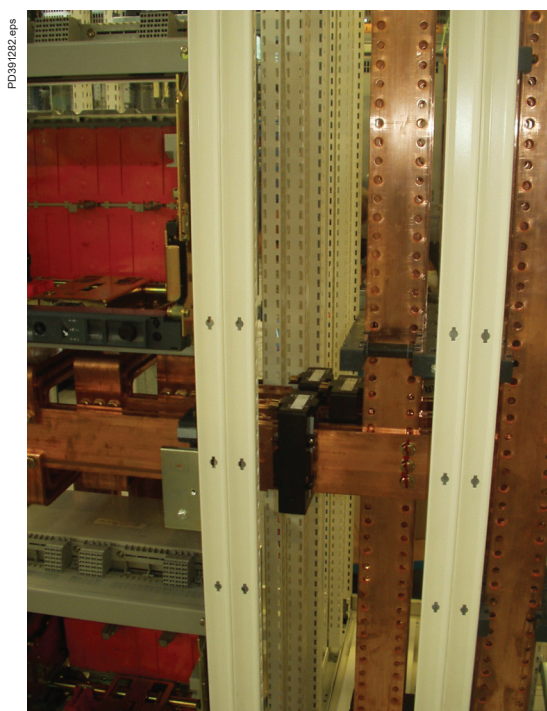Sealable CT casing with current transformers on bolted connections.



CT on circuit breaker downstream connection busbars.




# Installation of source changeover systems
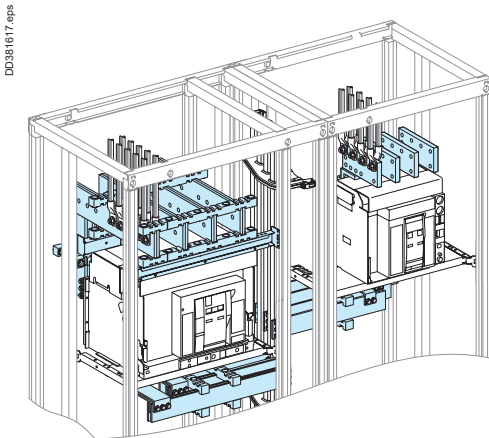
## Practical information



Source changeover system in the same cubicle.



Source changeover system in 2 combined cubicles.



### Principle of the PrismaSeT P Active solution

#### PrismaSeT P Active simplifies the installation of source changeover systems.

The "source changeover" solution is an integral part of the PrismaSeT P Active offering and is designed for all installation cases: 2 or 3 devices side by side or 2 superimposed devices.

The page opposite shows a few examples of installation in cubicles:

- 1 normal source/1 replacement source
- 2 normal sources with coupling (priority and non-priority circuits)
- 2 normal sources + 1 replacement source with coupling (priority and non-priority, circuits).

Note that our configuration software can be used to produce the switchboard front panel drawings.

For each source changeover configuration, various combinations of normal and replacement source circuit breakers and switch-disconnectors are possible:

- 1 normal source/1 replacement source:
  - NS630b to NS1600 / NS630b to NS1600
  - NT / NT
  - NT / NW
  - NW / NT
  - NW / NW

- 2 normal sources with coupling:
  - NW / NW / NW
  - NT / NT / NT
  - NW / NW / NW

- 2 normal sources + 1 replacement source with coupling:
  - NW / NW / NW / NW or NT.

Tables in the Catalog indicate the possible combinations "normal" and "replacement" devices according to the rating as well as the types of interlocking available for the different types of devices.

Highly economical vertical configurations are possible even for the largest devices.

In this case, interlocking may be:

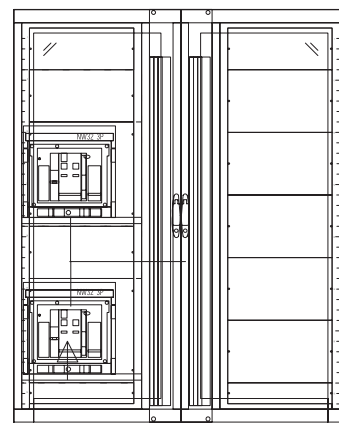
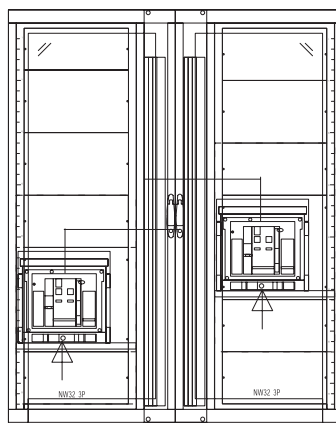
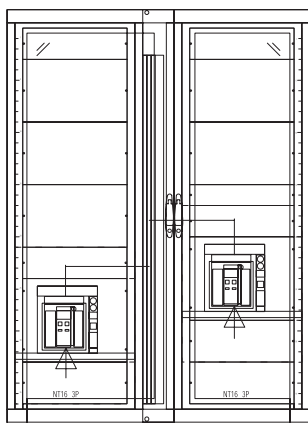
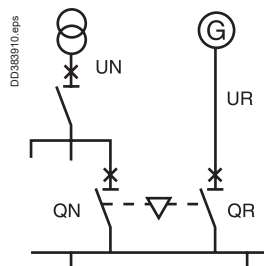
- mechanical by cable + motor mechanism
- via rotary handles (for NS630b/1600 only).

To define the number of modules required to install superimposed devices, all you have to do is add up the number of modules required for each device with:



- its connections
- its cover and its partitioning.

## Installation of source changeover systems



## Practical information



1 normal source  
1 replacement source

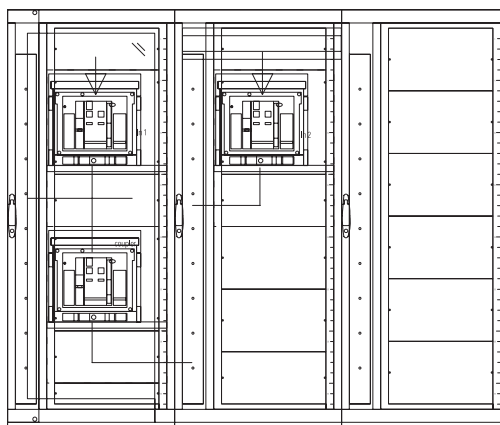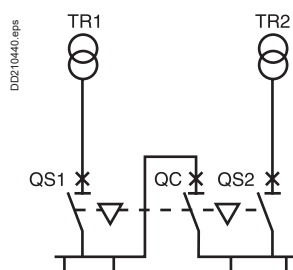

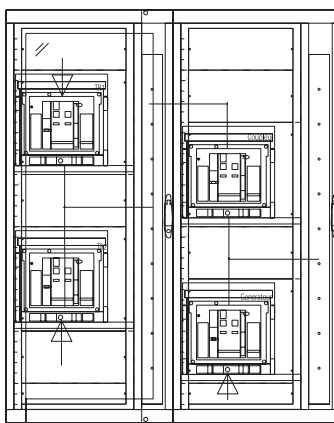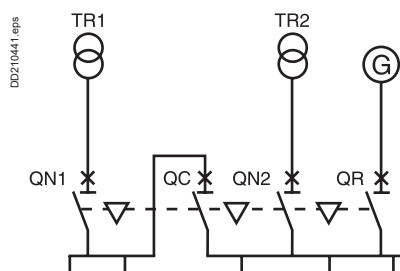2 normal sources and coupling on busbars



2 normal sources  
1 replacement source and coupling on busbars



## Storage recommendations

### Practical information

Cubicles must be stored in upright position in a dry and ventilated location, sheltered from rain, weather, dripping and running water, dust and chemical agents.

Apart from IP55 cubicles, never store enclosures outdoors, even under an awning or tarp.

The cubicles should if possible be left in their packing until they are installed. In this way they are protected against all risks that may be encountered on the site (impacts, splashes, etc.).

Acceptable storage temperatures are -25 °C to +55 °C (or up to +70 °C for short periods not exceeding 24 hours).

Given their heavy weight, cubicles should be stored on a stable, rigid and flat floor to avoid any risk of tipping during storage or handling.

## Packing information

### Practical information

#### Receiving the switchboard

On receipt of the equipment and before handling it, check that the cases and packing materials used for transportation have not been damaged and that all items on the packing list have been effectively delivered.

- Even if the packing appears to be in good condition, do not hesitate to unpack the equipment in the presence of an authorised transport agent.
- Check the contents and weights of the shipping units. Thoroughly check the equipment to make sure that no damage or shocks have occurred that could impair insulation or operation.
- If necessary, check that the information on the switchboard nameplate, located on the incoming cubicle, complies with the information indicated on the delivery slip.
- In case of damage or missing parts, inform the transport agent by registered mail.
- After this inspection, refit the plastic protective cover.

PrismaSeT P Active switchboards are generally shipped as separate cubicles or in transport units comprising 2 cubicles side by side. Shipping units may exceptionally comprise 3 cubicles (see precautions given in the "On-site handling" chapter).

Each shipping unit is marked with:

- project number
- weight
- packing unit information (packing unit number and total quantity)
- position of the centre of gravity
- storage and handling instructions.

#### Standard packing

The cubicles are protected by a plastic cover in a crate.

The following accessories are attached inside the switchboard:

- installation accessories (lifting/fixing cross-members and external fixing lugs)
- preliminary installation accessories: plinth raisers
- horizontal busbar joints (if required)
- additional nuts and bolts and other mounting hardware
- panels to be fitted after on-site connection: canopies, roof panels, gland plates
- a set of drawings
- device user manuals
- a tube of Swiss white varnish.

Large withdrawable or drawout circuit breakers installed at the top of the cubicle (MasterPacT and ComPacT NSX) are generally delivered separately.


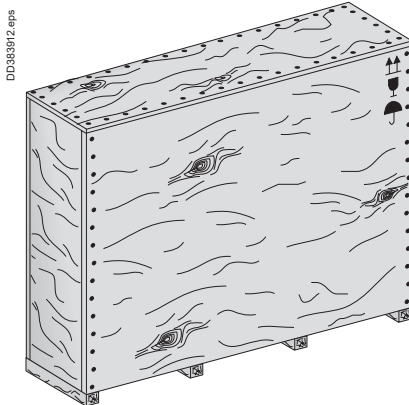
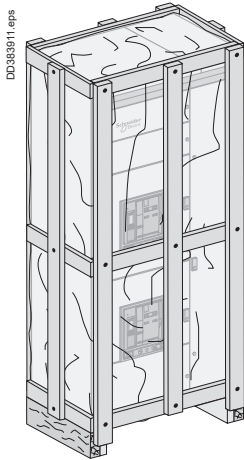
#### Sea packing

The cubicles are protected by a heat-sealed plastic cover containing desiccant bags and are installed in a ventilated wooden or plywood crate.

As a rule sea crates do not weigh more than 5 tons.

#### Sorting


In order to sort the different types of packing material, specific waste recovery bins are required.



## Handling on the site

## Practical information

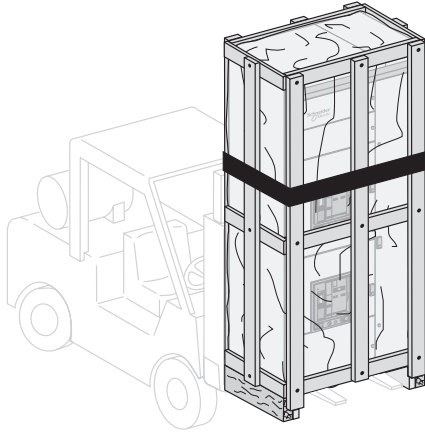DD388114.epa



Final unpacking of the equipment will preferably take place just before the switchboard is installed, as close as possible to its final installation location.

As a general guideline, the weight of an average 3200 A cubicle is around 400 kg. Cubicles should always be handled in the **upright position** with care, if possible **by 2 persons**. There is a risk of overtipping the cubicle due to the high position of the centre of gravity.

When moving the cubicles, always turn slowly and smoothly, avoiding all bumps and jerks. Enclosures moved using a forklift truck must be lifted carefully and held in position or fastened to the forklift truck using slings during transport.

## Handling by the bottom

Wooden beams (or framework stabilizers) are generally attached to the base of the cubicle framework. This allows the cubicles to be moved using a pallet mover or forklift truck.


 The forks must be placed symmetrically with respect to the cubicle's axis so as not to distort the base of the frame.

For cubicles fitted with a plinth, the front and rear base panels must be removed to allow insertion of the pallet mover forks.

Cubicles must be lifted with care and held in place during transport by strapping them onto the handling machine, especially for large distances or bumpy terrain.



For a PrismaSeT P Active switchboard with a busbar compartment, lifting points must be shifted towards the busbars.

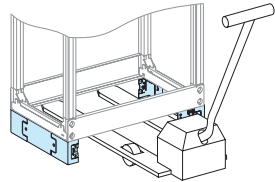Dd981333.epa



Framework stabiliser.



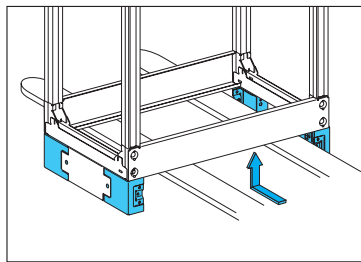
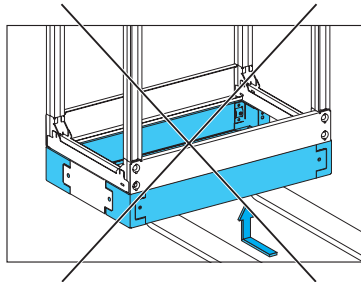
DD210573.epa



Cubicle with base.

## Handling on the site

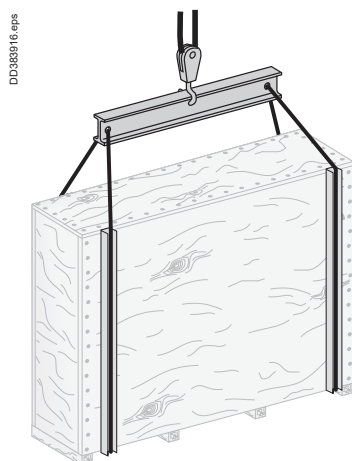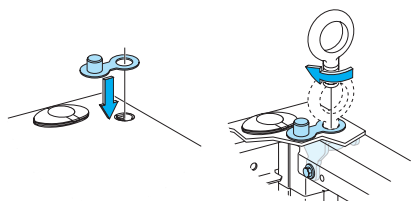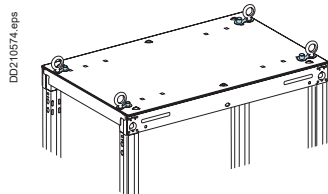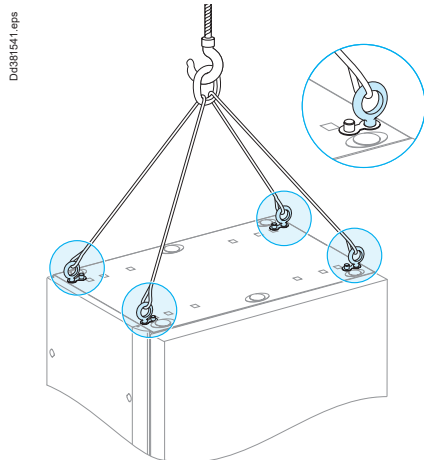
## Practical information



## Handling by the top

If cranes or overhead hoists are used, only slings that are sufficiently strong and in good condition should be used.

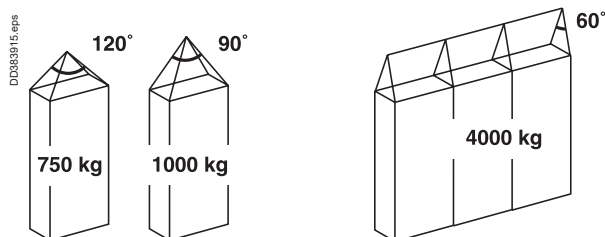- The slings must be attached to the 4 cubicle lifting lugs.
- Adjust the length of the slings according to the switchboard dimensions so that the angle formed does not exceed the angle indicated below depending on the switchboard weight. When 2 switchgear cubicles are combined, a lifting beam must be used.
- Never tilt the cubicle during handling.
- Take care to equally distribute the load on the 4 rings.




## Position of lifting rings

The lifting rings can be installed and removed without dismantling the roof.

Even with the lifting rings permanently installed, the switchboard retains its original degree of protection.

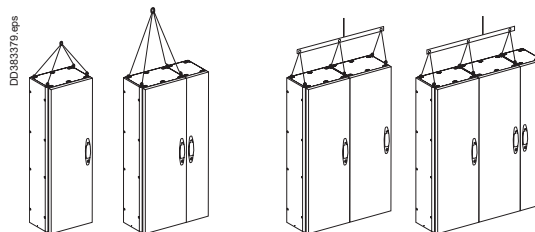For combined cubicles, only install lifting rings on cubicles with switchgear.



## Lifting several cubicles packed together

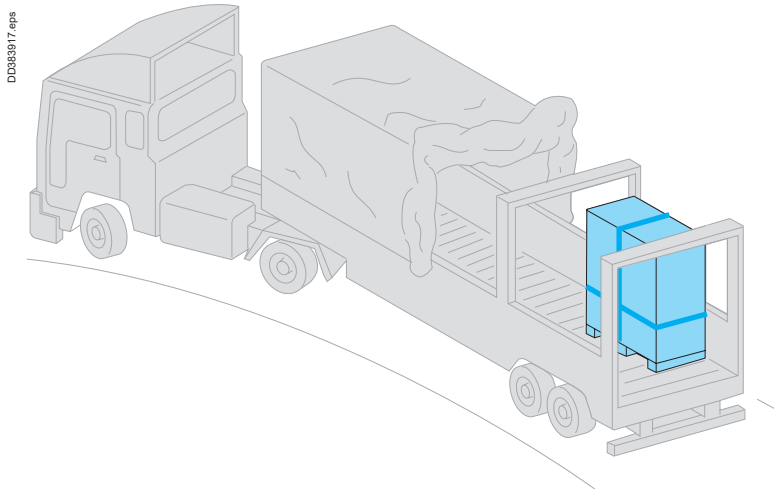
In the special case of an assembly with more than 2 cubicles, you must:

- first of all move the assembly in its original packing as close as possible to where it is to be installed
- use a lifting beam and slings to support the switchboard from underneath.


## Transport

## Practical information

The cubicles must be loaded vertically (stacking strongly discouraged).  
After loading, check that the equipment is firmly secured in the truck to avoid any risk of damage during transport.



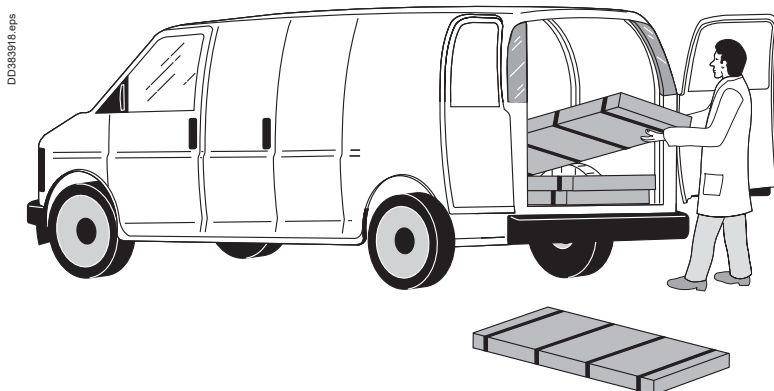
Enclosures supplied as kits should be transported horizontally if possible.




# Cubicle handling and rolling base Lifting reinforcement kit for combined cubicles

## Practical information

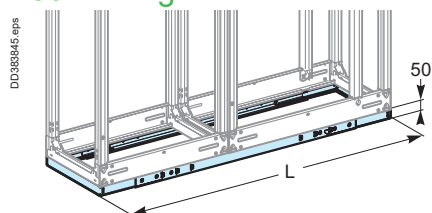
### 50 mm high base



LVS08714

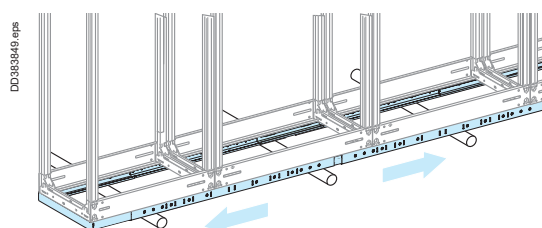

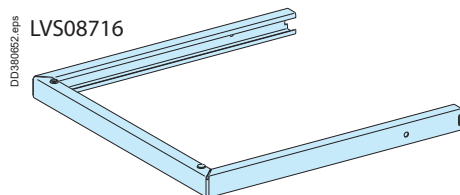Combined cubicles equipped with a handling base can be moved easily and safely on rollers.



LVS08716

This type of base is designed to increase the rigidity of cubicle frameworks to avoid any risk of deformation during transport and handling. Five different Catalog numbers offer 27 width possibilities (1200 to 3050 mm) for 400 and 600 mm deep cubicles.


■ Two Catalog numbers each include 2 end-pieces for handling bases for 400 and 600 mm deep cubicles respectively and the corresponding mounting hardware.

■ Three Catalog numbers each include 2 lengths for the sides of handling bases for 1200 to 3050 mm wide cubicles respectively and the corresponding mounting hardware.

Handling bases can be used for both side-by-side and back-to-back cubicle combinations.



In this case, the mounting hardware for one of the sets is used.

| Designation                          |                     | Cat. no. |
|--------------------------------------|---------------------|----------|
| 2 cubicle handling base end-pieces   | D = 400 mm          | LVS08714 |
|                                      | D = 600 mm          | LVS08716 |
| 2 cubicle handling base side-lengths | W = 2000 to 2550 mm | LVS08706 |

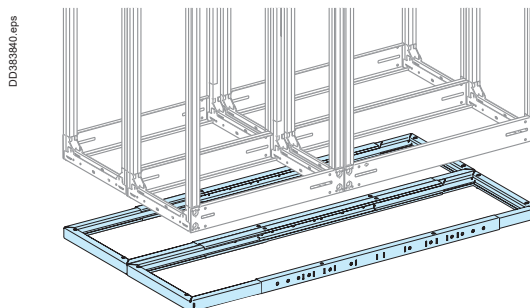

Side-by-side and back-to-back combination of 4 cubicles equipped with a handling base.

### Lifting reinforcement kit

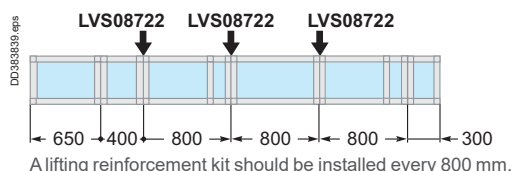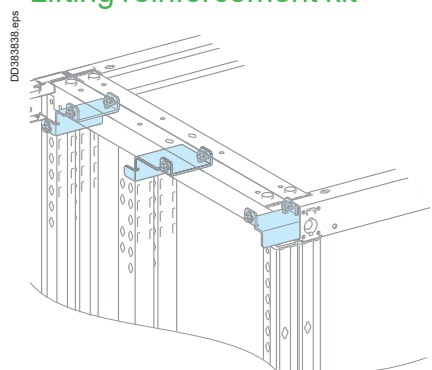

■ Kit LVS08722 is recommended for lifting combined cubicles and can be used together with handling base end-pieces LVS08714 for severe transport or handling conditions.

■ Catalog number LVS08722 includes 3 reinforcement brackets for 400 or 600 mm deep cubicles and the corresponding mounting hardware.

| Designation                                     |                | Cat. no. |
|-------------------------------------------------|----------------|----------|
| Lifting reinforcement kit for combined cubicles | W = 400/600 mm | LVS08722 |

# Connection of busbar trunking

## Practical information

PrismaSeT P switchboards come equipped with a special interface that allows them to be directly connected to Canalis KT trunking.

The electrical connection between the Canalis KT trunking and the PrismaSeT P switchboard is just as easy to carry out as jointing between two busbar trunking sections.

The Canalis KT interface is totally integrated in the PrismaSeT P switchboard volume.

It comprises a Canalis KT joint block and interface/circuit breaker connection terminals.

### Trunking connection via the top

- Dismantle the roof.
- Cut out a passage for the busbar trunking.
- Adjust the guides according to the KT width that will be connected.
- Unscrew the junction block screws.
- Ensure that the busbar trunking length to be connected to the switchboard is correctly supported and that it is not resting on the interface.
- Lower the element until it is in contact with the interface frame, without bearing on it.
- Tighten the junction torque nuts. When the head breaks, the torque of 60 Nm has been reached.


⚠ In certain cases, it is recommended to only tighten the 2 middle nuts to 60 Nm and the 2 outer nuts to 10 Nm.

- A red plastic washer that is ejected when the head breaks provides visual evidence that the joint tightening operation has been carried out correctly.
- For dismantling or maintenance operations, a second head is available on the nut and can be retightened using a conventional torque wrench. The recommended tightening torque is then 60 Nm.
- Reassemble the roof.

### Sealing kit

- In order to retain the original IP index, use the roof sealing kit ordered with the busbar trunking. This kit guarantees an IP52 degree of protection at the trunking passage.
- The kit is installed by cutting out the roof of the PrismaSeT P switchboard. This cut-out, which is the same dimension for all Canalis KT busbar trunking ratings, is made using the template delivered with the sealing kit.

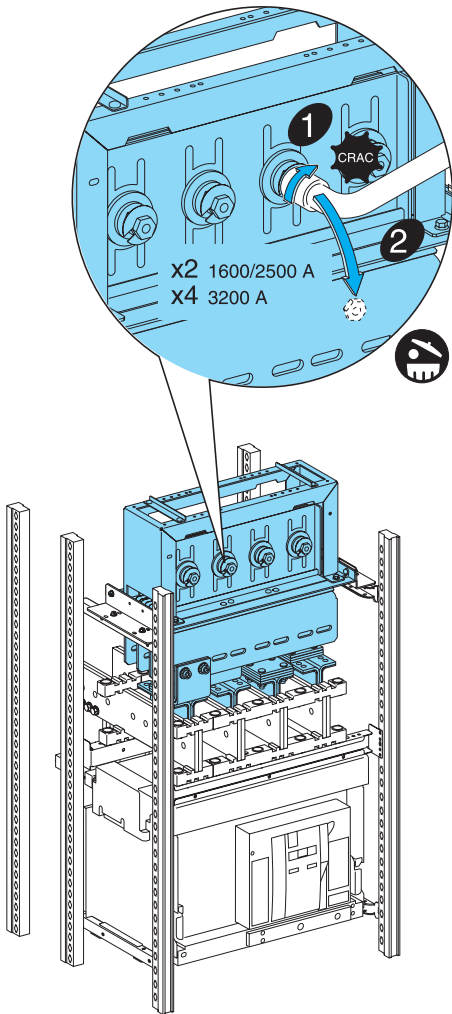DD380719-eps





# Connection of power cables

## Practical information

To ensure protection of persons, first connect the switchboard protective conductor to the earth electrode.

- Tie the cables as close as possible to the connections to avoid any mechanical stresses on the device terminals. When not using cable glands, also attach the cables near to the cubicle entry point.
- Cables must never be in contact with or passed between live conductors.
- Sharp edges of the framework must be protected where cables pass to avoid damaging the conductors.
- Comply with a minimum radius of curvature of 6 to 8 times the cable outside diameter.
- All power connections must be made with class 8.8 mounting hardware and elastic contact washers, tightened to the torque indicated in the table below.
- When connecting aluminium cables to copper terminals, use bimetal lugs or interfaces.
- Separate the different types of circuits into separate cable bundles (power, control, 48 V, 24 V, DC, AC, etc).

### Cable bundles

| Cable cross-sectional area (mm <sup>2</sup> ) | Max. number of cables per bundle |
|-----------------------------------------------|----------------------------------|
| CSA ≤ 10                                      | 8                                |
| 16 < CSA ≤ 50                                 | 4                                |
| CSA ≥ 50                                      | Tie individually                 |

### Tying the cable bundles

| Type of tie                  | Maximum l <sub>cw</sub> (kA/rms 1s) | Distance between ties (mm) |
|------------------------------|-------------------------------------|----------------------------|
| Width: 4.5 mm<br>Load: 22 kg | 10                                  | 200                        |
|                              | 15                                  | 100                        |
|                              | 20                                  | 50                         |
| Width: 9 mm<br>Load: 80 kg   | 20                                  | 350                        |
|                              | 25                                  | 200                        |
|                              | 35                                  | 100                        |
|                              | 45                                  | 70                         |

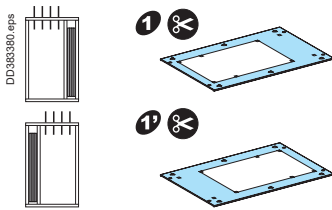
For cable sizes of 50 mm<sup>2</sup> or more, use 9 mm wide fixing ties.

**Recommended tightening torque** for mechanical and electrical connections with 8.8 class screws.

| Diameter of screw | Tightening torque (Nm) (with nut + contact washer) |
|-------------------|----------------------------------------------------|
| M3                | 1.5                                                |
| M4                | 3.5                                                |
| M5                | 7                                                  |
| M6                | 13                                                 |
| M8                | 28                                                 |
| M10               | 50                                                 |
| M12               | 75                                                 |

# Connection of power cables

## Practical information



### Connection via the top

- Remove the roof.
  - Drill the holes required to install cable glands or grommets.
  - Install the cable glands or grommets. They must comply with the switchboard's degree of protection (IP).
  - Refit the roof.
  - Run the cables through the glands or grommets.
  - Run the cables in the intended compartments and secure them to cable tie-bars every 400 mm.
  - Crimp the lugs and connect.
  - When sealing does not call for cable glands or when sealing is achieved by means of foam, cables can be routed in a rectangular cut-out in the roof.
- The removable cross-member simplifies insertion of cables in the cubicle.

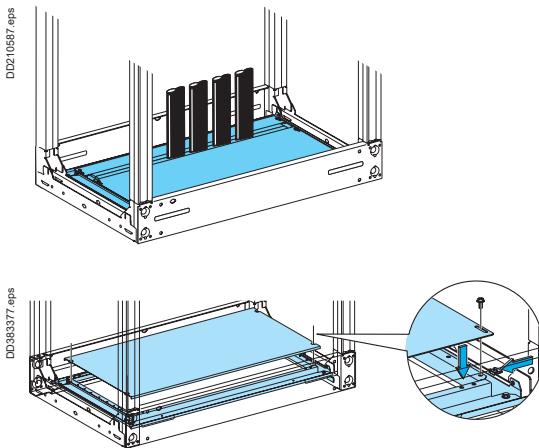
### Connection via the bottom

#### Using a 2-part gland plate

- Drilling is not necessary with this type of gland plate.
- The gland plate avoids producing an induced current.
- The cables are protected by a polyurethane foam seal which provides a sealing function.

#### Using a 1-part gland plate

- Remove the bottom plate.
- Drill the appropriate holes to assemble the cable glands or grommets (1-part gland plates should not be drilled within 30 mm of the edges).
- Install the cable glands or grommets. They must comply with the required degree of protection (IP).
- Refit the bottom plate.
- Run the cables through the glands or grommets.
- Run the cables in the intended compartments and secure them to cable tie-bars every 400 mm.
- If cable glands are not used, it may be easier to prepare the cable terminations outside the switchboard (e.g. lug crimping) and then to drop them inside the cubicle having first disassembled the bottom removable cross-member.




### Covering an incomer

#### For MasterPact MT22 / MTZ1 / NS1600b-3200 / ComPacT NS630b-1600

- Disassemble the cover plate to access to the device connection terminals.
- Connect the cables, respecting the required electrical clearances.
- Cut out the part of the cover disassembled in order to let the cables pass through it, while preserving the necessary degree of protection.

## Connection of power cables
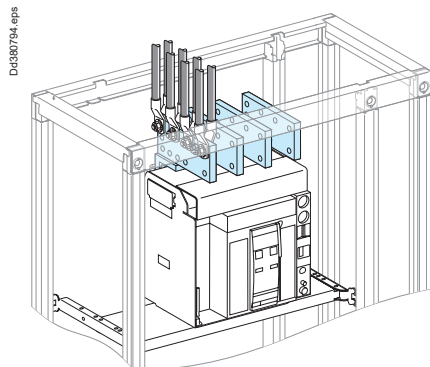
### Practical information



Removable upper cross-member.

#### Connecting to terminal extension bars

- Check that the circuit and switchgear identification indications match.
- When connections are made to terminal extensions made up of several bars for each phase, position the lugs opposite one another and insert copper spacers between the bars.
- Comply with the minimum required electrical clearances between phases of 14 mm (conforming with IEC 60439-1).
- Mark all nuts and the terminal extension bars with a dot of varnish after tightening to the defined torque.
- Remove the top cross-member of the cubicle to simplify connection of the cables to the bars.
- Tie cables of the same phase together.

#### Connection directly to device terminals

- When connections are made directly to the switchgear terminals, comply with the tightening torque recommended by the device manufacturer.
- Check that the length of the screws delivered with the switchgear is compatible with the lug thickness.
- Comply with the safety clearances around the switchgear devices, defined by the manufacturer to ensure correct operation.
- Refit the interphase barriers and terminal shields if applicable after connection the power cables.
- For the special case of connection with armoured cable, please consult us.

## Preventive maintenance

## Maintenance

## Frequency

- The frequency of preventive maintenance depends primarily on the operating conditions of the electrical switchboard.
- For operating conditions found in normal environments, the frequency should be as indicated in the recommended calendar.
- It may be extended if the switchboard is used in a particularly clean environment and not in an intensive manner.
- It must be reduced if the switchboard is used in a particularly aggressive environment (dust, humidity, corrosive vapours, heat) or is used intensively.
- Recommended calendar

| Type                              | Action                                                                           | Frequency      |
|-----------------------------------|----------------------------------------------------------------------------------|----------------|
| General inspection                | Visual checks and general cleaning.<br>Visual check of busbars.<br>Running tests | Once a year    |
| Maintenance on functional units   | Inspection of the connections                                                    | Every 5 years  |
| Maintenance of ventilation system | Cleaning of filters                                                              | Every 6 months |
| Maintenance of devices            | According to the respective handbooks                                            |                |

## General recommendations

Before any intervention on the connections, switch off the functional unit, remove the protective screens and the partitioning sheets and boxes.

- For interventions on the connections, refer to chapter "Connections", profession Install.
- When reassembling the connections:
  - use new screws, washers, nuts of the same type (class 8.8)
  - tighten to the defined torque (refer to the tightening torques table in the chapter "Connection/Tools required")
  - apply varnish.

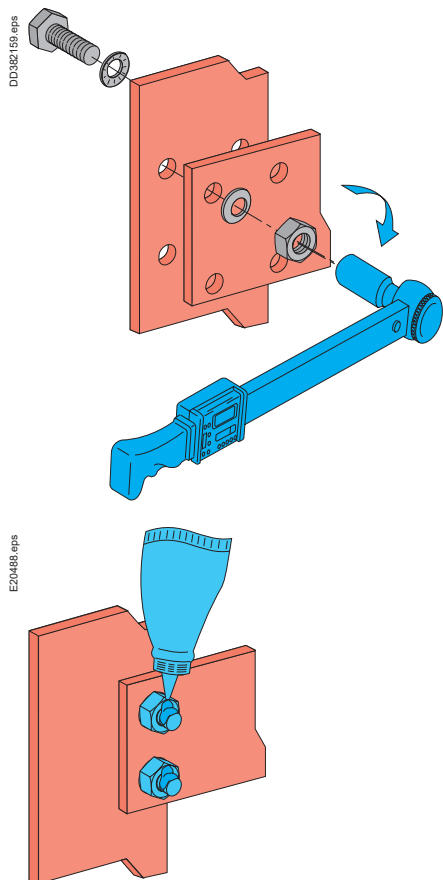
## Method of inspection of the electrical connections

- Connections by lugs or screwed bars: presence of varnish, colour changes of a copper bar.
- Connections by cage type terminals: if necessary, re-screw to the torque defined by the manufacturer to compensate for a possible creep.

**Please ensure that you consult the "General" chapter section dealing with safety instructions.**

## Preventive maintenance

## Maintenance



## General inspection

## Visual checks and general cleaning of the cubicles

- Check the lack of humidity and foreign bodies inside and outside the switchboard.
- Examine the outer finish. If necessary, touch up any paint scratches and replace any damaged or rusted parts.
- Clean the switchboard, preferably with a vacuum cleaner.
- If necessary, clean the ventilation system and change the filters.

## Visual check of busbars

- Connections do not need to be tightened as they were already tightened to the tightening torque in workshop and the use of a contact washer compensates for possible creeps due to overheating. The presence of vernish guaranteeing correct tightening torque, is intact.
- The control of busbars connections and outgoing cables connections can be carried when disassembling the protection (out of supply) or if a hot point is detected (infrared control or thermal sensors). A hot point materialises by a change in the copper colour.
- In case of hot point see "Corrective maintenance".
- Check the condition of insulating busbars supports.

## Cleaning of panel ventilation filters

## Standard or fine filters

- Wash with water (preferably using a high-quality detergent).
- It is also possible to remove the dust by tapping, vacuuming or blowing with compressed air.
- If there is any oil or grease, change the filter.

## Corrective maintenance

### Maintenance

#### General

##### General recommendations

- Before any intervention on the connections, switch off the cubicle, remove the protective screens and the partitioning sheets and boxes.
- When reassembling the connections:
  - use new screws, washers, nuts of the same type (class 8.8)
  - tighten to the defined torque (refer to the tightening torque table in chapter "Connection/Connection of power cables")
- apply varnish.

#### Hot point

##### Screwed connection

- Identify the cause: generally a loosening connection.
- Dismantle the assembly.
- Clean and rub down surfaces in contact (e.g. sandpaper N° 400).
- Set the connection up.

#### Maintenance after a fault has occurred

The high currents resulting from a fault cause damage to structures, components, busbars and cables.

**Following a fault, contact your local Schneider Electric office.**

#### Troubleshooting and interventions

For any interventions other than those described in this manual, **contact your local Schneider Electric agency.**





Life Is On



**Schneider Electric Industries SAS**

35, rue Joseph Monier  
CS 30323  
92506 Rueil Malmaison Cedex  
France

RCS Nanterre 954 503 439  
Capital social 896 313 776 €  
[www.se.com](http://www.se.com)

10-2022  
DESW026EN

© 2022 - Schneider Electric. All Rights Reserved.  
All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies.  
Document reference: DESW026EN

This document has been  
printed on recycled paper

